

Eaton®

Quick Disconnect Couplings Master Catalog

Europe, Middle East
and Africa



EATON

Powering Business Worldwide

Table of Contents

Safety Information	3
Fluid Compatibility	4
Safeline Operation Guidelines.....	149
Fluid Transfer and Hydraulic	
HK ISO 7241/1B Series Interchange	8
H15000 Series ISO 7241-1 A Interchange.....	17
5600 ISO 7241-1 A Series Interchange	19
IA Series ISO 7241-1 A Interchange	21
H5000 Series.....	24
FF Series	33
MLFF Series	38
FFCup Series	40
FD49 Series.....	42
FD96 Series.....	44
MLDB Series	46
5100 Series.....	48
FD85 Series.....	52
FD86 Series.....	54
W46000 Series.....	56
W36000 Series.....	57
GA90090 Series	61
W6000 Series.....	62
HP3 Series.....	68
WA56000 Series	69
FD35 Series.....	70
2UH Series	72
Pneumatic	
Safeline Series.....	74
CC Series.....	85
1000 Series.....	86
G600 Series.....	90
G700 Series.....	93
I900 Series	95
I1000 Series.....	97
T1100 Series	99
T1300 Series.....	101
Blow Guns	103
Adapters	104
Hose Reels	110
Eaton Quick Disconnect Couplings – Customizing Solutions for the Future... Hydraulics and Beyond	
For over 90 years, Eaton has continued to manufacture and supply the highest performing quick disconnect couplings globally for many different market segments including agriculture, construction, transportation, and fire and rescue just to name a few. Eaton's quality and performance have never been compromised when it comes to engineering and manufacturing its full line of quick disconnect couplings. From traditional industry standards to custom couplings for the next generation of emerging markets and new advanced technologies, Eaton continues to provide quick disconnect coupling solutions to meet your demands.	
Custom Design Capability – One Application at a Time	
Eaton continues the tradition of developing custom quick disconnect couplings for customers that need a product to perform above and beyond industry standards. Whether it is a custom coupling for the world's most powerful and sophisticated super computers that use electronic cooling or a self contained breathing apparatus coupling for first responders, Eaton has the ability to work directly with you on a solution. Contact Eaton to see how our dedicated and experienced design engineering team will work with you to develop a quick disconnect coupling solution.	
Special Applications	
FD17 Series	111
FD69 Series	112
FD83 Series	114
2HKIG/2HKIL Series	115
J50000 Series.....	118
J70000 Series.....	119
ST Series	121
L7000 Series	125
In-Line Check Valves	131
Diagnostic	
FD15 Series	137
FD90 Series	139
Agriculture	
FD48 Series	141
K8000 Series	142
Q9000 Series.....	143
H55000 Series.....	144
Refrigerant	
5400 Series	145

Safety Information for Eaton Quick Disconnect Couplings

1.0 General Instructions.

- 1.1 Scope.** The scope of this safety bulletin is to warn against improper selection, use, installation, etc. of Eaton coupling products.
- 1.2 Distribution.** A copy of this safety bulletin should be distributed to all individuals responsible for using and/or selecting Eaton coupling products.
- 1.3 Fail-Safe.** Design all systems and equipment for fail-safe operation such that failure of any component does not result in personal injury and/or property damage.
- 1.4 User Responsibility.** It is the sole responsibility of the user to select and determine that the Eaton product is compatible with the end use application. The user is responsible for reading and following this safety bulletin as well as any instructions or literature on the Eaton product being used. The user must provide necessary product warnings for Eaton couplings products, used with systems or equipment, to the operators of the systems or equipment.
- 1.5 Usage with other Manufacturers' Products.** When using Eaton coupling products with other manufacturers' adapters, hoses, etc., do not exceed the lowest pressure rating of any of the components being used or rupture may result.

2.0 Selection of Eaton Couplings.

- 2.1 Pressure.** Ensure that the maximum operating pressure of the system or equipment does not exceed the rated operating pressure of the Eaton coupling product or rupture may result.
- 2.2 Fluid Compatibility.** Verify that all components (seals, metals, etc.) are compatible with the fluid being conveyed. Failure to do so may result in high speed fluid discharge and/or leakage of fluids which may be flammable, toxic, at extreme temperatures, or otherwise harmful.
- 2.3 Temperature.** Ensure that the maximum operating temperature of the system or equipment does not exceed the rated operating temperature of the Eaton coupling product (including seals) or rupture may result.
- 2.4 Coupling Size.** Use properly sized couplings such that there is not a large pressure drop across them thus avoiding system damage due to excessive heat generation or failure of internal components.
- 2.5 Sleeve Lock.** Use sleeve locks or threaded couplings where there is the possibility of accidental disconnection. Failure to utilize sleeve locks or threaded couplings in these applications may result in hose whip, expelled components, high speed fluid discharge, system damage, or leakage of fluids which may be flammable, toxic, at extreme temperatures, or otherwise harmful.

2.6 Connect or Disconnect Under Pressure.

If connection and/or disconnection of couplings under pressure is a requirement, only use couplings designed for connection/disconnection under pressure. Failure to utilize this type of coupling in that application may result in hose whip, expelled components, high speed fluid discharge, and/or system damage. Be certain not to confuse the rated operating pressure with the rated connect/disconnect under pressure.

- 2.7 Environment.** Ensure that Eaton couplings are compatible with the surrounding environment. The surrounding environment may be heat, salt water, moisture, chemicals, and the like. Failure to protect against an adverse environment may cause system damage, premature failure, and/or leakage of fluids which may be flammable, toxic, at extreme temperatures, or otherwise harmful.

- 2.8 External Loads.** Avoid any external loads such as side loads, tensile loads, vibration, etc. Failure to do so may result in accidental disconnection, premature failure, system damage, and/or leakage of fluids which may be flammable, toxic, at extreme temperatures, or otherwise harmful.

- 2.9 Welding & Brazing.** Extreme heating of plated products above +450°F (+232°C) such as welding, brazing, baking, etc., where the plating is burned off, may result in the release of deadly gases.

3.0 Installation of Eaton Couplings.

- 3.1 Inspection of Product.** Prior to installation, ensure that the Eaton product meets all of the requirements of the system and/or equipment it is to be used on. Ensure you have the correct part number, function test the coupling by connecting it with a mating half. The function test should result in smooth, non-binding operation or premature failure may result.

- 3.2 Cleanliness.** Use end caps and plugs to reduce the risk of system contamination or damage to critical sealing surfaces. Failure to do so may result in leakage of fluids which may be flammable, toxic, at extreme temperatures, or otherwise harmful. Caps and plugs are not a secondary seal unless explicitly noted.

- 3.3 Location.** Place Eaton couplings in a safe location such as not to expose the user to personal injury (slippage, tripping, falling, etc.) during installation, connection, disconnection and maintenance.

- 4.0 Product Maintenance.** A maintenance schedule should be put in place to ensure that Eaton couplings are functioning properly. Eaton is not responsible for product failures resulting from modification or improper maintenance.

- 4.1 Inspection.** Visually inspect to ensure that there is no leakage, cracked components, corrosion build-up, contamination build-up, wear, etc. If any abnormality is encountered, the coupling should be replaced immediately.

Fluid Compatibility

This chart indicates the suitability of various elastomers and metals for use with fluids to be conveyed. It is intended for use with Eaton couplings and should not be used to determine compatibility for other products. It is intended as a guide only and is not a guarantee. Final selection of the proper seal or material of metal components is further dependent on many factors including pressure, fluid and ambient temperature, concentration, duration of exposure, etc.

How to Use the Chart

- Both the elastomer and the metal must be considered when determining suitability of combination for a coupling.
- Locate the fluid to be conveyed and determine the suitability of the elastomeric and metal components according to the resistance rating shown for each.
- Dimensional and operation specifications for each coupling can be found on the catalog pages.
- Information on seal options for couplings, and how to specify them, are shown in the respective sections of this catalog.
- Be sure to check the table below for maximum operating temperature range of the elastomer desired.
- For further details on the products shown in this catalog, and their applications, consult your Eaton Sales Representative or Eaton Technical Support.
- Coupling component materials may differ from body material. Refer to specific catalog pages.

This charts below are intended for reference use only. The information in this chart pertains strictly to material compatibility and is not intended to be used as an application guide.

E=Excellent

G=Good

C=Conditional

U=Unsatisfactory

Fluid	Seals				Metal			
	Buna-N	Neoprene	FPDM/EPDM	FKM	Steel	Brass	Stainless Steel	Aluminum
Acetaldehyde	U	C	C	U	G	E	E	E
Acetic Acid, 10%	U	U	E	G	U	U	C	C
Acetic Acid, Glacial	U	U	C	U	U	U	C	C
Acetone	U	U	G	U	E	E	E	E
Acetophenone	U	U	E	U	E	E	E	C
Acetyl Acetone	U	U	G	U	U	C	C	C
Acetyl Chloride	U	U	U	E	C	C	C	U
Acetylene (1)	G	U	G	E	E	E	E	E
Air, Hot (Up to +160°F)	E	E	E	E	E	E	E	E
Air, Hot (161°F – 200°F)	C	G	E	E	E	E	E	E
Air, Hot (201°F – 300°F)	U	U	G	E	E	E	E	E
Air Wet, below 160°F	E	E	E	E	U	G	E	E
Aluminum Chloride, 10% aq	E	E	E	E	U	U	U	U
Aluminum Fluoride, 10% aq	E	E	E	E	U	U	U	E
Aluminum Nitrate, 10% aq	E	E	E	E	U	U	C	C

Seal Elastomer Data*

Seal Elastomer**	Max. Operation Temperature Range
Buna-N	-40°F to +250°F (-40°C to +121°C)
Neoprene	-65°F to +212°F (-54°C to +100°C)
EPDM	-65°F to +300°F (-54°C to +149°C)
FKM	-15°F to +400°F (-29°C to +204°C)

*For reference only, based on Eaton recommended temperatures.

**For seals not listed contact Eaton.

Contact Eaton technical support for further information.

Resistance Rating Key

E = Excellent – Fluid has little or no effect

G = Good – Fluid has minor to moderate effect

C = Conditional – Service conditions should be described to Eaton for determination of suitability for application

U = Unsatisfactory

The differences between ratings "E" and "G" are relative. Both indicate satisfactory service. Where there is a choice, the materials rated "E" may be expected to give better or longer service than those rated "G".

Fluid	Seals				Metal			
	Buna-N	Neoprene	FPDM/EPDM	FKM	Steel	Brass	Stainless Steel	Aluminum
Aluminum Sulfate, 10% aq	E	E	E	E	U	C	E	C
Alums, 10% aq	E	E	E	E	U	C	E	C
Ammonia, Cold	E	E	E	U	E	U	E	E
Ammonia, Hot	U	G	G	U	E	U	E	E
Ammonia, Anhydrous	G	G	E	U	E	U	E	E
Ammonia, Aqueous	E	E	E	U	E	U	E	E
Ammonium Carbonate, 10% aq	U	E	E	U	C	U	C	C
Ammonium Chloride, 10% aq	E	E	E	U	U	U	C	U
Ammonium Hydroxide, 10% aq	C	C	E	C	G	U	C	C
Ammonium Nitrate, 10% aq	E	G	E	U	G	U	G	G
Ammonium Phosphate, 10% aq	E	E	E	–	U	C	G	U
Ammonium Sulfate/Sulfide, 10% aq	E	E	E	U	U	U	G	U
Amyl Acetate	U	U	G	U	E	E	E	E
Amyl Alcohol	G	C	E	G	G	G	E	U
Aniline, Aniline Oil	U	U	G	U	E	U	E	G

Fluid Compatibility

E=Excellent
G=Good
C=Conditional
U=Unsatisfactory

Fluid	Seals				Metal			
	Buna-N	Neoprene	FPDM/EPDM	FKM	Steel	Brass	Stainless Steel	Aluminum
Aniline Dyes	U	G	G	U	C	G	C	
Asphalt, < 200°F	G	C	U	E	E	G	E	C
IRM 901 Oil	E	E	C	E	E	E	E	
IRM 902 Oil	E	G	U	E	E	E	E	
IRM 903 Oil	E	C	U	E	E	E	E	
Automatic Trans. Fluid	E	C	U	E	E	E	E	E
Barium Chloride, 10% aq	E	E	E	E	U	G	G	G
Barium Hydroxide, 10% aq	E	E	E	E	G	U	G	U
Barium Sulfide, 10% aq	E	E	E	E	C	U	G	U
Benzene, Benzol	U	U	U	E	G	E	E	G
Benzoic Acid	U	U	U	E	U	G	G	G
Benzyl Alcohol	U	G	G	E	E	G	E	G
BioDiesel (<B20)	G	C	U	E				
BioDiesel (>B20)	G	C	U	E				
Black Sulfate Liquor	C	C	C	E	E	C	E	U
Blast Furnace Gas	U	U	U	E	E	C	E	U
Borax, 10% aq	G	G	E	E	E	E	E	G
Boric Acid, 10% aq	G	G	G	E	U	G	C	C
Brine	E	G	E	E	U	G	G	U
Bromine, Dry	U	U	U	E	U	C	U	C
Butane	E	C	U	E	E	E	E	E
Butyl Acetate	U	U	G	U	E	E	E	E
Butyl Alcohol	E	E	G	E	G	G	G	G
Butyl Cellosolve	U	U	G	U	E	E	E	E
Butylene (Butene)	C	U	U	E	E	E	E	E
Butyl Stearate	G	U	U	E	G	G	G	G
Butyraldehyde	U	U	G	U	E	E	E	E
Calcium Acetate, 10% aq	G	G	E	U	G	G	G	C
Calcium Bisulfate, 10% aq	E	E	U	E	U	C	C	U
Calcium Chloride, 10% aq	E	E	E	E	G	G	G	C
Calcium Hydroxide, 10% aq	E	E	E	E	G	G	G	U
Calcium Hypochlorite, 10% aq	U	U	E	E	U	G	C	U
Calcium Nitrate, 10% aq	E	E	E	E	G	G	G	G
Carbitol	G	G	G	G	E	E	E	E
Carbolic Acid (Phenol)	U	U	G	E	U	E	E	-
Carbonic Acid	G	E	E	E	U	C	E	G
Carbon Dioxide, Dry Gas	G	G	E	E	E	E	E	E
Carbon Disulfide	U	U	U	E	G	G	G	E
Carbon Monoxide	G	G	E	E	E	E	E	E
Carbon Tetrachloride	U	U	U	E	U	G	G	U
Castor Oil	E	E	G	E	E	E	E	E
Cellosolve Acetate	U	U	G	U	U	U	E	G
China Wood Oil (Tung Oil)	G	G	U	E	E	G	E	E
Chlorine Gas, Dry	U	U	U	G	C	C	C	C
Chloroacetic Acid	U	U	G	U	U	U	U	U
Chloroacetone	U	U	E	U	G	G	G	U
Chlorobenzene	U	U	U	G	G	G	G	G
Chloroform	U	U	U	E	G	G	G	G
O-Chlorophenol	U	U	U	E	G	G	G	U
Chlosulfonic Acid	U	U	U	U	G	U	G	G
Chrome Plating Solution	U	U	G	E	C	U	U	U
Fluid	Seals				Metal			
	Buna-N	Neoprene	FPDM/EPDM	FKM	Steel	Brass	Stainless Steel	Aluminum
Chromic Acid	U	U	C	E	C	U	U	U
Citric Acid	E	E	E	E	C	C	C	C
Coke Oven Gas	U	U	U	E	E	C	E	U
Copper Chloride, 10% aq	E	E	E	E	U	U	U	U
Copper Cyanide, 10% aq	E	E	E	E	E	U	G	U
Copper Sulfate, 10% aq	E	E	E	E	U	C	G	U
Cotton Seed Oil	E	G	C	E	E	E	E	E
Creosote (Coal Tar)	G	C	U	E	E	C	E	E
Crude Oil	E	G	U	E	G	U	G	U
Cyclohexanol	E	G	U	E	E	E	E	C
Cyclohexanone	U	U	G	U	E	E	E	C
Detergent/Water Solution	E	E	E	E	G	E	E	E
Diacetone Alchohol (Acetol)	U	U	E	U	E	E	E	E
Dibenzyl Ether	U	U	G	U	G	G	G	G
Diesel Oil	E	C	U	E	E	E	E	E
Diethylamine	G	G	G	U	E	U	E	-
Diocetyl Phthalate (DOP)	U	U	G	G	E	E	E	E
DOT #3 / #4 Brake fluid	C	U	E	U	E	C	E	E
Dowtherm A&E	U	U	U	E	G	U	E	E
Ethyl Alcohol (Ethanol)	E	E	E	E	E	E	E	G
Ethyl Acetate	U	U	G	U	E	E	E	E
Ethyl Benzene	U	U	U	E	E	G	G	G
Ethyl Cellulose	G	G	G	U	E	G	G	G
Ethyl Chloride	U	U	U	E	E	E	E	G
Ethylene Dichloride	U	U	U	G	G	C	G	G
Ethylene Glycol	E	E	E	E	U	G	E	E
Ferric Chloride, 10% aq	E	G	E	E	U	U	U	U
Ferric Nitrate, 10% aq	E	E	E	E	U	U	G	U
Ferric Sulfate, 10% aq	G	G	G	E	U	U	E	U
Formaldehyde	C	C	G	G	E	E	E	G
Formic Acid	C	G	E	U	U	C	C	C
Fuel Oil	E	C	U	E	E	E	E	E
Furfural	C	C	G	U	G	G	G	G
Gallic Acid, Solution	G	G	G	E	U	-	G	C
Gasoline	E	U	U	E	E	E	E	E
Gasohol	G	U	U	E	E	E	E	G
Glycerine/Glycerol	E	E	E	E	E	G	E	E
Green Sulfate Liquor	G	G	E	E	U	U	E	U
Helium (1)	E	E	E	E	E	E	E	E
Heptane	E	G	U	E	E	E	E	E
Hexaldehyde	U	G	G	U	G	G	E	E
Hexane	E	G	U	E	E	E	E	E
Hydraulic Oils, petroleum based	G	C	U	E	E	E	E	E
Ester Blend	E	U	U	E	E	E	E	E
Phos. Ester/Petroleum Blend	U	U	U	C	E	E	E	E
Silicone Oils	E	E	E	E	E	E	E	E
Straight Petroleum Base	E	C	U	E	E	E	E	E
Straight Phosphate Ester	U	U	G	C	E	E	E	E
Water Glycol	E	E	E	E	E	E	E	G
Water Petroleum Emulsion	E	G	U	E	C	E	E	G
Hydrobromic Acid	U	U	E	E	E	U	E	E

Fluid Compatibility

E=Excellent
G=Good
C=Conditional
U=Unsatisfactory

Fluid	Seals		Metal					
	Buna-N	Neoprene	FPDM/EPDM	FKM	Steel	Brass	Stainless Steel	Aluminum
Hydrochloric Acid, Cold	U	U	G	E	U	U	U	U
Hydrocyanic Acid	C	C	E	E	E	E	G	E
Hydrofluoric Acid	U	U	C	U	U	U	U	U
Hydrofluorosilic Acid	G	G	E	E	U	U	U	U
Hydrogen	E	E	E	E	E	E	E	E
Hydrogen Peroxide	G	G	G	E	U	U	G	E
Hydrogen Sulfide, Dry	U	G	E	U	E	G	G	G
Isocyanate	U	U	G	E	G	—	G	—
Iso Octane	E	G	U	E	E	E	E	E
Isopropyl Acetate	U	U	G	U	E	—	E	E
Isopropyl Alcohol	G	G	E	E	E	E	E	G
Isopropyl Ether	G	U	U	U	G	G	G	—
JP-4, JP-5	E	U	U	E	E	E	E	E
Kerosene	E	U	U	E	E	E	E	E
Lacquer/Lacquer Solvents	U	U	U	U	U	E	E	E
Lime Sulfur	U	E	E	E	G	U	G	—
Linseed Oil	E	G	U	E	E	E	E	E
LPG	E	G	U	E	E	E	E	E
Magnesium Chloride, 10% aq	E	E	E	E	E	C	C	G
Magnesium Hydroxide, 10% aq	G	G	E	E	E	G	E	G
Magnesium Sulfate, 10% aq	E	E	E	E	E	E	E	E
Maleic Acid	U	U	U	E	E	G	G	G
Maleic Anhydride	U	U	U	E	G	U	E	G
Malic Acid	G	G	U	G	U	—	E	G
Mercuric Chloride	E	E	E	E	U	U	U	U
Mercury	E	E	E	E	E	U	E	U
Methanol	G	G	E	U	G	G	E	C
Methyl Bromide	G	U	U	E	E	E	G	U
Methyl Chloride	U	U	U	E	E	E	E	U
Methyl Butyl Ketone	U	U	E	U	E	E	E	—
Methyl Ethyl Ketone	U	U	E	U	G	G	G	G
Methylene Chloride	U	U	U	G	G	G	G	G
Methyl Isobutyl Ketone	U	U	U	U	G	G	G	G
Methyl Isopropyl Ketone	U	U	U	U	G	G	G	G
Methyl Salicylate	U	U	C	U	E	G	G	E
MIL-L-2104	E	G	U	E	E	E	E	—
MIL-H-5606	E	G	U	E	E	E	E	E
MIL-H-6083	E	E	U	E	E	E	E	—
MIL-L-7808	G	U	U	E	G	G	E	—
MIL-L-23699	G	U	U	E	E	E	E	E
MIL-H-46170	E	G	U	E	E	E	E	—
MIL-H-83282	E	U	U	E	E	E	E	—
Mineral Oils	E	C	U	E	E	E	E	E
Naphtha	C	U	U	E	—	—	—	—
Naphthalene	U	U	U	E	E	G	E	G
Naphthenic Acid	C	U	U	E	—	G	E	G
Natural Gas	E	E	U	E	G	G	G	G
Nickel Acetate, 10% aq	C	C	E	G	G	C	E	G
Nickel Chloride, 10% aq	E	G	E	E	U	U	G	U
Nickel Sulfate, 10% aq	E	E	E	E	U	G	G	U
Nitric Acid, to 10%	U	U	U	E	U	U	E	U

Fluid	Seals		Metal					
	Buna-N	Neoprene	FPDM/EPDM	FKM	Steel	Brass	Stainless Steel	Aluminum
Nitric Acid, over 10%	U	U	U	G	U	U	E	C
Nitrobenzene	U	U	U	G	E	G	E	E
Nitrogen	E	E	E	E	E	E	E	E
Octyl Alcohol	E	E	E	E	E	E	E	E
Oleic Acid	U	U	C	G	C	E	G	C
Oleum, fuming sulfuric acid	U	U	U	E	E	E	E	E
Ortho-Dichlorobenzene	U	U	U	E	G	G	G	G
Oxalic Acid, 10% aq	G	G	E	E	U	C	C	C
Oxygen	—	—	E	E	G	G	G	G
Palmitic Acid	E	G	G	E	G	—	E	G
Para-Dichlorobenzene	U	U	U	E	G	G	G	G
Pentane	E	E	U	E	G	G	G	E
Perchloric Acid	E	G	G	E	U	U	U	U
Perchloroethylene	U	U	U	E	C	G	G	G
Petroleum Base Oils	E	G	U	E	E	E	E	E
Phenol (Carbolic Acid)	U	U	G	E	U	E	E	E
Phosphate Ester	U	U	G	C	E	E	E	E
Phosphoric Acid 20%	U	U	G	E	U	E	U	C
Phosphorous Trichloride	U	U	E	E	C	U	C	E
Potassium Acetate, 10% aq	G	G	E	U	C	G	C	U
Potassium Chloride, 10% aq	E	E	E	E	C	E	E	U
Potassium Cyanide, 10% aq	E	E	E	C	U	G	U	U
Potassium Dichromate, 10% aq	E	E	E	E	C	C	C	C
Potassium Hydroxide, to 10%	G	G	E	G	G	G	G	U
Potassium Hydroxide, over 10%	C	C	E	U	G	G	G	U
Potassium Nitrate, 10% aq	E	E	E	E	G	G	E	G
Potassium Sulfate, 10% aq	E	E	E	E	—	—	—	—
Propane (Liquified)	C	G	—	E	E	E	E	E
Propyl Acetate	U	U	G	U	E	—	E	E
Propyl Alcohol	E	E	E	E	E	E	E	E
Propylene	U	U	U	E	E	E	E	E
Rapeseed oil (B100)	G	C	U	E				
Refrigerant R-12	G	E	C	E	E	E	E	E
Refrigerant R-13	G	E	C	E	E	E	E	E
Refrigerant R-22	U	E	C	U	E	E	E	E
Refrigerant R-134a	E	C	G	U	E	E	E	E
Sewage	E	E	E	E	G	G	G	G
Silicone Oils	E	E	E	E	E	E	E	E
Soap (Water Solutions)	E	E	E	E	E	E	E	U
Sodium Acetate, 10% aq	G	G	E	U	E	E	G	E
Sodium Bicarbonate, 10% aq	E	E	E	G	G	G	E	G
Sodium Borate, 10% aq	E	E	E	E	E	E	E	G
Sodium Carbonate, 10% aq	E	E	E	E	E	G	E	U
Sodium Chloride, 10% aq	E	E	E	E	U	C	C	C
Sodium Cyanide, 10% aq	E	E	E	E	E	E	—	C
Sodium Hydroxide, to 10%	U	G	E	E	C	G	C	U
Sodium Hydroxide, over 10%	U	U	G	E	C	C	C	U
Sodium Hypochlorite, 10% aq	C	C	E	C	U	U	U	U
Sodium Metaphosphate, 10% aq	E	E	E	E	G	G	G	U
Sodium Nitrate, 10% aq	G	G	E	—	E	C	E	E
Sodium Perborate, 10% aq	G	G	E	E	C	U	C	U

Fluid Compatibility

E=Excellent
G=Good
C=Conditional
U=Unsatisfactory

Fluid	Seals		Metal					
	Buna-N	Neoprene	FPDM/EPDM	FKM	Steel	Brass	Stainless Steel	Aluminum
Sodium Peroxide, 10% aq	G	G	E	E	U	U	C	C
Sodium Phosphates, 10% aq	E	E	E	E	U	E	G	U
Sodium Silicate, 10% aq	E	E	E	E	E	E	E	E
Sodium Sulfate, 10% aq	E	E	E	E	C	G	G	G
Sodium Sulfide, 10% aq	E	E	E	E	C	U	C	U
Sodium Thiosulfate, 10% aq	G	E	E	E	U	U	C	G
Soy Bean Oil (B100)	E	C	U	E	E	E	E	E
Stannic Chloride	E	G	E	E	U	U	U	U
Steam (up to 388°F)	U	U	C	C	E	E	E	G
Stearic Acid	G	G	G	E	C	C	E	C
Stoddard Solvent	E	G	U	E	E	E	E	E
Styrene	U	U	U	G	E	E	E	E
Sulfur, Slurry	U	E	E	E	E	U	G	E
Sulfur Chloride, Wet	U	U	U	E	G	—	G	G
Sulfur Dioxide, Dry	U	U	G	E	E	G	G	E
Sulfur Trioxide	U	U	G	E	G	C	G	G
Sulfuric Acid, to 10%	U	G	U	E	U	G	C	—
Sulfuric Acid, over 10%	U	U	U	G	C	C	C	U
Sulfurous Acid	C	C	U	G	U	C	C	C
Tannic Acid	G	E	E	E	E	E	E	C
Tar (Bituminous)	G	U	U	E	E	G	E	E

Fluid	Seals		Metal					
	Buna-N	Neoprene	FPDM/EPDM	FKM	Steel	Brass	Stainless Steel	Aluminum
Tartaric Acid	E	G	G	E	U	C	C	E
Tertiary Butyl Alcohol	G	G	G	E	G	G	G	G
Titanium Tetrachloride	C	U	U	E	E	U	G	U
Toluene (Toluol)	U	U	U	E	E	E	E	E
Trichlorethylene	U	U	U	E	E	G	E	E
Tricresyl Phosphate	U	U	E	G	E	—	C	—
Triethanolamine	E	U	E	U	E	U	E	E
Tung Oil	G	G	U	E	E	G	E	E
Turpentine	G	U	U	E	G	G	G	G
Varnish	G	U	U	E	E	G	E	E
Vinyl Chloride	U	U	U	E	E	U	C	E
Water (to +150°F)	E	E	E	E	C	G	E	G
Water (+151°F to +200°F)	E	E	E	E	C	G	E	G
Water (+201°F to +350°F)	U	U	G	G	C	G	E	G
Water Glycol	E	E	E	E	E	E	E	G
Water Petroleum Emulsion	E	G	U	E	C	E	E	G
Xylene	U	U	U	E	E	E	E	E
Zinc Chloride, 10% aq	E	E	E	E	E	U	U	C
Zinc Sulfate, 10% aq	E	E	E	E	U	C	G	C

Seal Information for Eaton Hansen and Gromelle Products

Dash Number	Compound
***	Buna-N – 90 Durometer
-115	PTFE
-118	Neoprene
-143	FKM
-146	Buna-N – 70 Durometer
-192*	EPDM
-235†	Kalrez®
-236*	EPDM

***No Dash Number required for standard seal material.

*-192 and -236 compounds are not compatible with mineral-based greases or oils.

†Kalrez seals available by special quotation.

HK Series (Steel) ISO 7241-1 B Interchange



Product Features

- Meets dimensional requirements to ISO standard 7241-1 Series B
- The coupling that sets the industry standard
- Self-sealing poppet valve design provides excellent high and low pressure sealing
- Standard seal material: Buna-N
- Seal options available in PTFE, Neoprene, FKM, EPDM, and Kalrez®
- Standard body material: Zinc trivalent plated steel with stainless steel springs, balls and retaining rings.
- PTFE back up rings in sockets (females)

Physical Characteristics

Series	Body Size (in)	ISO Size (mm)	Nominal Flow Diameter (mm)	Max. Operating Pressure				Rated Flow*	Air Inclusion cc. max.	Fluid Loss cc. max.
				Non hazardous liquids & gases Group 2 (bar)	Non hazardous liquids & gases Group 1 (bar)	(psi)	(psi)			
1HK	1/8	5	4.4	275	4,000	275	4,000	3	0.8	0.6
2HK	1/4	6.3	5.9	345	5,000	345	5,000	12	3	1.2
3HK	3/8	10	7.8	275	4,000	275	4,000	23	6	2.9
4HK	1/2	12.5	10	345	5,000	345	5,000	45	12	3.6
6HK	3/4	20	17	275	4,000	275	4,000	100	26	11.5
8HK	1	25	19.6	275	4,000	275	4,000	189	50	18.0
10HK	1 1/4 **	—	26.7	200	2900	37	537	288	76	48.0
12HK	1 1/2	40	35.1	150	2175	29	421	375	99	91.3
20HK	2 1/2	50	46	100	1450	21	305	757	200	209.9

* For questions related to vacuum please contact Eaton.

** No ISO Standard available for the 10HK

Applications & Markets


- Agriculture
- Hydraulic Tool
- General Industry
- Construction
- Fluid Transfer
- Transportation
- Military
- Law Enforcement/Rescue
- Chemical
- Oil and Gas
- Consumer Products
- HVAC
- Food and Beverage
- Trucks
- Aerospace
- Medical

Eaton's HK Series coupling sets the industry standard for ISO B Couplings. The HK Series features a rugged ball latch mechanism with automatic self-sealing poppet valves in a wide array of port configurations and multiple valved and non-valved configurations.

European Pressure Equipment Directive

Couplings with nominal diameters up to and including 25 mm are designed and manufactured under Article 3.3 of the European Pressure Equipment Directive 97/23 EC. Couplings with nominal diameters greater than 25 mm are designed and manufactured in accordance with stipulations of Module A of the European Pressure Equipment Directive 97/23 EC. They should not be used to convey unstable gases.

Flow Data

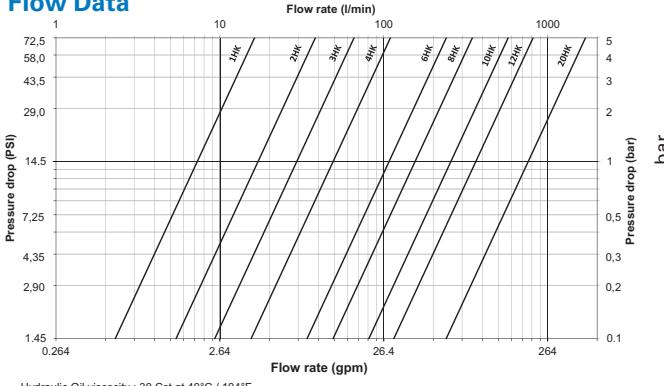

Seal Elastomer Data*

Seal Elastomer**	Max. Operation Temperature Range
Buna-N	-40°C to +121°C/40°F to +250°F
Neoprene	-54°C to +100°C/-65°F to +212°F
EPDM	-54°C to +149°C/-65°F to +300°F
FKM	-29°C to +204°C/-15°F to +400°F

* For reference only, based on Eaton recommended temperatures.

** For seals not listed contact Eaton.

Contact Eaton technical support for further information on fluid compatibility.

HK Series (Steel)

ISO 7241-1 B Interchange




Figure 1

Sockets (Female)

Part Number HK1-8 Series	Body Size	ISO Size	Thread Size (Female)	Fig.	Dimensions						
	(in)	(mm)	NPTF BSPP SAE		A (in) (mm)	B (in) (mm)	Across Flats (in) (mm)	A (in) (mm)	B (in) (mm)	Across Flats (in) (mm)	
1H11	1/8	5	1/8-27	-	1	1.91	0.98	0.56	48.5	24.9	14.2
1H4	1/8	5	-	-	1	2.06	0.98	0.69	52.3	24.9	17.5
2H16	1/4	6.3	1/4-18	-	1	2.26	1.14	0.75	57.4	29.0	19.1
2H16BS	1/4	6.3	-	1/4-19	-	2.31	1.14	0.75	58.7	29.0	19.1
2H6	1/4	6.3	-	-	1	2.40	1.14	0.88	61.0	29.0	22.4
3H21	3/8	10	3/8-18	-	-	2.56	1.42	0.88	65.0	36.1	22.4
3H21BS	3/8	10	-	3/8-19	-	2.56	1.42	0.88	65.0	36.1	22.4
3H8	3/8	10	-	-	1	2.74	1.42	1.00	69.6	36.1	25.4
4HP26	1/2	12.5	1/2-14	-	1	2.96	1.86	1.13	75.2	47.2	28.7
4HP26BS	1/2	12.5	-	1/2-14	-	2.96	1.86	1.13	75.2	47.2	28.7
4HP10	1/2	12.5	-	-	1	3.05	1.86	1.25	77.5	47.2	31.8
6HP31	3/4	20	3/4-14	-	-	3.48	2.22	1.31	88.4	56.4	33.3
6HP31BS	3/4	20	-	3/4-14	-	3.48	2.22	1.31	88.4	56.4	33.3
6HP12	3/4	20	-	-	1	3.67	2.22	1.38	93.2	56.4	35.1
8HP36	1	25	1-11 1/2	-	-	4.13	2.61	1.75	104.9	66.3	44.5
8HP36BS	1	25	-	1-11	-	4.13	2.61	1.75	104.9	66.3	44.5
8HP16	1	25	-	-	1	4.13	2.61	1.88	104.9	66.3	47.8

A=Overall Length, B=Maximum Diameter

To obtain connected length of coupling, add dimensions A (Fig. 1) and E (Fig. 3) together.




Figure 2

Sockets (Female)

Part Number HK10/12/20 Series	Body Size	ISO Size	Thread Size (Female)	Fig.	Dimensions						
	(in)	(mm)	NPTF BSPP		A (in) (mm)	B (in) (mm)	Hex (in) (mm)	A (in) (mm)	B (in) (mm)	Hex (in) (mm)	
10H41*	1 1/4	-	1 1/4-11 1/2	-	2	4.51	2.73	2.38	114.6	69.3	60.5
10H41BS*	1 1/4	-	-	1 1/4-11	2	4.51	2.73	2.38	114.6	69.3	60.5
12H41	1 1/2	40	1 1/4-11 1/2	-	2	4.82	3.23	2.38	122.4	82.0	60.5
12H41BS	1 1/2	40	-	1 1/4-11	2	4.82	3.23	2.38	122.4	82.0	60.5
12H46	1 1/2	40	1 1/2-11 1/2	-	2	4.82	3.23	2.38	122.4	82.0	60.5
12H46BS	1 1/2	40	-	1 1/2-11	2	4.82	3.23	2.38	122.4	82.0	60.5
20H51	2 1/2	50	2-11 1/2	-	2	5.55	4.11	3.75	141.0	104.4	95.3
20H51BS	2 1/2	50	-	2-11	2	5.55	4.11	3.75	141.0	104.4	95.3
20H56	2 1/2	50	2 1/2-8	-	2	6.14	4.11	3.75	156.0	104.4	95.3
20H56BS	2 1/2	50	-	2 1/2-11	2	6.14	4.11	3.75	156.0	104.4	95.3
20H61	2 1/2	50	3-8	-	2	7.00	4.11	4.00	177.8	104.4	101.6
20H61BS	2 1/2	50	-	3-11	2	7.00	4.11	4.00	177.8	104.4	101.6

A=Overall Length, B=Maximum Diameter

* ISO 7241-1 Series B does not include 1-1/4 inch body size couplings; therefore, Series 10HK is not covered by this standard

To obtain connected length of coupling, add dimensions A (Fig. 2) and E (Fig. 4) together.

HK Series (Steel)

ISO 7241-1 B Interchange




Figure 3

Plugs (Male)

Part Number HK1-8 Series	Body Size	ISO Size	Thread Size (Female)			Fig.	Dimensions								
			(in)	(mm)	NPTF	BSPP	SAE	C (in)	D (in)	E (in)	Hex (in)	C (mm)	D (mm)	E (mm)	
1K11	1/8	5	1/8-27	-	-	-	3	1.26	0.65	0.44	0.56	32.0	16.5	11.2	14.2
1K4	1/8	5	-	-	-	1/16-20	3	1.41	0.79	0.59	0.69	35.8	20.1	15.0	17.5
2K16	1/4	6.3	1/4-18	-	-	-	3	1.52	0.87	0.56	0.75	38.6	22.1	14.2	19.1
2K16BS	1/4	6.3	-	-	1/4-19	-	3	1.52	0.87	0.56	0.75	38.6	22.1	14.2	19.1
2K6	1/4	6.3	-	-	-	3/16-18	3	1.66	1.01	0.70	0.88	42.2	25.7	17.8	22.4
3K21	3/8	10	3/8-18	-	-	-	3	1.76	1.01	0.61	0.88	44.7	25.7	15.5	22.4
3K21BS	3/8	10	-	-	3/8-19	-	3	1.76	1.01	0.61	0.88	44.7	25.7	15.5	22.4
3K8	3/8	10	-	-	-	3/4-16	3	1.94	1.15	0.79	1.00	49.3	29.2	20.1	25.4
4KP26	1/2	12.5	1/2-14	-	-	-	3	2.03	1.30	0.76	1.13	51.6	33.0	19.3	28.7
4KP26BS	1/2	12.5	-	-	1/2-14	-	3	2.03	1.30	0.76	1.13	51.6	33.0	19.3	28.7
4KP10	1/2	12.5	-	-	-	7/16-14	3	2.11	1.37	0.84	1.19	53.6	34.8	21.3	30.2
6KP31	3/4	20	3/4-14	-	-	-	3	2.36	1.52	0.71	1.31	59.9	38.6	18.0	33.3
6KP31BS	3/4	20	-	-	3/4-14	-	3	2.36	1.52	0.71	1.31	59.9	38.6	18.0	33.3
6KP12	3/4	20	-	-	-	1 1/16-12	3	2.54	1.59	0.89	1.38	64.5	40.4	22.6	35.1
8KP36	1	25	1-11 1/2	-	-	-	3	2.85	1.88	0.97	1.63	72.4	47.8	24.6	41.4
8KP36BS	1	25	-	-	1-11	-	3	2.85	1.88	0.97	1.63	72.4	47.8	24.6	41.4
8KP16	1	25	-	-	-	1 1/16-12	3	2.85	2.17	0.97	1.88	72.4	55.1	24.6	47.8

C=Overall Length, D=Maximum Diameter, E=Exposed Length when Connected

To obtain connected length of coupling, add dimensions A (Fig. 1) and E (Fig. 3) together:




Figure 4

Plugs (Male)

Part Number HK10/12/20 Series	Body Size	ISO Size	Thread Size (Female)			Fig.	Dimensions						
			(in)	(mm)	NPTF	BSPP	SAE	C (in)	D (in)	E (in)	Hex (in)	C (mm)	D (mm)
10K41*	1 1/4	-	1 1/4-11 1/2	-	4	4.25	2.74	2.33	2.38	108.0	69.6	59.2	60.5
10K41BS*	1 1/4	-	-	1 1/4-11	4	4.25	2.74	2.33	2.38	108.0	69.6	59.2	60.5
12K41	1 1/2	40	1 1/4-11 1/2	-	4	4.76	2.74	2.67	2.38	120.9	69.6	67.8	60.5
12K41BS	1 1/2	40	-	1 1/4-11	4	4.76	2.74	2.67	2.38	120.9	69.6	67.8	60.5
12K46	1 1/2	40	1 1/2-11 1/2	-	4	4.76	2.74	2.67	2.38	120.9	69.6	67.8	60.5
12K46BS	1 1/2	40	-	1 1/2-11	4	4.76	2.74	2.67	2.38	120.9	69.6	67.8	60.5
20K51	2 1/2	60	2-11 1/2	-	4	5.49	4.33	2.97	3.75	139.4	110.0	75.4	95.3
20K51BS	2 1/2	60	-	2-11	4	5.49	4.33	2.97	3.75	139.4	110.0	75.4	95.3
20K56	2 1/2	60	2 1/2-8	-	4	6.08	4.33	3.56	3.75	154.4	110.0	90.4	95.3
20K56BS	2 1/2	60	-	2 1/2-11	4	6.08	4.33	3.56	3.75	154.4	110.0	90.4	95.3
20K61	2 1/2	60	3-8	-	4	6.94	4.62	4.42	4.00	176.3	117.3	112.3	101.6
20K61BS	2 1/2	60	-	3-11	4	6.94	4.62	4.42	4.00	176.3	117.3	112.3	101.6

C=Overall Length, D=Maximum Diameter, E=Exposed Length when Connected

* ISO 7241-1 Series B does not include 1-1/4 inch body size couplings; therefore, Series 10HK is not covered by this standard

To obtain connected length of coupling, add dimensions A (Fig. 2) and E (Fig. 4) together:



Vinyl Dust Plug



Vinyl Dust Cap



Metal Dust Cap



Metal Dust Plug

Dust Plugs and Dust Caps Accessories

Coupling Series	Plug	Dust Cap	Part No.	Socket	Dust Plug	Part No.
Metal	Vinyl	Metal	Vinyl	Metal	Vinyl	
1HK	PDC1HK*	PPDC1HK	SDC1HK*	PSDC1HK		
2HK	PDC2HK*	PPDC2HK	SDC2HK*	PSDC2HK		
3HK	PDC3HK*	PPDC3HK	SDC3HK*	PSDC3HK		
4HK	PDC4HK**	PPDC4HK(RD)***	SDC4HK**	PSDC4HK(RD)***		
6HK	PDC6HK**	PPDC6HK(RD)***	SDC6HK**	PSDC6HK(RD)***		
8HK	PDC8HK**	PPDC8HK(RD)***	SDC8HK**	PSDC8HK(RD)***		
12HK	PDC12HK*		SDC12HK*			
20HK	PDC20HK*		SDC20HK*			

*Brass **Aluminum ***Offered in red by adding RD to end of part number

HK Series (Brass)

ISO 7241-1 B Interchange



Product Features

- Meets dimensional requirements to ISO standard 7241-1 Series B
- Brass construction with stainless steel springs for greater corrosion resistance and fluid compatibility
- Self-sealing poppet valves provide excellent high and low pressure sealing
- Standard seal material: Buna-N
- Seal options available in PTFE, Neoprene, FKM, EPDM, and Kalrez®

Physical Characteristics

Series	Body Size	ISO Size	Nominal Flow Diameter	Max. Operating Pressure				Rated Flow*	Air Inclusion	Fluid Loss
				Non hazardous liquids & gases Group 2	Non hazardous liquids & gases Group 1	(bar)	(psi)			
1HK	1/8	5	4.4	207	3,000	207	3,000	3	0.8	0.6
2HK	1/4	6.3	5.9	186	2,700	186	2,700	12	3	1.2
3HK	3/8	10	7.8	152	2,200	152	2,200	23	6	2.9
4HK	1/2	12.5	10	155	2,250	155	2,250	45	12	3.6
6HK	3/4	20	17	138	2,000	138	2,000	100	26	11.5
8HK	1	25	19.6	103	1,500	103	1,500	189	50	18.0
10HK	1 1/4**	—	26.7	83	1,200	37	537	288	76	48.0
12HK	1 1/2	40	35.1	104	1,500	29	421	375	99	91.3
20HK	2 1/2	50	46	49	700	21	305	757	200	209.9
* For questions related to vacuum please contact Eaton.										
** No ISO Standard available for the 10HK										

* For questions related to vacuum please contact Eaton.

** No ISO Standard available for the 10HK

Applications & Markets


- Agriculture
- Hydraulic Tool
- General Industry
- Construction
- Fluid Transfer
- Chemical
- Oil and Gas
- Transportation
- Food and Beverage
- Trucks
- Nuclear

Eaton's HK brass is a general purpose industrial interchange coupling available in valved or non-valved designs, offered in brass for excellent corrosion resistance in rugged applications where stainless steel is unacceptable. The HK Series features a ball latch mechanism with automatic self-sealing poppet valves.

European Pressure Equipment Directive

Couplings with nominal diameters up to and including 25 mm are designed and manufactured under Article 3.3 of the European Pressure Equipment Directive 97/23 EC. Couplings with nominal diameters greater than 25 mm are designed and manufactured in accordance with stipulations of Module A of the European Pressure Equipment Directive 97/23 EC. They should not be used to convey unstable gases.

Flow Data

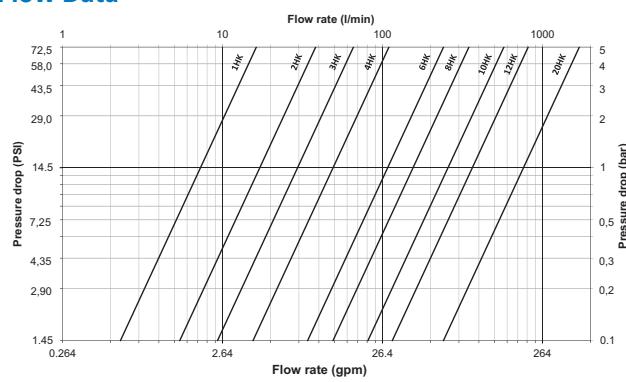

Seal Elastomer Data*

Seal Elastomer	Application Specification	Max. Operation Temperature Range
Buna-N	none	-40°C to +121°C/40°F to +250°F
Neoprene	none	-54°C to +100°C/-65°F to +212°F
EPDM	none	-54°C to +149°C/65°C to +300°F
FKM	MIL-R-25897	-29°C to +204°C/-15°F to +400°F

* For reference only, based on Eaton recommended temperatures. Contact Eaton technical support for further information on fluid compatibility.

HK Series (Brass)

ISO 7241-1 B Interchange




Figure 1

Sockets (Female)

Part Number HK1-8 Series	Body Size	ISO Size	Thread Size (Female)	Fig.	Dimensions						
					(in)	(mm)	NPTF	BSPP	A (in)	B (in)	Across Flats (in)
B1H11	1/8	5	1/8-27	-	1	1.91	0.98	0.56	48.5	24.9	14.2
B2H16	1/4	6.3	1/4-18	-	1	2.26	1.14	0.75	57.4	29.0	19.1
B2H16BS	1/4	6.3	-	1/4-19	1	2.31	1.14	0.75	58.7	29.0	19.1
B3H21	3/8	10	3/8-18	-	1	2.56	1.42	0.88	65.0	36.1	22.4
B3H21BS	3/8	10	-	3/8-19	1	2.56	1.42	0.88	65.0	36.1	22.4
B4HP26	1/2	12.5	1/2-14	-	1	2.96	1.86	1.13	75.2	47.2	28.7
B4HP26BS	1/2	12.5	-	1/2-14	1	2.96	1.86	1.13	75.2	47.2	28.7
B6HP31	3/4	20	3/4-14	-	1	3.48	2.22	1.31	88.4	56.4	33.3
B6HP31BS	3/4	20	-	3/4-14	1	3.48	2.22	1.31	88.4	56.4	33.3
B8HP36	1	25	1-11 1/2	-	1	4.13	2.61	1.75	104.9	66.3	44.5
B8HP36BS	1	25	-	1-11	1	4.13	2.61	1.75	104.9	66.3	44.5

A=Overall Length, B=Maximum Diameter

To obtain connected length of coupling, add dimensions A (Fig. 1) and E (Fig. 3) together.




Figure 2

Sockets (Female)

Part Number HK10/12/20 Series	Body Size	ISO Size	Thread Size (Female)	Fig.	Dimensions						
					(in)	(mm)	NPTF	BSPP	A (in)	B (in)	Hex (in)
B10H41*	1 1/4	-	1 1/4-11 1/2	-	2	4.51	2.73	2.38	114.6	69.3	60.5
B12H41	1 1/2	40	1 1/4-11 1/2	-	2	4.82	3.23	2.38	122.4	82.0	60.5
B12H41BS	1 1/2	40	-	1 1/4-11	2	4.82	3.23	2.38	122.4	82.0	60.5
B12H46	1 1/2	40	1 1/2-11	-	2	4.82	3.23	2.38	122.4	82.0	60.5
B12H46BS	1 1/2	40	-	1 1/2-11	2	4.82	3.23	2.38	122.4	82.0	60.5
B20H51	2 1/2	50	2-11 1/2	-	2	5.55	4.11	3.75	141.0	104.4	95.3
B20H51BS	2 1/2	50	-	2-11	2	5.55	4.11	3.75	141.0	104.4	95.3
B20H56	2 1/2	50	2 1/2-8	-	2	6.14	4.11	3.75	156.0	104.4	95.3
B20H56BS	2 1/2	50	-	2 1/2-11	2	6.14	4.11	3.75	156.0	104.4	95.3
B20H61	2 1/2	50	3-8	-	2	7.00	4.11	4.00	177.8	104.4	101.6
B20H61BS	2 1/2	50	-	3-11	2	7.00	4.11	4.00	177.8	104.4	101.6

A=Overall Length, B=Maximum Diameter

* ISO 7241-1 Series B does not include 1-1/4 inch body size couplings; therefore, Series 10HK is not covered by this standard

To obtain connected length of coupling, add dimensions A (Fig. 2) and E (Fig. 4) together.



HK Series (Brass) ISO 7241-1 B Interchange




Figure 3

Plugs (Male)

Part Number HK1-8 Series	Body Size	ISO Size	Thread Size (Female)		Fig.	Dimensions								
			(in)	(mm)		NPTF	BSPP	C (in)	D (in)	E (in)	Hex (in)	C (mm)	D (mm)	E (mm)
B1K11	1/8	5	1/8-27	-	3	1.26	0.65	0.44	0.56	32.0	16.5	11.2	14.2	
B2K16	1/4	6.3	1/4-18	-	3	1.52	0.87	0.56	0.75	38.6	22.1	14.2	19.1	
B2K16BS	1/4	6.3	-	1/4-19	3	1.52	0.87	0.56	0.75	38.6	22.1	14.2	19.1	
B3K21	3/8	10	3/8-18	-	3	1.76	1.01	0.61	0.88	44.7	25.7	15.5	22.4	
B3K21BS	3/8	10	-	3/8-19	3	1.76	1.01	0.61	0.88	44.7	25.7	15.5	22.4	
B4KP26	1/2	12.5	1/2-14	-	3	2.03	1.30	0.76	1.13	51.6	33.0	19.3	28.7	
B4KP26BS	1/2	12.5	-	1/2-14	3	2.03	1.30	0.76	1.13	51.6	33.0	19.3	28.7	
B6KP31	3/4	20	3/4-14	-	3	2.36	1.52	0.71	1.31	59.9	38.6	18.0	33.3	
B6KP31BS	3/4	20	-	3/4-14	3	2.36	1.52	0.71	1.31	59.9	38.6	18.0	33.3	
B8KP36	1	25	1-11 1/2	-	3	2.85	1.88	0.97	1.63	72.4	47.8	24.6	41.4	
B8KP36BS	1	25	-	1-11	3	2.85	1.88	0.97	1.63	72.4	47.8	24.6	41.4	

C=Overall Length, D=Maximum Diameter, E=Exposed Length when Connected

To obtain connected length of coupling, add dimensions A (Fig. 1) and E (Fig. 3) together.




Figure 4

Plugs (Male)

Part Number HK10/12/20 Series	Body Size	ISO Size	Thread Size (Female)		Fig.	Dimensions								
			(in)	(mm)		NPTF	BSPP	C (in)	D (in)	E (in)	Hex (in)	C (mm)	D (mm)	E (mm)
B10K41*	1 1/4	-	1 1/4-11 1/2	-	4	4.25	2.74	2.33	2.38	108.0	69.6	59.2	60.5	
B12K41	1 1/2	40	1 1/4-11 1/2	-	4	4.76	2.74	2.67	2.38	120.9	69.6	67.8	60.5	
B12K41BS	1 1/2	40	-	1 1/4-11	4	4.76	2.74	2.67	2.38	120.9	69.6	67.8	60.5	
B12K46	1 1/2	40	1 1/2-11 1/2	-	4	4.76	2.74	2.67	2.38	120.9	69.6	67.8	60.5	
B12K46BS	1 1/2	40	-	1 1/2-11	4	4.76	2.74	2.67	2.38	120.9	69.6	67.8	60.5	
B20K51	2 1/2	50	2-11 1/2	-	4	5.49	4.33	2.97	3.75	139.4	110.0	75.4	95.3	
B20K51BS	2 1/2	50	-	2-11	4	5.49	4.33	2.97	3.75	139.4	110.0	75.4	95.3	
B20K56	2 1/2	50	2 1/2-8	-	4	6.08	4.33	3.56	3.75	154.4	110.0	90.4	95.3	
B20K56BS	2 1/2	50	-	2 1/2-11	4	6.08	4.33	3.56	3.75	154.4	110.0	90.4	95.3	
B20K61	2 1/2	50	3-8	-	4	6.94	4.62	4.42	4.00	176.3	117.3	112.3	101.6	
B20K61BS	2 1/2	50	-	3-11	4	6.94	4.62	4.42	4.00	176.3	117.3	112.3	101.6	

C=Overall Length, D=Maximum Diameter, E=Exposed Length when Connected

* ISO 7241-1 Series B does not include 1-1/4 inch body size couplings; therefore, Series 10HK is not covered by this standard

To obtain connected length of coupling, add dimensions A (Fig. 2) and E (Fig. 4) together.

Dust Plugs and Dust Caps Accessories

Coupling Series	Plug Dust Cap Part No.	Socket Dust Plug Part No.		
Metal	Vinyl	Metal	Vinyl	
1HK	PDC1HK*	PPDC1HK	SDC1HK*	PSDC1HK
2HK	PDC2HK*	PPDC2HK	SDC2HK*	PSDC2HK
3HK	PDC3HK*	PPDC3HK	SDC3HK*	PSDC3HK
4HK	PDC4HK**	PPDC4HK(RD)***	SDC4HK**	PSDC4HK(RD)***
6HK	PDC6HK**	PPDC6HK(RD)***	SDC6HK**	PSDC6HK(RD)***
8HK	PDC8HK**	PPDC8HK(RD)***	SDC8HK**	PSDC8HK(RD)***
12HK	PDC12HK*		SDC12HK*	
20HK	PDC20HK*		SDC20HK*	

*Brass **Aluminum ***Offered in red by adding RD to end of part number



HK Series Series (Stainless Steel) ISO 7241-1 B Interchange



Product Features

- Meets dimensional requirements to ISO standard 7241-1 Series B
- 303/316 Stainless steel construction for greater corrosion resistance and fluid compatibility
- Self-sealing poppet valves provide excellent high and low pressure sealing
- Standard body material: 303 or 316 Stainless Steel
- Standard seal material: Buna-N
- Seal options available in PTFE, Neoprene, FKM, EPDM, and Kalrez®

Physical Characteristics

Series	Body Size	ISO Size	Nominal Flow Diameter	Max. Operating Pressure				Rated Flow*	Air Inclusion	Fluid Loss	
				Non hazardous liquids & gases Group 2		Non hazardous liquids & gases Group 1					
				(bar)	(psi)	(bar)	(psi)	(lpm)	(gpm)	cc. max.	cc. max.
1HK	1/8	5	4.4	344	5,000	344	5,000	3	0.8	0.6	0.5
2HK	1/4	6.3	5.9	255	3,700	255	3,700	12	3	1.2	0.9
3HK	3/8	10	7.8	255	3,700	255	3,700	23	6	2.9	2.1
4HK	1/2	12.5	10	293	4,250	293	4,250	45	12	3.6	3.5
6HK	3/4	20	17	242	3,500	242	3,500	100	26	11.5	9.3
8HK	1	25	19.6	207	3,000	207	3,000	189	50	18.0	16.9
10HK	1 1/4**	—	26.7	118	1,700	37	537	288	76	48.0	48.0
12HK	1 1/2	40	35.1	152	2,200	29	421	375	99	91.3	91.3
20HK	2 1/2	50	46	104	1,500	21	305	757	200	209.9	209.9

* For questions related to vacuum please contact Eaton.

** No ISO Standard available for the 10HK

Applications & Markets


- Agriculture
- Hydraulic Tool
- General Industry
- Construction
- Fluid Transfer
- Transportation
- Military
- Law Enforcement/Rescue
- Chemical
- Oil and Gas
- Consumer Products
- HVAC
- Food and Beverage
- Trucks
- Aerospace
- Medical

Eaton's HK stainless steel is a general purpose industrial interchange coupling available in valved or non-valved designs, offered in 303/316 grades of stainless steel for excellent corrosion resistance in rugged applications. The HK Series features a ball latch mechanism with automatic self-sealing poppet valves.

European Pressure Equipment Directive

Couplings with nominal diameters up to and including 25 mm are designed and manufactured under Article 3.3 of the European Pressure Equipment Directive 97/23 EC. Couplings with nominal diameters greater than 25 mm are designed and manufactured in accordance with stipulations of Module A of the European Pressure Equipment Directive 97/23 EC. They should not be used to convey unstable gases.

Flow Data

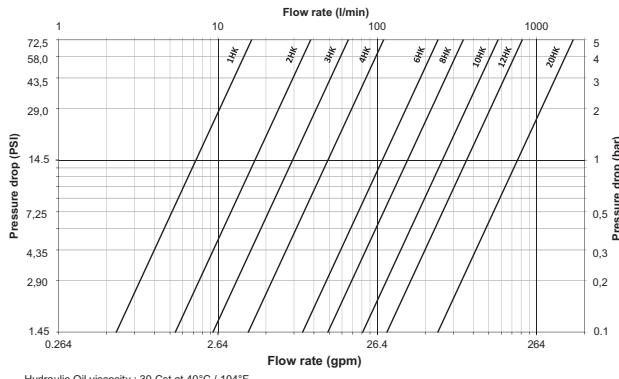

Seal Elastomer Data*

Seal Elastomer	Application Specification	Max. Operation Temperature Range
Buna-N	none	-40°C to +121°C/40°F to +250°F
Neoprene	none	-54°C to +100°C/-65°F to +212°F
EPDM	none	-54°C to +149°C/-65°C to +300°F
FKM	MIL-R-25897	-29°C to +204°C/-15°F to +400°F

*For reference only, based on Eaton recommended temperatures.

Contact Eaton technical support for further information on fluid compatibility.

HK Series Series (Stainless Steel)

ISO 7241-1 B Interchange




Figure 1

Sockets (Female)

Part Number HK1-8 Series 303 Stainless Steel	316 Stainless Steel	Body Size	ISO Size	Thread Size (Female)	Fig.	Dimensions							
		(in)	(in)	NPTF BSPP SAE	A (in)	B (in)	Across Flats (in)	A (mm)	B (mm)	Across Flats (mm)			
LL1H11	ML1H11	1/8	5	1/8-27	-	-	1	1.91	0.98	0.56	48.5	24.9	14.2
LL1H4	-	1/8	5	-	-	7/16-20	1	2.06	0.98	0.69	52.3	24.9	17.5
LL2H16	ML2H16	1/4	6.3	1/4-18	-	-	1	2.26	1.14	0.75	57.4	29.0	19.1
LL2H16BS	ML2H16BS	1/4	6.3	-	1/4-19	-	1	2.31	1.14	0.75	58.7	29.0	19.1
LL2H6	-	1/4	6.3	-	-	9/16-18	1	2.40	1.14	0.88	61.0	29.0	22.4
LL3H21	ML3H21	3/8	10	3/8-18	-	-	1	2.56	1.42	0.88	65.0	36.1	22.4
LL3H21BS	ML3H21BS	3/8	10	-	3/8-19	-	1	2.56	1.42	0.88	65.0	36.1	22.4
LL3H8	-	3/8	10	-	-	3/4-16	1	2.74	1.42	1.00	69.6	36.1	25.4
LL4HP26	ML4HP26	1/2	12.5	1/2-14	-	-	1	2.96	1.86	1.13	75.2	47.2	28.7
LL4HP26BS	ML4HP26BS	1/2	12.5	-	1/2-14	-	1	2.96	1.86	1.13	75.2	47.2	28.7
LL4HP10	-	1/2	12.5	-	-	7/8-14	1	3.05	1.86	1.25	77.5	47.2	31.8
LL6HP31	ML6HP31	3/4	20	3/4-14	-	-	1	3.48	2.22	1.31	88.4	56.4	33.3
LL6HP31BS	ML6HP31BS	3/4	20	-	3/4-14	-	1	3.48	2.22	1.31	88.4	56.4	33.3
LL6HP12	-	3/4	20	-	-	1 1/8-12	1	3.67	2.22	1.38	93.2	56.4	35.1
LL8HP36	ML8HP36	1	25	1-11 1/2	-	-	1	4.13	2.61	1.75	104.9	66.3	44.5
LL8HP36BS	ML8HP36BS	1	25	-	1-11	-	1	4.13	2.61	1.75	104.9	66.3	44.5
LL8HP16	-	1	25	-	-	1 15/16-12	1	4.13	2.61	1.88	104.9	66.3	47.8

A=Overall Length, B=Maximum Diameter

To obtain connected length of coupling, add dimensions A (Fig. 1) and E (Fig. 3) together.




Figure 2

Sockets (Female)

Part Number HK10/12/20 Series 303 Stainless Steel	Body Size	ISO Size	Thread Size (Female)	Fig.	Dimensions						
	(in)	(mm)	NPTF BSPP	A (in)	B (in)	Hex (in)	A (mm)	B (mm)	Hex (mm)		
LL10H41*	1 1/4	-	1 1/4-11 1/2	-	2	4.51	2.73	2.38	114.6	69.3	60.5
LL10H41BS*	1 1/4	-	-	1 1/4-11	2	4.51	2.73	2.38	114.6	69.3	60.5
LL12H41	1 1/2	40	1 1/4-11 1/2	-	2	4.82	3.23	2.38	122.4	82.0	60.5
LL12H41BS	1 1/2	40	-	1 1/4-11	2	4.82	3.23	2.38	122.4	82.0	60.5
LL12H46	1 1/2	40	1 1/2-11 1/2	-	2	4.82	3.23	2.38	122.4	82.0	60.5
LL12H46BS	1 1/2	40	-	1 1/2-11	2	4.82	3.23	2.38	122.4	82.0	60.5
LL20H51	2 1/2	50	2-11 1/2	-	2	5.55	4.11	3.75	141.0	104.4	95.3
LL20H51BS	2 1/2	50	-	2-11	2	5.55	4.11	3.75	141.0	104.4	95.3
LL20H56	2 1/2	50	2 1/2-8	-	2	6.14	4.11	3.75	156.0	104.4	95.3
LL20H56BS	2 1/2	50	-	2 1/2-11	2	6.14	4.11	3.75	156.0	104.4	95.3
LL20H61	2 1/2	50	3-8	-	2	7.00	4.11	4.00	177.8	104.4	101.6
LL20H61BS	2 1/2	50	-	3-11	2	7.00	4.11	4.00	177.8	104.4	101.6

A=Overall Length, B=Maximum Diameter

* ISO 7241-1 Series B does not include 1-1/4 inch body size couplings; therefore, Series 10HK is not covered by this standard.

To obtain connected length of coupling, add dimensions A (Fig. 2) and E (Fig. 4) together.

HK Series (Stainless Steel) ISO 7241-1 B Interchange

Plugs (Male)

Part Number HK1-8 Series 303	Body Size 316	ISO Size	Thread Size (Female)	Fig.	Dimensions	C (in)	D (in)	E (in)	Hex (in)	C (mm)	D (mm)	E (mm)	Hex (mm)		
		(in)	(mm)	NPTF	BSPP	SAE									
LL1K11	ML1K11	1/8	5	1/8-27	-	-	3	1.26	0.65	0.44	0.56	32.0	16.5	11.2	14.2
LL1K4	-	1/8	5	-	-	7/16-20	3	1.41	0.79	0.59	0.69	35.8	20.1	15.0	17.5
LL2K16	ML2K16C	1/4	6.3	1/4-18	-	-	3	1.52	0.87	0.56	0.75	38.6	22.1	14.2	19.1
LL2K16BS	ML2K16BS	1/4	6.3	-	1/4-19	-	3	1.52	0.87	0.56	0.75	38.6	22.1	14.2	19.1
LL2K6	-	1/4	6.3	-	-	7/16-18	3	1.66	1.01	0.70	0.88	42.2	25.7	17.8	22.4
LL3K21	ML3K21C	3/8	10	3/8-18	-	-	3	1.76	1.01	0.61	0.88	44.7	25.7	15.5	22.4
LL3K21BS	ML3K21BS	3/8	10	-	3/8-19	-	3	1.76	1.01	0.61	0.88	44.7	25.7	15.5	22.4
LL3K8	-	3/8	10	-	-	3/4-16	3	1.94	1.15	0.79	1.00	49.3	29.2	20.1	25.4
LL4KP26	ML4KP26	1/2	12.5	1/2-14	-	-	3	2.03	1.30	0.76	1.13	51.6	33.0	19.3	28.7
LL4KP26BS	ML4KP26BS	1/2	12.5	-	1/2-14	-	3	2.03	1.30	0.76	1.13	51.6	33.0	19.3	28.7
LL4KP10	-	1/2	12.5	-	-	7/8-14	3	2.11	1.37	0.84	1.19	53.6	34.8	21.3	30.2
LL6KP31	ML6KP31	3/4	20	3/4-14	-	-	3	2.36	1.52	0.71	1.31	59.9	38.6	18.0	33.3
LL6KP31BS	ML6KP31BS	3/4	20	-	3/4-14	-	3	2.36	1.52	0.71	1.31	59.9	38.6	18.0	33.3
LL6KP12	-	3/4	20	-	-	1 1/16-12	3	2.54	1.59	0.89	1.38	64.5	40.4	22.6	35.1
LL8KP36	ML8KP36	1	25	1-11 1/2	-	-	3	2.85	1.88	0.97	1.63	72.4	47.8	24.6	41.4
LL8KP36BS	ML8KP36BS	1	25	-	1-11	-	3	2.85	1.88	0.97	1.63	72.4	47.8	24.6	41.4
LL8KP16	-	1	25	-	-	1 5/16-12	3	2.85	2.17	0.97	1.88	72.4	55.1	24.6	47.8

C=Overall Length, D=Maximum Diameter, E=Exposed Length when Connected

To obtain connected length of coupling, add dimensions A (Fig. 1) and E (Fig. 3) together.




Figure 3

Plugs (Male)

Part Number HK10/12/20 Series 303 Stainless Steel	Body Size	ISO Size	Thread Size (Female)	Fig.	Dimensions	C (in)	D (in)	E (in)	Hex (in)	C (mm)	D (mm)	E (mm)	Hex (mm)
		(in)	(mm)	NPTF	BSPP								
LL10K41*	1 1/4	-	1 1/4-11 1/2	-	4	4.25	2.74	2.33	2.38	108.0	69.6	59.2	60.5
LL10K41BS*	1 1/4	-	-	1 1/4-11	4	4.25	2.74	2.33	2.38	108.0	69.6	59.2	60.5
LL12K41	1 1/2	40	1 1/4-11 1/2	-	4	4.76	2.74	2.67	2.38	120.9	69.6	67.8	60.5
LL12K41BS	1 1/2	40	-	1 1/4-11	4	4.76	2.74	2.67	2.38	120.9	69.6	67.8	60.5
LL12K46	1 1/2	40	1 1/2-11 1/2	-	4	4.76	2.74	2.67	2.38	120.9	69.6	67.8	60.5
LL12K46BS	1 1/2	40	-	1 1/2-11	4	4.76	2.74	2.67	2.38	120.9	69.6	67.8	60.5
LL20K51	2 1/2	50	2-11 1/2	-	4	5.49	4.33	2.97	3.75	139.4	110.0	75.4	95.3
LL20K51BS	2 1/2	50	-	2-11	4	5.49	4.33	2.97	3.75	139.4	110.0	75.4	95.3
LL20K56	2 1/2	50	2 1/2-8	-	4	6.08	4.33	3.56	3.75	154.4	110.0	90.4	95.3
LL20K56BS	2 1/2	50	-	2 1/2-11	4	6.08	4.33	3.56	3.75	154.4	110.0	90.4	95.3
LL20K61	2 1/2	50	3-8	-	4	6.94	4.62	4.42	4.00	176.3	117.3	112.3	101.6
LL20K61BS	2 1/2	50	-	3-11	4	6.94	4.62	4.42	4.00	176.3	117.3	112.3	101.6




Figure 4

C=Overall Length, D=Maximum Diameter, E=Exposed Length when Connected

* ISO 7241-1 Series B does not include 1-1/4 inch body size couplings; therefore, Series 10HK is not covered by this standard.

To obtain connected length of coupling, add dimensions A (Fig. 2) and E (Fig. 4) together.

Dust Plugs and Dust Caps Accessories

Coupling Series	Plug Dust Cap Part No.	Socket Dust Plug Part No.		
Metal	Vinyl	Metal	Vinyl	
1HK	PDC1HK*	PPDC1HK	SDC1HK*	PSDC1HK
2HK	PDC2HK*	PPDC2HK	SDC2HK*	PSDC2HK
3HK	PDC3HK*	PPDC3HK	SDC3HK*	PSDC3HK
4HK	PDC4HK**	PPDC4HK(RD)**	SDC4HK**	PSDC4HK(RD)**
6HK	PDC6HK**	PPDC6HK(RD)**	SDC6HK**	PSDC6HK(RD)**
8HK	PDC8HK**	PPDC8HK(RD)**	SDC8HK**	PSDC8HK(RD)**
12HK	PDC12HK*	PPDC12HK	SDC12HK*	PSDC12HK
20HK	PDC20HK*	PPDC20HK	SDC20HK*	PSDC20HK

*Brass **Aluminum ***Offered in red by adding RD to end of part number



H15000 Series

ISO 7241-1 A Interchange



The H15000 Series is a general purpose industrial interchange coupling that meets the ISO 7241-1 Series A standard. The H15000 Series features a rugged ball latch mechanism with self-sealing poppet valves.

Product Features

- Meets the requirements of ISO 7241-1 Series A
- Designed and manufactured under Article 3.3 of the European Pressure Equipment Directive 97/23 EC
- 1/2" size available in push-pull version (double acting sleeve, bulkhead-mounted)
- Double shut off valves with ball locking
- Standard body material: Zinc trivalent plated steel
- Standard seal material: NBR

Physical Characteristics

ISO Size	Coupling Size	Nominal Flow Diameter	Max. Operating Pressure	Rated Flow**		Fluid Loss	
	(in)	(mm)	(bar)	(psi)	(lpm)	(gpm)	ml max
6.3	1/4	5.3	315	4,565	10	2.6	0.35
10	3/8	7.3	315	4,565	20	5.3	1.5
12.5	1/2	10.2	250	3,625	40	10.6	2.6
20	3/4	13	250	3,625	75	19.8	8.5
25	1	16.9	200	2,900	140	37	13


*The ISO size corresponds to the internal diameter of the hose or the external diameter of the rigid tube (as defined in ISO 4397 Standard).

**Indicated values refer to a 1 bar/14.5 psi pressure drop.

Applications & Markets

- Hydraulic Circuits and Equipment
- Hydraulic fluids
- Agriculture

Flow Data

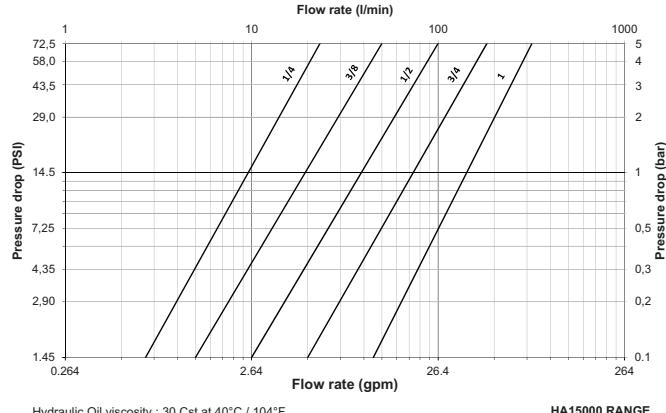

H15000 Series

ISO 7241-1 A Interchange

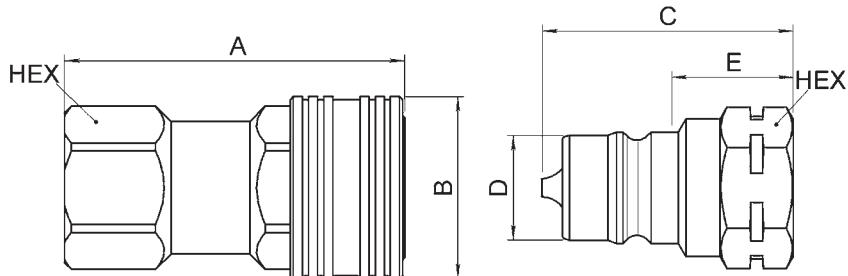


Figure 1

Figure 2

Part Number	Nominal Flow Diameter	ISO	Size	Coupling Type	Thread Size	Fig.	Dimensions				
	(mm)						(mm)	(mm)	Hex (mm)	Weight (g)	
HA1501100	5.3	6.3	1/4	Socket/Female	G 1/4	1	48	25	19	94	
HA1521100	5.3	6.3	1/4	Socket/Female	1/4 NPT	1	48	25	19	94	
HA1502100	7.3	10	3/8	Socket/Female	G 3/8	1	56	30	23	139	
HA1522100	7.3	10	3/8	Socket/Female	3/8 NPT	1	56	30	23	139	
HA1503100	10.2	12.5	1/2	Socket/Female	G 1/2	1	67	38	27	238	
HA1503600	10.2	12.5	1/2	Socket/Female	G 1/2 push-pull	1	67	38	27	238	
HA1523100	10.2	12.5	1/2	Socket/Female	1/2 NPT	1	67	38	27	238	
HA1504100	13	20	3/4	Socket/Female	G 3/4	1	83	48	35	484	
HA1524100	13	20	3/4	Socket/Female	3/4 NPT	1	83	48	35	484	
HA1505100	16.9	25	1	Socket/Female	G 1	1	98	53	41	670	
HA1525100	16.9	25	1	Socket/Female	1 NPT	1	98	53	41	670	
Part Number	Nominal Flow Diameter	ISO	Size	Coupling Type	Thread Size	Fig.	Dimensions				
	(mm)						(mm)	(mm)	Hex (mm)	Weight (g)	
HA1501200	5.3	6.3	1/4	Plug/Male	G 1/4	2	36	11.8	20	19	36
HA1521200	5.3	6.3	1/4	Plug/Male	1/4 NPT	2	36	11.8	20	19	36
HA1502200	7.3	10	3/8	Plug/Male	G 3/8	2	41.5	17.3	20	23	62
HA1522200	7.3	10	3/8	Plug/Male	3/8 NPT	2	41.5	17.3	20	23	62
HA1503200	10.2	12.5	1/2	Plug/Male	G 1/2	2	49	20.5	24	27	88
HA1523200	10.2	12.5	1/2	Plug/Male	1/2 NPT	2	49	20.5	24	27	88
HA1504200	13	20	3/4	Plug/Male	G 3/4	2	61.5	29.1	23	35	194
HA1524200	13	20	3/4	Plug/Male	3/4 NPT	2	61.5	29.1	27	35	194
HA1505200	16.9	25	1	Plug/Male	G 1	2	71.5	34.3	30	41	306
HA1525200	16.9	25	1	Plug/Male	1 NPT	2	71.5	34.3	30	41	306

To obtain connected length of coupling, add dimensions A (Fig. 1) and E (Fig. 2) together.

Dust Caps and Dust Plugs

Series	Dust Plug	Dust Cap
6.3	HP151100	HP1511200
10	HP1512100	HP1512200
12.5	HP1513100	HP1513200
20	HP1514100	HP1514200
25	HP1515100	HP1515200



5600 Series (Stainless Steel) ISO 7241-1 A Interchange



Product Features

- Self-sealing poppet valve provides excellent high and low pressure sealing
- Stainless steel construction offers excellent corrosion resistance in tough environments
- Standard body material: 303 stainless steel
- Standard body material: Buna-N. EPDM and FKM seals are available upon request.
- Available sizes include: 5/8", 3/4", 1"
- Female NPTF thread ends

*Additional sizes are available upon request.

The Eaton 5600 Series is a rugged poppet style ball locking quick disconnect coupling. As the original manufacturer of the ISO 7241-1 A style coupling, Eaton has reinvented this quick disconnect coupling series to meet your application needs by offering a new stainless steel construction.


Physical Characteristics

Body Size (in)	Max. Operating Pressure Connected (bar)	Max. Operating Pressure Connected (psi)	Min. Burst Pressure (bar)	Min. Burst Pressure (psi)	Rated Flow (lpm)	Rated Flow (gpm)	Air Inclusion cc. max.	Fluid Loss cc.max.
5/8	207	3,000	621	9,000	45	12	2.8	2.8
3/4	207	3,000	621	9,000	106	28	10	8.2
1	207	3,000	621	9,000	189	50	14.2	14.2

Applications & Markets

- Hydraulic and Fluid Transfer
- Agricultural Equipment
- Construction Equipment
- Steel Mills
- Plant Manufacturing and Processing Equipment
- Dump, Snow Plow, and Maintenance Vehicles

Flow Data

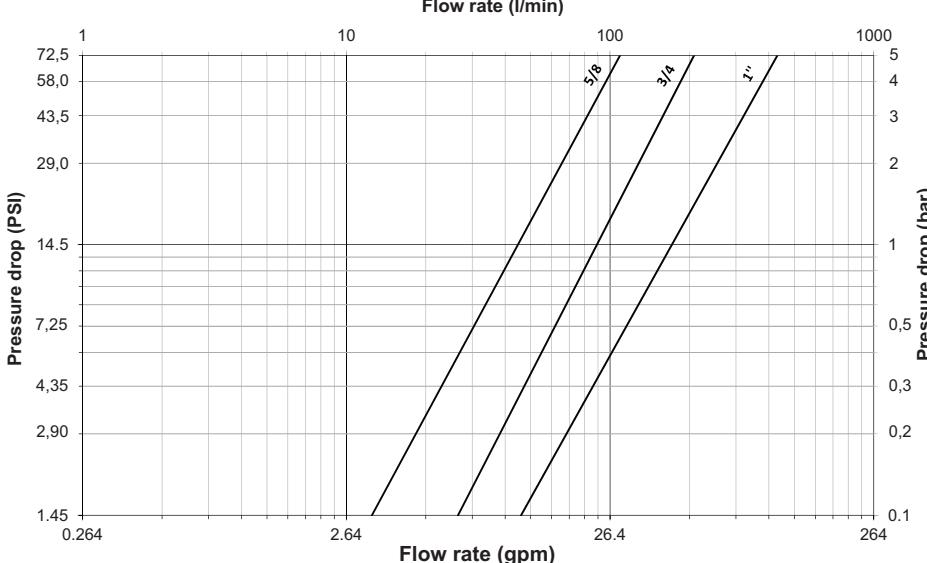

Hydraulic Oil viscosity : 30 Cst at 40°C / 104°F

5600 Series

5600 Series (Stainless Steel) ISO 7241-1 A Interchange




Figure 1




Figure 2




Figure 3

Female End Connections

Part Number	Coupling Type	Body Size	Thread	Fig.	Dimensions	A	B	Hex	A	B	Hex
					(in)	(in)	(in)	(mm)	(mm)	(mm)	
560024-8-10	Socket/Female	5/8	1/2-14 NPTF	1	2.61	1.5	1.19	66.3	38.1	30.2	
560024-12-12	Socket/Female	3/4	3/4-14 NPTF	1	3.25	1.81	1.50	82.6	46.0	38.1	
560024-16-16	Socket/Female	1	1 11-1/2 NPTF	1	3.82	2.1	1.69	97.0	53.3	42.9	

Plugs (Male)

Part Number	Coupling Type	Body Size	Thread	Fig.	Dimensions	A	B	Hex	A	B	Hex
					(in)	(in)	(in)	(mm)	(mm)	(mm)	
560049-8-10	Plug/Male	5/8	1/2-14 NPTF	2	2.02	–	1.06	51.3	–	26.9	
560049-12-12	Plug/Male	3/4	3/4-14 NPTF	2	2.55	–	1.38	64.8	–	35.1	
560049-16-16	Plug/Male	1	1 11-1/2 NPTF	2	3.1	–	1.62	78.7	–	41.1	

Complete Sets*

Part Number	Coupling Type	Body Size	Thread	Fig.	Dimensions	A	A
					(in)	(mm)	
FD56-1001-08-10	Complete	5/8	1/2-14 NPTF	3	3.78	96.0	
FD56-1001-12-12	Complete	3/4	3/4-14 NPTF	3	4.56	115.8	
FD56-1001-16-16	Complete	1	1 11-1/2 NPTF	3	4.86	123.4	

*Includes one socket/female and one plug/male half in the outlined size.

IA Series

ISO 7241-1 A Interchange



The IA Series meets ISO 7241-1 A Standard requirements and has a push-pull design, which allows the socket to be bulk-head-mounted. This configuration provides automatic connection or disconnection via a simple push or pull of the plug. Our IA Series is available in $\frac{1}{2}$ " with female or male end connections such as tube fittings, NPT, metric or SAE threads. It is widely used in agriculture and forestry applications.

Product Features

- ISO size: 12.5 mm ($\frac{1}{2}$ ")
- Standard body material: Zinc trivalent plated steel
- Wide offering of end connections, among which metric threads designed in accordance with ISO Standard 8434 $\frac{1}{2}$
- Standard seal material: NBR

- Optional PVC dust caps and plugs
- Designed and manufactured in accordance with Article 3.3 of the European Pressure Equipment Directive (PED) 97/23 EC.
- Meets dimensional requirements of ISO Standard 7241/1 Series A.

- Push-to-connect: the push-pull sleeve on the bulkhead-mounted socket provides automatic connection or disconnection via a simple push or pull of the plug. In the event of pull on the hose, the double-action sleeve gives immediate and automatic disconnection.

Physical Characteristics

Body Size (in)	ISO Size* (mm)	Nominal Flow Diameter (mm)	Max. Operating Pressure bar	Rated Flow** L/min	Rated Flow** (gpm)	Fluid Loss ml-cc.
$\frac{1}{2}$	12.5	6 8 10 10.3	250	3,625	45	11.9


* The ISO size corresponds to the internal diameter of the hose or the external diameter of the rigid tube (as defined in ISO 4397 Standard).

** Indicated values refer to a 1 bar/14.5 psi pressure drop.

Applications & Markets

- Agriculture
- Forestry machinery

Flow Data

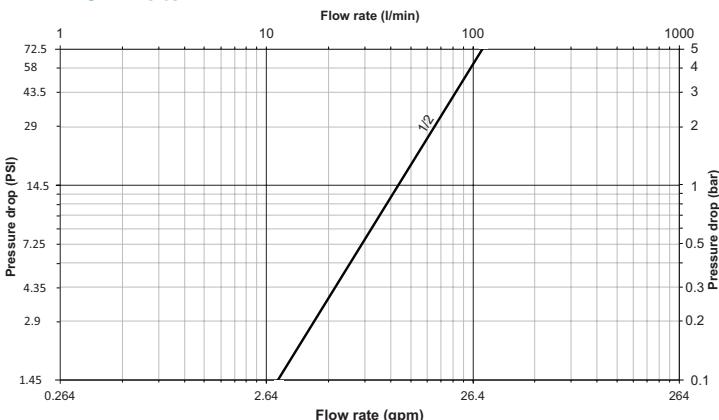

Seal Elastomer Data*

Seal Elastomer	Max. Operation Temperature Range
NBR (Nitrile)	-20°C +100°C/-4°F +212°F


*For reference only, based on Eaton recommended temperatures. Contact Eaton technical support for further information on fluid compatibility.

IA Series

ISO 7241-1 A Interchange

End Connections

ISO 6149-1



SAE J 1926-1

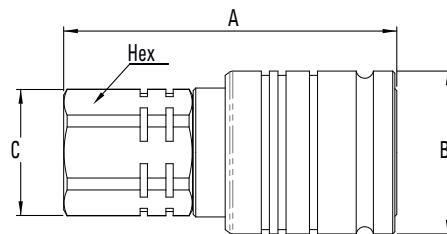





Figure 1

Sockets (Female) with Internal Thread

Part Number	Body Size	ISO Size	Nominal Flow Diameter	Thread Size (Female)				Dimensions						Weight				
				NPT	BSPP	ISO 6149-1	SAE J 1926-1	Fig.	A (in)	B (in)	C (in)	Hex (in)	A (mm)	B (mm)	C (mm)	Hex (mm)	lbs	grams
12IAS37BS	1/2	12.5	10.3	-	1/8-19	-	-	1	2.95	1.50	1.20	1.06	75	38	29.5	27	0.67	305
12IAS37				1/8-18	-	-	-	1	2.95	1.50	1.20	1.06	75	38	29.5	27	0.67	305
12IAS50BS				-	1/2-14	-	-	1	3.07	1.50	1.20	1.06	78	38	29.5	27	0.66	300
12IAS50				1/2-14	-	-	-	1	3.07	1.50	1.20	1.06	78	38	29.5	27	0.67	305
12IAS16FMET				-	-	M16x1.5	-	1	2.95	1.50	1.20	1.06	75	38	29.5	27	0.66	300
12IAS56UN				-	-	-	5/16 18f UNF	1	3.07	1.50	1.20	1.06	78	38	29.5	27	0.71	320
12IAS75UN				-	-	-	3/4 16f UNF	1	3.07	1.50	1.20	1.06	78	38	29.5	27	0.67	305
12IAS87UN				-	-	-	7/8 14f UNF	1	3.19	1.50	1.30	1.18	81	38	33	30	0.74	335

To obtain connected length of coupling add dimensions A (Fig. 1) and K (Fig. 3) or P (Fig. 4) together.

End Connections

ISO 8434-1
(standard version)ISO 8434-1
(bulkhead version)

SAE J 1926-2

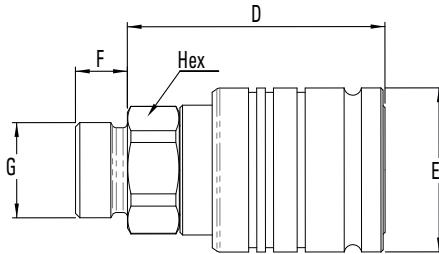



Figure 2

Sockets (Female) with External Thread

Part Number	Body Size	ISO Size	Nominal Flow Diameter	Thread Size (Male)				Dimensions						Weight					
				ISO 8434-1	SAE J 1926-2	Fig.	D (in)	E (in)	F (in)	G (in)	Hex (in)	D (mm)	E (mm)	F (mm)	G (mm)	Hex (mm)	lbs	grams	
12IAS56ORM	1/2	12.5	10.3	10.3	-	5/16 18f UNF	2	2.87	1.50	0.47	0.56	94	73	38	12	14.2	23.8	0.67	305
12IAS75ORM				10.3	-	3/4 16f UNF	2	2.87	1.50	0.55	0.75	94	73	38	14	19	23.8	0.68	310
12IAS8L				6	8L - M14x1.5	-	2	2.44	1.50	0.39	0.55	1.06	62	38	10	14	27	0.61	275
12IAS10L				8	10L - M16x1.5	-	2	2.40	1.50	0.43	0.63	1.06	61	38	11	16	27	0.60	270
12IAS10LBH				8	10L - M16x1.5 Bulkhead	-	2	2.44	1.50	1.38	0.63	1.06	62	38	35	16	27	0.68	310
12IAS12L				10	12L - M18x1.5	-	2	2.40	1.50	0.43	0.71	1.06	61	38	11	18	27	0.61	275
12IAS12LBH				10	12L - M18x1.5 Bulkhead	-	2	2.40	1.50	1.42	0.71	1.06	61	38	36	18	27	0.70	316
12IAS12S				8	12S - M20x1.5	-	2	2.40	1.50	0.47	0.79	1.06	61	38	12	20	27	0.62	282
12IAS15L				10.3	15L - M22x1.5	-	2	2.36	1.50	0.47	0.87	1.06	60	38	12	22	27	0.61	275
12IAS15LBH				10.3	15L - M22x1.5 Bulkhead	-	2	2.40	1.50	1.50	0.87	1.06	61	38	38	22	27	0.75	340
12IAS16S				10.3	16S - M24x1.5	-	2	2.36	1.50	0.55	0.94	1.06	60	38	14	24	27	0.62	280


To obtain connected length of coupling add dimensions D (Fig. 2) and K (Fig. 3) or P (Fig. 4) together.

IA Series

ISO 7241-1 A Interchange

End Connections

ISO 6149-1



SAE J 1926-1

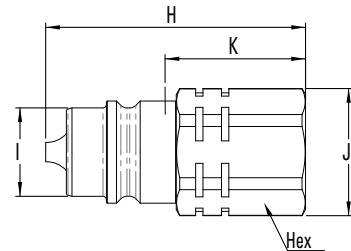





Fig. 3

Plugs (Male) with Internal Thread

Part Number	Body Size	ISO Size	Nominal Flow Diameter	Thread Size (Female)		Fig.	Dimensions						Weight							
				NPT	BSPP		H (in)	I (in)	J (in)	K (in)	Hex (in)	H (mm)	I (mm)	J (mm)	K (mm)	Hex (mm)	Ibs	grams		
12IAP37BS				-	3/8-19	-	-	3	2.24	0.84	1.20	1.22	1.06	57	20.5	29.5	31	27	0.28	125
12IAP37				3/8	-	-	-	3	2.24	0.84	1.20	1.22	1.06	57	20.5	29.5	31	27	0.29	130
12IAP50BS				-	1/2-14	-	-	3	2.36	0.84	1.20	1.34	1.06	60	20.5	29.5	34	27	0.28	125
12IAP50				1/2	-	-	-	3	2.36	0.84	1.20	1.34	1.06	60	20.5	29.5	34	27	0.28	125
12IAP16FMET	1/2	12.5	10.3	-	-	M16x1.5	-	3	2.24	0.84	1.20	1.22	1.06	57	20.5	29.5	31	27	0.26	120
12IAP56UN				-	-	-	5/16 18f UNF	3	2.36	0.84	1.20	1.34	1.06	60	20.5	29.5	34	27	0.31	140
12IAP75UN				-	-	-	3/4 16f UNF	3	2.36	0.84	1.20	1.34	1.06	60	20.5	29.5	34	27	0.28	125
12IAP87UN				-	-	-	7/8 14f UNF	3	2.48	0.84	1.30	1.46	1.18	63	20.5	33	37	30	0.34	155

To obtain connected length of coupling add dimensions K (Fig. 3) and A (Fig. 1) or D (Fig. 2) together.

End Connections

ISO 8434-1
(standard version)ISO 8434-1
(bulkhead version)

SAE J 1926-2





Fig. 4

Plugs (Male) with External Thread

Part Number	Body Size	ISO Size	Nominal Flow Diameter	Thread Size (Male)		Fig.	Dimensions						Weight							
				ISO 8434-1	SAE J 1926-2		L (in)	M (in)	N (in)	O (in)	P (in)	Hex (in)	L (mm)	M (mm)	N (mm)	O (mm)	P (mm)	Hex (mm)	Ibs	grams
12IAP56ORM			10.3	-	5/16 18f UNF	4	2.20	0.47	0.84	0.56	1.18	0.94	56	12	20.5	14.2	30	23.8	0.28	125
12IAP75ORM			10.3	-	3/4 16f UNF	4	2.20	0.55	0.84	0.75	1.18	0.94	56	14	20.5	19	30	23.8	0.29	130
12IAP8L			6	8L - M14x1.5	-	4	1.75	0.39	0.84	0.55	0.71	1.06	44.5	10	20.5	14	18	27	0.21	95
12IAP10L			8	10L - M16x1.5	-	4	1.71	0.43	0.84	0.63	0.67	1.06	43.5	11	20.5	16	17	27	0.21	95
12IAP10LBH			8	10L - M16x1.5 Bulkhead	-	4	1.75	1.38	0.84	0.63	0.71	1.06	44.5	35	20.5	16	18	27	0.30	135
12IAP12L	1/2	12.5	10	12L - M18x1.5	-	4	1.71	0.43	0.84	0.71	0.67	1.06	43.5	11	20.5	18	17	27	0.21	95
12IAP12LBH			10	12L - M18x1.5 Bulkhead	-	4	1.71	1.42	0.84	0.71	0.67	1.06	43.5	36	20.5	18	17	27	0.30	136
12IAP12S			8	12S - M20x1.5	-	4	1.71	0.47	0.84	0.79	0.67	1.06	43.5	12	20.5	20	17	27	0.22	102
12IAP15L			10.3	15L - M22x1.5	-	4	1.67	0.47	0.84	0.87	0.63	1.06	42.5	12	20.5	22	16	27	0.21	95
12IAP15LBH			10.3	15L - M22x1.5 Bulkhead	-	4	1.71	1.50	0.84	0.87	0.67	1.06	43.5	38	20.5	22	17	27	0.35	160
12IAP16S			10.3	16S - M24x1.5	-	4	1.67	0.55	0.84	0.94	0.63	1.06	42.5	14	20.5	24	16	27	0.22	100

To obtain connected length of coupling add dimensions P (Fig. 4) and A (Fig. 1) or D (Fig. 2) together.

Dust Plugs and Dust Caps

Body Size	Socket Dust Plug Part Number	Plug Dust Cap Part Number
(in)	Plastic	Plastic
1/2	HP1513100	HP1513200



H5000 Series (Steel)



Eaton's H5000 Series steel quick disconnect coupling is a pull to connect double shut-off coupling. Featuring the original Eaton's Gromelle™ profile, it remains as the series users prefer when it comes to severe hydraulic applications such as high pressure, pressure impulses, heavy mechanical loads and frequent connection and disconnection cycles. The unique sleeve lock option offers a reliable solution and benefit to the end user when safety is a concern.

Product Features

- Proprietary profile
- Pull-to-connect with double shut-off valving
- Ball-locking
- Optional safety sleeve lock prevents accidental disconnections
- Optional dust caps and plugs (made of anodized aluminium)
- Pressure performance
- Standard body material: Zinc trivalent steel
- Standard seal material: NBR, FKM, EPDM

- The heat treatment of the plug and use of high strength steel for the socket sleeve provide superior mechanical and hydraulic performance. The design of the valve gives the coupling increased robustness when disconnected.

Physical Characteristics

Body Size (in)	Nominal Flow Diameter (mm)	Max. Operating Pressure*		Hazardous liquids & gases in Group 1		Rated Flow** (lpm)	(gpm)	ml-cc.	Fluid Loss
		Non hazardous liquids & gases in Group 2 (bar)	(psi)	(bar)	(psi)				
1/8	3.8	1,000	14,500	1,000	14,500	6.1	1.61	0.4	
1/4	5.7	700	10,150	700	10,150	11.6	3.06	1	
3/8	7.6	600	8,700	600	8,700	16.7	4.41	2	
1/2	10.3	500	7,250	500	7,250	25.5	6.74	2.5	
5/8	14.2	400	5,800	400	5,800	55	14.53	5.5	
1	16.5	300	4,350	300	4,350	87	22.98	9	
1 1/4	20.5	200	2,900	200	2,900	140	36.98	23	
1 1/2	25.8	150	2,175	38	550	208	54.95	36	
2	34.7	100	1,450	28	405	357	94.3	70	

* For pulsating pressures when disconnected apply a multiplier of 0.5

** Indicated values refer to a 1 bar/14.5 psi pressure drop.

European Pressure Equipment Directive


Couplings with nominal diameters up to and including 25 mm are designed and manufactured under Article 3.3 of the European Pressure Equipment Directive 97/23 EC. Couplings with nominal diameters greater than 25 mm are designed and manufactured in accordance with the stipulations of Module A of the European Pressure Equipment Directive 97/23 EC. They should not be used to convey unstable gases.

Group 1 = Hazardous media / Group 2 = Other media

Applications & Markets

- Automobile
- Agriculture
- Construction
- Oil and Gas
- Railway
- Aeronautics
- Food processing
- Iron and Steel Industry
- Electronics
- Laboratories
- General hydraulic applications

Flow Data

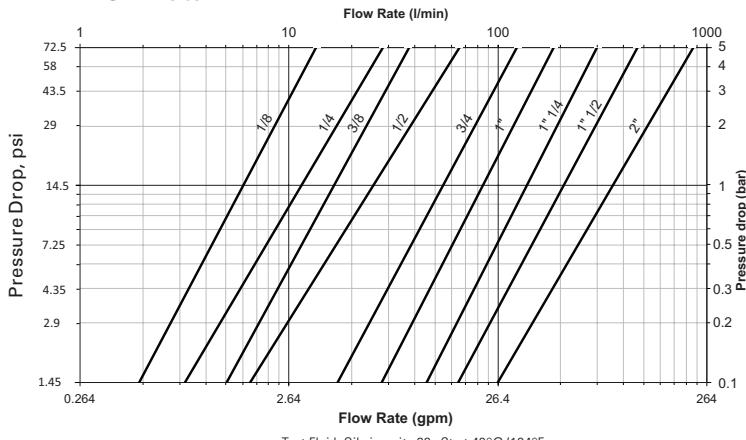

Seal Elastomer Data*

Seal Elastomer	Max. Operation Temperature Range
NBR (Nitrile)	-20°C +100°C/-4°F +212°F
FKM	-20°C +200°C/-4°F +392°F
EPDM (Ethylene-Propylene)**	-40°C +150°C/-40°F +302°F

* For reference only, based on Eaton recommended temperatures.

** In accordance with NF L 17-241 or NAS 1613 rev. 5

Contact Eaton technical support for further information on fluid compatibility.

H5000 Series (Steel)

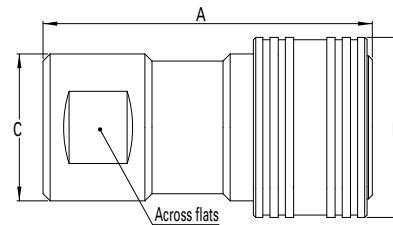


Figure 1

Sockets (Female)

Part Number			Body Size	Nominal Flow Diameter			Thread Size** (Female)			Dimensions						Weight			
NBR*	FKM	EPDM		(in)	(mm)	NPT	BSPP	Metric	Fig.	A (in)	B (in)	C (in)	Across flats (in)	A (mm)	B (mm)	C (mm)	Across flats (mm)	Ibs	grams
HA0500100	HA05001V0	HA05001E0	1/8	3.8	-	1/8-28	-	-	1	1.65	0.94	0.83	0.63	42	24	21	16	0.19	88
HA0520100	HA05201V0	HA05201E0	1/8	3.8	1/8-27	-	-	-	1	1.65	0.94	0.83	0.63	42	24	21	16	0.19	88
HA0530100	HA05301V0	HA05301E0	1/8	3.8	-	-	-	M10x100	1	1.65	0.94	0.83	0.63	42	24	21	16	0.19	88
HA0501100	HA05011V0	HA05011E0	1/4	5.7	-	1/4-19	-	-	1	1.97	1.10	0.94	0.75	50	28	24	19	0.27	122
HA0521100	HA05211V0	HA05211E0	1/4	5.7	1/4-18	-	-	-	1	1.97	1.10	0.94	0.75	50	28	24	19	0.27	122
HA0531100	HA05311V0	HA05311E0	1/4	5.7	-	-	-	M14x150	1	1.97	1.10	0.94	0.75	50	28	24	19	0.27	122
HA0502100	HA05021V0	HA05021E0	3/8	7.6	-	3/8-19	-	-	1	2.32	1.34	1.10	0.90	59	34	28	23	0.43	197
HA0522100	HA05221V0	HA05221E0	3/8	7.6	3/8-18	-	-	-	1	2.32	1.34	1.10	0.90	59	34	28	23	0.43	197
HA0532100	HA05321V0	HA05321E0	3/8	7.6	-	-	-	M18x150	1	2.32	1.34	1.10	0.90	59	34	28	23	0.43	197
HA0503100	HA05031V0	HA05031E0	1/2	10.3	-	1/2-14	-	-	1	2.71	1.50	1.22	1.06	69	38	31	27	0.50	226
HA0523100	HA05231V0	HA05231E0	1/2	10.3	1/2-14	-	-	-	1	2.71	1.50	1.22	1.06	69	38	31	27	0.50	226
HA0533100	HA05331V0	HA05331E0	1/2	10.3	-	-	-	M22x150	1	2.71	1.50	1.22	1.06	69	38	31	27	0.50	226
HA0504100	HA05041V0	HA05041E0	3/4	14.2	-	3/4-14	-	-	1	3.50	1.89	1.57	1.38	89	48	40	35	1.27	577
HA0524100	HA05241V0	HA05241E0	3/4	14.2	3/4-14	-	-	-	1	3.50	1.89	1.57	1.38	89	48	40	35	1.27	577
HA0534100	HA05341V0	HA05341E0	3/4	14.2	-	-	-	M27x150	1	3.50	1.89	1.57	1.38	89	48	40	35	1.27	577
HA0505100	HA05051V0	HA05051E0	1	16.5	-	1-11	-	-	1	3.89	2.05	1.77	1.61	99	52	45	41	1.59	720
HA0525100	HA05251V0	HA05251E0	1	16.5	1-11 1/2	-	-	-	1	3.89	2.05	1.77	1.61	99	52	45	41	1.59	720
-	HA05061V0	HA05061E0	1 1/4	20.5	-	1 1/4-11	-	-	1	5.20	2.95	2.44	2.16	132	75	62	55	4.77	2,165
-	HA05071V0	HA05071E0	1 1/2	25.8	-	1 1/2-11	-	-	1	5.90	3.35	2.95	2.56	150	85	75	65	7.72	3,500
-	HA05091V0	HA05091E0	2	34.7	-	2-11	-	-	1	6.69	3.82	3.35	2.95	170	97	85	75	10.67	4,840

* Body sizes 1 1/4, 1 1/2 and 2 are supplied with FKM seals as a standard.

** Alternative end connections available upon request.

To obtain connected length of coupling add dimensions A (Fig. 1) and J (Fig. 3) together.

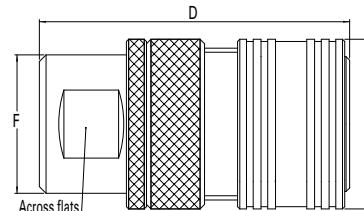


Figure 2

Sockets with Sleeve Lock (Female)

Part Number			Body Size	Nominal Flow Diameter			Thread Size** (Female)			Dimensions						Weight			
NBR*	FKM	EPDM		(in)	(mm)	NPT	BSPP	Metric	Fig.	D (in)	E (in)	F (in)	Across flats (in)	D (mm)	E (mm)	F (mm)	Across flats (mm)	Ibs	grams
HA0500300	HA05003V0	HA05003E0	1/8	3.8	-	1/8-28	-	-	2	1.65	0.94	0.83	0.63	42	24	21	16	0.19	91
HA0520300	HA05203V0	HA05203E0	1/8	3.8	1/8-27	-	-	-	2	1.65	0.94	0.83	0.63	42	24	21	16	0.19	91
HA0530300	HA05303V0	HA05303E0	1/8	3.8	-	-	-	M10x100	2	1.65	0.94	0.83	0.63	42	24	21	16	0.19	91
HA0501300	HA05013V0	HA05013E0	1/4	5.7	-	1/4-19	-	-	2	1.97	1.10	0.94	0.75	50	28	24	19	0.27	134
HA0521300	HA05213V0	HA05213E0	1/4	5.7	1/4-18	-	-	-	2	1.97	1.10	0.94	0.75	50	28	24	19	0.27	134
HA0531300	HA05313V0	HA05313E0	1/4	5.7	-	-	-	M14x150	2	1.97	1.10	0.94	0.75	50	28	24	19	0.27	134
HA0502300	HA05023V0	HA05023E0	3/8	7.6	-	3/8-19	-	-	2	2.32	1.34	1.10	0.90	59	34	28	23	0.43	225
HA0522300	HA05223V0	HA05223E0	3/8	7.6	3/8-18	-	-	-	2	2.32	1.34	1.10	0.90	59	34	28	23	0.43	225
HA0532300	HA05323V0	HA05323E0	3/8	7.6	-	-	-	M18x150	2	2.32	1.34	1.10	0.90	59	34	28	23	0.43	225
HA0503300	HA05033V0	HA05033E0	1/2	10.3	-	1/2-14	-	-	2	2.71	1.50	1.22	1.06	69	38	31	27	0.50	310
HA0523300	HA05233V0	HA05233E0	1/2	10.3	1/2-14	-	-	-	2	2.71	1.50	1.22	1.06	69	38	31	27	0.50	310
HA0533300	HA05333V0	HA05333E0	1/2	10.3	-	-	-	M22x150	2	2.71	1.50	1.22	1.06	69	38	31	27	0.50	310
HA0504300	HA05043V0	HA05043E0	3/4	14.2	-	3/4-14	-	-	2	3.50	1.89	1.57	1.38	89	48	40	35	1.27	665
HA0524300	HA05243V0	HA05243E0	3/4	14.2	3/4-14	-	-	-	2	3.50	1.89	1.57	1.38	89	48	40	35	1.27	665
HA0534300	HA05343V0	HA05343E0	3/4	14.2	-	-	-	M27x150	2	3.50	1.89	1.57	1.38	89	48	40	35	1.27	665
HA0505300	HA05053V0	HA05053E0	1	16.5	-	1-11	-	-	2	3.89	2.05	1.77	1.61	99	52	45	41	1.59	813
HA0525300	HA05253V0	HA05253E0	1	16.5	1-11 1/2	-	-	-	2	3.89	2.05	1.77	1.61	99	52	45	41	1.59	813
-	HA05063V0	HA05063E0	1 1/4	20.5	-	1 1/4-11	-	-	2	5.20	2.95	2.44	2.16	132	75	62	55	4.77	2,230
-	HA05073V0	HA05073E0	1 1/2	25.8	-	1 1/2-11	-	-	2	5.90	3.35	2.95	2.56	150	85	75	65	7.72	3,585
-	HA05093V0	HA05093E0	2	34.7	-	2-11	-	-	2	6.69	3.82	3.35	2.95	170	97	85	75	10.67	5,658

* Body sizes 1 1/4, 1 1/2 and 2 are supplied with FKM seals as a standard.

** Alternative end connections available upon request.

To obtain connected length of coupling add dimensions D (Fig. 2) and J (Fig. 3) together.

H5000 Series (Steel)

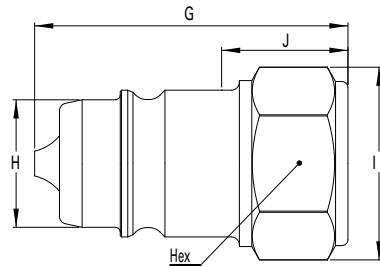


Figure 3

Plugs (Male)

Part Number	Body Size	Nominal Flow Diameter	Dimensions						Weight											
			NPT	BSPP	Metric	Fig.	G (in)	H (in)	I (in)	J (in)	Hex (in)	G (mm)	H (mm)	I (mm)	J (mm)	Hex (mm)	lbs	grams		
HA0500200	HA05002V0	HA05002E0	1/8	3.8	-	1/8-28	-	3	1.10	0.43	0.72	0.39	0.63	28	11	18.4	10	16	0.05	23
HA0520200	HA05202V0	HA05202E0	1/8	3.8	1/8-27	-	-	3	1.10	0.43	0.72	0.39	0.63	28	11	18.4	10	16	0.05	23
HA0530200	HA05302V0	HA05302E0	1/8	3.8	-	-	M10x100	3	1.10	0.43	0.72	0.39	0.63	28	11	18.4	10	16	0.05	23
HA0501200	HA05012V0	HA05012E0	1/4	5.7	-	1/4-19	-	3	1.38	0.56	0.86	0.55	0.75	35	14.2	21.8	14	19	0.08	37
HA0521200	HA05212V0	HA05212E0	1/4	5.7	1/4-18	-	-	3	1.38	0.56	0.86	0.55	0.75	35	14.2	21.8	14	19	0.08	37
HA0531200	HA05312V0	HA05312E0	1/4	5.7	-	-	M14x150	3	1.38	0.56	0.86	0.55	0.75	35	14.2	21.8	14	19	0.08	37
HA0502200	HA05022V0	HA05022E0	5/8	7.6	-	5/8-19	-	3	1.65	0.75	1.04	0.7	0.90	42	19	26.4	18	23	0.15	70
HA0522200	HA05222V0	HA05222E0	5/8	7.6	5/8-18	-	-	3	1.65	0.75	1.04	0.7	0.90	42	19	26.4	18	23	0.15	70
HA0532200	HA05322V0	HA05322E0	5/8	7.6	-	-	M18x150	3	1.65	0.75	1.04	0.7	0.90	42	19	26.4	18	23	0.15	70
HA0503200	HA05032V0	HA05032E0	1/2	10.3	-	1/2-14	-	3	1.97	0.81	1.22	0.94	1.06	50	20.6	31	24	27	0.20	92
HA0523200	HA05232V0	HA05232E0	1/2	10.3	1/2-14	-	-	3	1.97	0.81	1.22	0.94	1.06	50	20.6	31	24	27	0.20	92
HA0533200	HA05332V0	HA05332E0	1/2	10.3	-	-	M22x150	3	1.97	0.81	1.22	0.94	1.06	50	20.6	31	24	27	0.20	92
HA0504200	HA05042V0	HA05042E0	5/8	14.2	-	5/8-14	-	3	2.48	1.10	1.58	1.10	1.38	63	27.9	40.2	28	35	0.48	217
HA0524200	HA05242V0	HA05242E0	5/8	14.2	5/8-14	-	-	3	2.48	1.10	1.58	1.10	1.38	63	27.9	40.2	28	35	0.48	217
HA0534200	HA05342V0	HA05342E0	5/8	14.2	-	-	M27x150	3	2.48	1.10	1.58	1.10	1.38	63	27.9	40.2	28	35	0.48	217
HA0505200	HA05052V0	HA05052E0	1	16.5	-	1-11	-	3	2.79	1.27	1.87	1.22	1.61	71	32.4	47.5	31	41	0.63	287
HA0525200	HA05252V0	HA05252E0	1	16.5	1-11 1/2	-	-	3	2.79	1.27	1.87	1.22	1.61	71	32.4	47.5	31	41	0.63	287
-	HA05062V0	HA05062E0	1 1/4	20.5	-	1 1/4-11	-	3	3.82	1.85	2.49	1.89	2.16	97	46.9	63.2	48	55	1.98	900
-	HA05072V0	HA05072E0	1 1/2	25.8	-	1 1/2-11	-	3	4.29	2.20	2.94	2.04	2.56	109	56	74.7	52	65	3.30	1500
-	HA05092V0	HA05092E0	2	34.7	-	2-11	-	3	4.76	2.56	3.30	1.97	2.95	121	65	84	50	75	4.06	1840

* Body sizes 1 1/4, 1 1/2 and 2 are supplied with FKM seals as a standard.

** Alternative end connections available upon request.

To obtain connected length of coupling add dimensions A (Fig. 1) and J (Fig. 3) together for standard version ; add dimensions D (Fig. 2) and J (Fig. 3) together for sleeve lock version.

Dust Plugs and Dust Caps

Body Size	Socket Dust Plug Part Number	Plug Dust Cap Part Number
(in)	Anodized Aluminium	Anodized Aluminium
1/8	HD0510100	HD0510200
1/4	HD0511100	HD0511200
3/8	HD0512100	HD0512200
1/2	HD0513100	HD0513200
5/8	HD0514100	HD0514200
1	HD0515100	HD0515200
1 1/4	HD0516100	HD0516200
1 1/2	HD0517100	HD0517200
2	HD0519100	HD0519200

Socket Dust Plug



H5000 Series (Brass)



Eaton's H5000 Series brass quick disconnect coupling is a pull-to-connect double shut-off coupling. It is a general purpose industrial quick disconnect coupling with the original Eaton's Gromelle™ profile. Mainly used in fluid transfer applications where stainless steel is not a requirement, it offers a good alternative for corrosion resistance.

Product Features

- Proprietary profile
- Pull-to-connect with double shut-off valving
- Ball-locking
- Pressure performance
- Optional safety sleeve lock prevents accidental disconnections
- Optional dust caps and plugs (made of anodized aluminium)

- Standard body material: Nickel-plated brass
- Standard seal material: NBR, FKM, EPDM

European Pressure Equipment Directive

Couplings with nominal diameters up to and including 25 mm are designed and manufactured under Article 3.3 of the European Pressure Equipment Directive 97/23 EC. Couplings with nominal diameters greater than 25 mm are designed and manufactured under Article 3.3 of the European Pressure Equipment Directive 97/23 EC. They should not be used to convey gases in Group 1 (hazardous).

Group 1 = Hazardous media / Group 2 = Other media

Physical Characteristics

Body Size	Nominal Flow Diameter*	Max. Operating Pressure**						Fluid Loss
		Hazardous and Non hazardous liquids in Group 1 & 2	Hazardous Gases in Group 1	Rated Flow***	(lpm)	(gpm)	ml-cc.	
1/8	3.8	300	4,350	300	4,350	6.1	1.61	0.4
1/4	5.7	230	3,335	230	3,335	11.6	3.06	1
5/16	7.6	175	2,535	175	2,535	16.7	4.41	2
1/2	10.3	150	2,175	150	2,175	25.5	6.74	2.5
3/4	14.2	125	1,810	125	1,810	55	14.53	5.5
1	16.5	100	1,450	100	1,450	87	22.98	9
1 1/4	20.5	70	1,015	70	1,015	140	36.98	23
1 1/2	25.8	50	725	50	725	208	54.95	36
2	34.7	40	290	20	580	357	94.3	70

* Nominal diameters over 25 mm should not be used to convey gases in Group 1 (PED 97/23 EC)


** For pulsating pressures when disconnected apply a multiplier of 0.5

*** Indicated values refer to a 1 bar/14.5 psi pressure drop.

Applications & Markets

- Automobile
- Agriculture
- Construction
- Oil and Gas
- Railway
- Aeronautics
- Food processing
- Iron and Steel Industry
- Electronics
- Laboratories
- General hydraulic applications

Flow Data

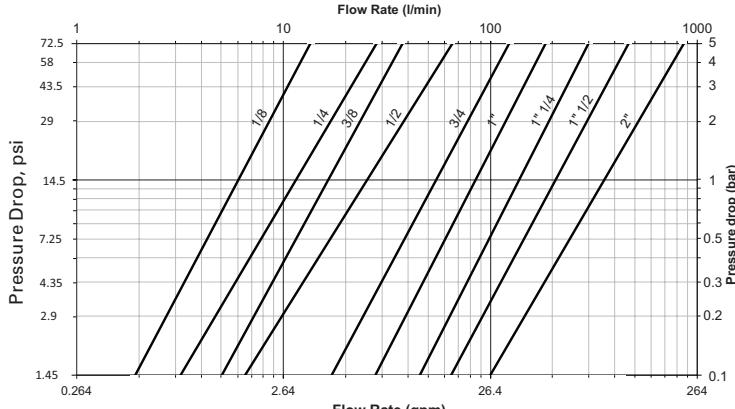

Test Fluid: Oil viscosity 30 cSt at 40°C/104°F

Seal Elastomer Data*

Seal Elastomer	Max. Operation Temperature Range
NBR (Nitrile)	-20°C +100°C/-4°F +212°F
FKM (Fluorocarbon)	-20°C +200°C/-4°F +392°F
EPDM (Ethylene-Propylene)**	-40°C +150°C/-40°F +302°F

* For reference only, based on Eaton recommended temperatures.

** In accordance with NF L 17-241 or NAS 1613 rev. 5

Contact Eaton technical support for further information on fluid compatibility.

H5000 Series (Brass)

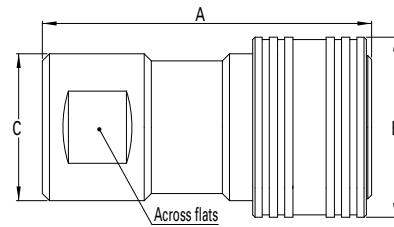


Figure 1

Sockets (Female)

Part Number			Body Size	Nominal Flow Diameter	Thread Size* (Female)	Dimensions						Weight				
NBR	FKM	EPDM	(in)	(mm)	BSPP	Fig.	A (in)	B (in)	C (in)	Across flats (in)	A (mm)	B (mm)	C (mm)	Across flats (mm)	lbs	grams
HL0500100	HL05001V0	HL05001E0	1/8	3.8	1/8-28	1	1.65	0.94	0.83	0.63	42	24	21	16	0.21	97
HL0501100	HL05011V0	HL05011E0	1/4	5.7	1/4-19	1	1.97	1.10	0.94	0.75	50	28	24	19	0.30	134
HL0502100	HL05021V0	HL05021E0	3/8	7.6	3/8-19	1	2.32	1.34	1.10	0.90	59	34	28	23	0.48	217
HL0503100	HL05031V0	HL05031E0	1/2	10.3	1/2-14	1	2.71	1.50	1.22	1.06	69	38	31	27	0.55	249
HL0504100	HL05041V0	HL05041E0	5/8	14.2	5/8-14	1	3.50	1.89	1.57	1.38	89	48	40	35	1.40	635
HL0505100	HL05051V0	HL05051E0	1	16.5	1-11	1	3.89	2.05	1.77	1.61	99	52	45	41	1.75	792
HL0506100	HL05061V0	HL05061E0	1 1/4	20.5	1 1/4-11	1	5.20	2.95	2.44	2.16	132	75	62	55	5.25	2,382
HL0507100	HL05071V0	HL05071E0	1 1/2	25.8	1 1/2-11	1	5.90	3.35	2.95	2.56	150	85	75	65	8.49	3,850
HL0509100	HL05091V0	HL05091E0	2	34.7	2-11	1	6.69	3.82	3.35	2.95	170	97	85	75	11.74	5,324

* Alternative end connections available upon request.

To obtain connected length of coupling add dimensions A (Fig. 1) and J (Fig. 3) together.

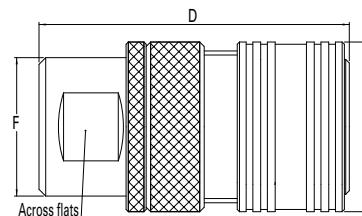


Figure 2

Sockets with Sleeve Lock (Female)

Part Number			Body Size	Nominal Flow Diameter	Thread Size* (Female)	Dimensions						Weight				
NBR	FKM	EPDM	(in)	(mm)	BSPP	Fig.	D (in)	E (in)	F (in)	Across flats (in)	D (mm)	E (mm)	F (mm)	Across flats (mm)	lbs	grams
HL0500300	HL05003V0	HL05003E0	1/8	3.8	1/8-28	2	1.65	0.94	0.83	0.63	42	24	21	16	0.22	100
HL0501300	HL05013V0	HL05013E0	1/4	5.7	1/4-19	2	1.97	1.10	0.94	0.75	50	28	24	19	0.33	148
HL0502300	HL05023V0	HL05023E0	3/8	7.6	3/8-19	2	2.32	1.34	1.10	0.90	59	34	28	23	0.55	248
HL0503300	HL05033V0	HL05033E0	1/2	10.3	1/2-14	2	2.71	1.50	1.22	1.06	69	38	31	27	0.75	341
HL0504300	HL05043V0	HL05043E0	5/8	14.2	5/8-14	2	3.50	1.89	1.57	1.38	89	48	40	35	1.61	732
HL0505300	HL05053V0	HL05053E0	1	16.5	1-11	2	3.89	2.05	1.77	1.61	99	52	45	41	1.97	894
HL0506300	HL05063V0	HL05063E0	1 1/4	20.5	1 1/4-11	2	5.20	2.95	2.44	2.16	132	75	62	55	5.41	2,453
HL0507300	HL05073V0	HL05073E0	1 1/2	25.8	1 1/2-11	2	5.90	3.35	2.95	2.56	150	85	75	65	8.69	3,944
HL0509300	HL05093V0	HL05093E0	2	34.7	2-11	2	6.69	3.82	3.35	2.95	170	97	85	75	13.72	6,224

* Alternative end connections available upon request.

To obtain connected length of coupling add dimensions D (Fig. 2) and J (Fig. 3) together.

H5000 Series (Brass)

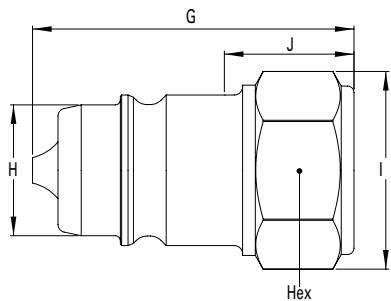


Figure 3

Plugs (Male)

Part Number	Body Size	Nominal Flow Diameter	Thread Size** (Female)	Dimensions								Weight				
				BSPP	Fig.	G (in)	H (in)	I (in)	J (in)	Hex (in)	G (mm)	H (mm)	I (mm)	J (mm)	Hex (mm)	lbs
HL0500200	1/8	3.8	1/8-28	3	1.1	0.43	0.72	0.39	0.63	28	11	18.4	10	16	0.06	26
HL0501200	1/4	5.7	1/4-19	3	1.38	0.56	0.86	0.55	0.75	35	14.2	21.8	14	19	0.09	41
HL0502200	3/8	7.6	3/8-19	3	1.65	0.75	1.04	0.70	0.90	42	19	26.4	18	23	0.17	77
HL0503200	1/2	10.3	1/2-14	3	1.97	0.81	1.22	0.94	1.06	50	20.6	31	24	27	0.22	101
HL0504200	5/8	14.2	5/8-14	3	2.48	1.10	1.58	1.10	1.38	63	27.9	40.2	28	35	0.53	239
HL0505200	1	16.5	1-11	3	2.79	1.27	1.87	1.22	1.61	71	32.4	47.5	31	41	0.70	316
-	1 1/4	20.5	1 1/4-11	3	3.82	1.85	2.49	1.89	2.16	97	46.9	63.2	48	55	2.18	990
-	1 1/2	25.8	1 1/2-11	3	4.29	2.20	2.94	2.04	2.56	109	56	74.7	52	65	3.64	1650
HL05092V0	2	34.7	2-11	3	4.76	2.56	3.30	1.97	2.95	121	65	84	50	75	4.46	2024

* Body sizes 1/4, 1/2 and 2 are supplied with FKM seals as a standard.

** Alternative end connections available upon request.

To obtain connected length of coupling add dimensions A (Fig. 1) and J (Fig. 3) together for standard version; add dimensions D (Fig. 2) and J (Fig. 3) together for sleeve lock version

Dust Plugs and Dust Caps

Body Size	Socket Dust Plug Part Number	Plug Dust Cap Part Number
(in)	Anodized Aluminium	Anodized Aluminium
1/8	HD0510100	HD0510200
1/4	HD0511100	HD0511200
3/8	HD0512100	HD0512200
1/2	HD0513100	HD0513200
5/8	HD0514100	HD0514200
1	HD0515100	HD0515200
1 1/4	HD0516100	HD0516200
1 1/2	HD0517100	HD0517200
2	HD0519100	HD0519200



H5000 Series (Stainless Steel)



Product Features

- Proprietary profile
- Pull-to-connect with double shut-off valving
- Ball-locking
- Optional safety sleeve lock prevents accidental disconnections
- Optional dust caps and plugs (made of anodized aluminium)
- Pressure performance
- Standard body material: AISI 316L Stainless steel
- Standard seal material: FKM, EPDM

European Pressure Equipment Directive

Couplings with nominal diameters up to and including 25 mm are designed and manufactured under Article 3.3 of the European Pressure Equipment Directive 97/23 EC. Couplings with nominal diameters greater than 25 mm are designed and manufactured in accordance with the stipulations of Module A of the European Pressure Equipment Directive 97/23 EC. They should not be used to convey unstable gases.

Group 1 = Hazardous media / Group 2 = Other media

Physical Characteristics

Body Size (in)	Nominal Flow Diameter (mm)	Max. Operating Pressure*				Rated Flow** (lpm)	(gpm)	ml-cc.
		Non hazardous liquids & gases Group 2	Non hazardous liquids & gases Group 1	(bar)	(psi)			
1/8	3.8	300	4,350	300	4,350	6.1	1.61	0.4
1/4	5.7	230	3,335	230	3,335	11.6	3.06	1
5/16	7.6	175	2,535	175	2,535	16.7	4.41	2
1/2	10.3	150	2,175	150	2,175	25.5	6.74	2.5
3/4	14.2	125	1,810	125	1,810	55	14.53	5.5
1	16.5	100	1,450	100	1,450	87	22.98	9
1 1/4	20.5	100	1,450	100	1,450	140	36.98	23
1 1/2	25.8	75	1,085	28	550	208	54.95	36
2	34.7	40	580	38	405	357	94.30	70


* For pulsating pressures when disconnected apply a multiplier of 0.5

** Indicated values refer to a 1 bar/14.5 psi pressure drop.

Applications & Markets

- Automobile
- Agriculture
- Construction
- Oil and Gas
- Railway
- Aeronautics
- Food processing
- Iron and Steel Industry
- Electronics
- Laboratories
- General hydraulic applications

Flow Data

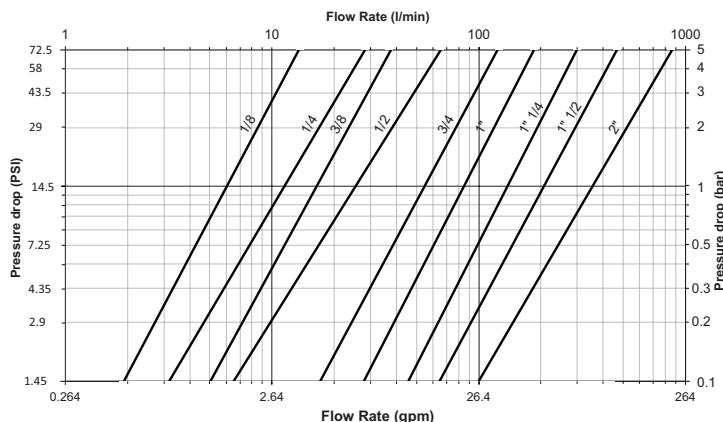

Seal Elastomer Data*

Seal Elastomer	Max. Operation Temperature Range
FKM	-20°C +200°C/-4°F +392°F
EPDM (Ethylene-Propylene)* **	-40°C +150°C/-40°F +302°F

* For reference only, based on Eaton recommended temperatures.

** In accordance with NF L 17-241 or NAS 1613 rev. 5

Contact Eaton technical support for further information on fluid compatibility.

H5000 Series (Stainless Steel)

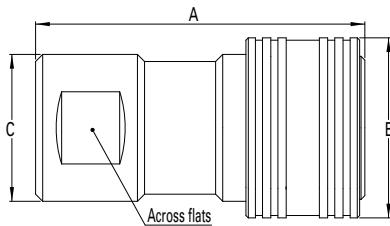


Figure 1

Sockets (Female)

Part Number	FKM	EPDM	Body Size (in)	Nominal Flow Diameter (mm)	Thread Size* (Female)		Dimensions							Weight			
					NPT	BSPP	Fig.	A (in)	B (in)	C (in)	Across flats (in)	A (mm)	B (mm)	C (mm)	Across flats (mm)	lbs	grams
HZ05001V0	HZ05001E0	1/8	3.8	-	1/8-28	-	1	1.65	0.94	0.83	0.63	42	24	21	16	0.19	88
HZ05201V0	HZ05201E0	1/8	3.8	1/8-27	-	-	1	1.65	0.94	0.83	0.63	42	24	21	16	0.19	88
HZ05011V0	HZ05011E0	1/4	5.7	-	1/4-19	-	1	1.97	1.10	0.94	0.75	50	28	24	19	0.27	122
HZ05211V0	HZ05211E0	1/4	5.7	1/4-18	-	-	1	1.97	1.10	0.94	0.75	50	28	24	19	0.27	122
HZ05021V0	HZ05021E0	3/8	7.6	-	3/8-19	-	1	2.32	1.34	1.10	0.90	59	34	28	23	0.43	197
HZ05221V0	HZ05221E0	3/8	7.6	3/8-18	-	-	1	2.32	1.34	1.10	0.90	59	34	28	23	0.43	197
HZ05031V0	HZ05031E0	1/2	10.3	-	1/2-14	-	1	2.71	1.50	1.22	1.06	69	38	31	27	0.50	226
HZ05231V0	HZ05231E0	1/2	10.3	1/2-14	-	-	1	2.71	1.50	1.22	1.06	69	38	31	27	0.50	226
HZ05041V0	HZ05041E0	3/4	14.2	-	3/4-14	-	1	3.50	1.89	1.57	1.38	89	48	40	35	1.27	577
HZ05241V0	HZ05241E0	3/4	14.2	3/4-14	-	-	1	3.50	1.89	1.57	1.38	89	48	40	35	1.27	577
HZ05051V0	HZ05051E0	1	16.5	-	1-11	-	1	3.89	2.05	1.77	1.61	99	52	45	41	1.59	720
HZ05251V0	HZ05251E0	1	16.5	1-11 1/2	-	-	1	3.89	2.05	1.77	1.61	99	52	45	41	1.59	720
HZ05061V0	HZ05061E0	1 1/4	20.5	-	1 1/4-11	-	1	5.20	2.95	2.44	2.16	132	75	62	55	4.77	2,165
HZ05071V0	HZ05071E0	1 1/2	25.8	-	1 1/2-11	-	1	5.90	3.35	2.95	2.56	150	85	75	65	7.72	3,500
HZ05091V0	HZ05091E0	2	34.7	-	2-11	-	1	6.69	3.82	3.35	2.95	170	97	85	75	10.67	4,840

* Alternative end connections available upon request.

To obtain connected length of coupling add dimensions A (Fig. 1) and J (Fig. 3) together.

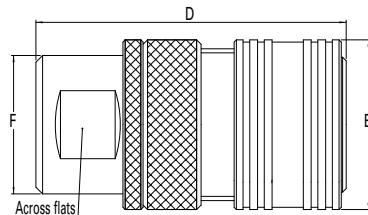


Figure 2

Sockets with Sleeve Lock (Female)

Part Number	FKM	EPDM	Body Size (in)	Nominal Flow Diameter (mm)	BSPP	Thread Size* (Female)	Dimensions							Weight	
							D (in)	E (in)	F (in)	Across flats (in)	D (mm)	E (mm)	F (mm)	Across flats (mm)	lbs
HZ05003V0	HZ05003E0	1/8	3.8	1/8-28	2	1.65	0.94	0.83	0.63	42	24	21	16	0.19	91
HZ05013V0	HZ05013E0	1/4	5.7	1/4-19	2	1.97	1.10	0.94	0.75	50	28	24	19	0.27	134
HZ05023V0	HZ05023E0	3/8	7.6	3/8-19	2	2.32	1.34	1.10	0.90	59	34	28	23	0.43	225
HZ05033V0	HZ05033E0	1/2	10.3	1/2-14	2	2.71	1.50	1.22	1.06	69	38	31	27	0.50	310
HZ05043V0	HZ05043E0	3/4	14.2	3/4-14	2	3.50	1.89	1.57	1.38	89	48	40	35	1.27	665
HZ05053V0	HZ05053E0	1	16.5	1-11	2	3.89	2.05	1.77	1.61	99	52	45	41	1.59	813
HZ05063V0	HZ05063E0	1 1/4	20.5	1 1/4-11	2	5.20	2.95	2.44	2.16	132	75	62	55	4.77	2,230
HZ05073V0	HZ05073E0	1 1/2	25.8	1 1/2-11	2	5.90	3.35	2.95	2.56	150	85	75	65	7.72	3,585
HZ05093V0	HZ05093E0	2	34.7	2-11	2	6.69	3.82	3.35	2.95	170	97	85	75	10.67	5,658

* Alternative end connections available upon request.

To obtain connected length of coupling add dimensions D (Fig. 2) and J (Fig. 3) together.

H5000 Series (Stainless Steel)

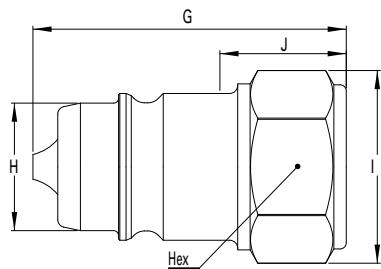


Figure 3

Plugs (Male)

Part Number	Body Size	Nominal Flow Diameter	Thread Size* (Female)			Fig.	Dimensions						Weight					
			NPT	BSPP			G (in)	H (in)	I (in)	J (in)	Hex (in)	G (mm)	H (mm)	I (mm)	J (mm)	Hex (mm)	lbs	grams
HZ05002V0	HZ05002E0	1/8	3.8	-	1/8-28	3	1.10	0.43	0.72	0.39	0.63	28	11	18.4	10	16	0.05	23
HZ05202V0	HZ05202E0	1/8	3.8	1/8-27	-	3	1.10	0.43	0.72	0.39	0.63	28	11	18.4	10	16	0.05	23
HZ05012V0	HZ05012E0	1/4	5.7	-	1/4-19	3	1.38	0.56	0.86	0.55	0.75	35	14.2	21.8	14	19	0.08	37
HZ05212V0	HZ05212E0	1/4	5.7	1/4-18	-	3	1.38	0.56	0.86	0.55	0.75	35	14.2	21.8	14	19	0.08	37
HZ05022V0	HZ05022E0	3/8	7.6	-	3/8-19	3	1.65	0.75	1.04	0.70	0.90	42	19	26.4	18	23	0.15	70
HZ05222V0	HZ05222E0	3/8	7.6	3/8-18	-	3	1.65	0.75	1.04	0.70	0.90	42	19	26.4	18	23	0.15	70
HZ05032V0	HZ05032E0	1/2	10.3	-	1/2-14	3	1.97	0.81	1.22	0.94	1.06	50	20.6	31	24	27	0.20	92
HZ05232V0	HZ05232E0	1/2	10.3	1/2-14	-	3	1.97	0.81	1.22	0.94	1.06	50	20.6	31	24	27	0.20	92
HZ05042V0	HZ05042E0	3/4	14.2	-	3/4-14	3	2.48	1.10	1.58	1.10	1.38	63	27.9	40.2	28	35	0.48	217
HZ05242V0	HZ05242E0	3/4	14.2	3/4-14	-	3	2.48	1.10	1.58	1.10	1.38	63	27.9	40.2	28	35	0.48	217
HZ05052V0	HZ05052E0	1	16.5	-	1-11	3	2.79	1.27	1.87	1.22	1.61	71	32.4	47.5	31	41	0.63	287
HZ05252V0	HZ05252E0	1	16.5	1-11 1/2	-	3	2.79	1.27	1.87	1.22	1.61	71	32.4	47.5	31	41	0.63	287
HZ05062V0	HZ05062E0	1 1/4	20.5	-	1 1/4-11	3	3.82	1.85	2.49	1.89	2.16	97	46.9	63.2	48	55	1.98	900
HZ05072V0	HZ05072E0	1 1/2	25.8	-	1 1/2-11	3	4.29	2.20	2.94	2.04	2.56	109	56	74.7	52	65	3.30	1500
HZ05092V0	HZ05092E0	2	34.7	-	2-11	3	4.76	2.56	3.30	1.97	2.95	121	65	84	50	75	4.06	1840

* Alternative end connections available upon request.

To obtain connected length of coupling add dimensions A (Fig. 1) and J (Fig. 3) together for standard version; add Dimensions D (Fig. 2) and J (Fig. 3) together for sleeve lock version

Dust Plugs and Dust Caps

Body Size	Socket Dust Plug Part Number	Plug Dust Cap Part Number
(in)	Anodized Aluminium	Anodized Aluminium
1/8	HD0510100	HD0510200
1/4	HD0511100	HD0511200
3/8	HD0512100	HD0512200
1/2	HD0513100	HD0513200
3/4	HD0514100	HD0514200
1	HD0515100	HD0515200
1 1/4	HD0516100	HD0516200
1 1/2	HD0517100	HD0517200
2	HD0519100	HD0519200

Socket Dust Plug



Plug Dust Cap



FF Series (Steel)

ISO 16028 Interchange



Product Features

- Meets or exceeds the ISO 16028 standard
- Push-to-connect
- Standard sleeve lock prevents accidental disconnection
- Color identification rings available to help prevent crossing of lines
- Standard Material: High resistant carbon steel with zinc trivalent plating and QPQ finish, ROHS compliant
- Standard Seal Material: NBR+AU
- Available seal options: NBR+AU, FKM, EPDM, HNBR (upon request)

Physical Characteristics

ISO Size*	Coupling Size	Maximum Operating Pressure				Minimum Burst Pressure				Fluid Loss	Air Inclusion	Force to Connect	
		Connected	Plug/Male Half	Socket/Female Half	Connected	Plug/Male Half	Socket/Female Half	Rated Flow**	(lpm)				
(mm)	(in)	(bar)	(psi)	(bar)	(psi)	(bar)	(psi)	(bar)	(psi)	(lpm)	(gpm)	ml-cc.	ml-cc.
6.3	1/4	350	5,075	350	5,075	350	5,075	1,400	20,300	1,400	20,300	1,400	20,300
10.0	5/16	350	5,075	350	5,075	350	5,075	1,400	20,300	1,400	20,300	1,400	20,300
12.5	1/2	350	5,075	350	5,075	350	5,075	1,400	20,300	1,400	20,300	1,400	20,300
16.0	5/8	350	5,075	350	5,075	350	5,075	1,400	20,300	1,400	20,300	1,400	20,300
19.0	3/4	350	5,075	350	5,075	350	5,075	1,300	18,850	1,300	18,850	1,400	20,300
25.0	1	350	5,075	350	5,075	350	5,075	1,260	18,270	1,260	18,270	1,260	18,270


* The ISO size corresponds to the internal diameter of the hose or the external diameter of the rigid tube (as defined in ISO 4397 Standard)

** Indicated values refer to a 1 bar/14.5 psi pressure drop

Applications & Markets

- Hydraulic and Fluid Transfer
- Construction equipment
- Agricultural equipment
- Utility vehicles
- On-Highway vehicles
- Stationary in-plant hydraulics and fluid transfer
- Interchangeable with HTMA couplings in the 3/8" size

Flow Data

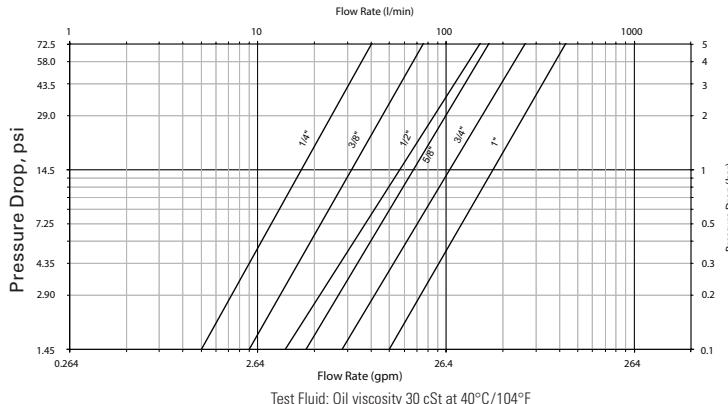

Seal Elastomer Data*

Seal Elastomer	P/N Code	ISO Size (6FF, 10FF, 12FF, 16FF, 19FF and 25FF) Maximum Operation Temperature Range	Non-ISO Size (32FF, 50FF and 50FF) Maximum Operation Temperature Range
NBR (Nitrile) + AU (Polyurethane)		-25°C +100°C/-13°F +212°F	-20°C +100°C/-4°F +212°F
FKM	-143	-20°C +200°C/-4°F +392°F	-15°C +180°C/+5°F +356°F
EPDM (Ethylene-Propylene)	-192	-40°C +150°C/-40°F +302°F	on request
HNBR	-507	-32°C +150°C/-25°F +302°F	on request
Kalrez® 6375	-242	-20°C +275°C/-4°F +527°F	on request
Generic FFKM (Perfluorocarbon)	-503	-15°C +275°C/+5°F +527°F	on request

* For reference only, based on Eaton recommended temperatures.

Contact Eaton technical support for further information on fluid compatibility

FF Series (Steel)

ISO 16028 Interchange

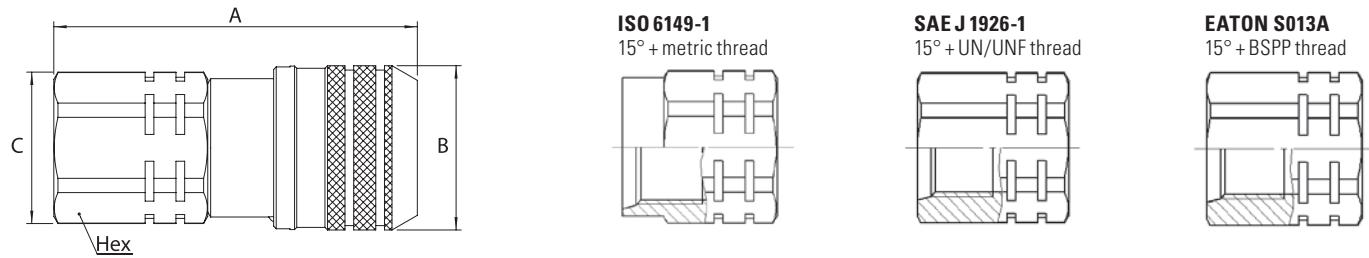


Figure 1

Sockets (Female)

Part Number	Body Size	ISO Size	Nominal Flow Diameter	Thread Size* (Female)						Dimensions						Weight			
				NPT	BSPP	ISO 6149-1	SAE J 1926-1	Eaton S013A	Fig.	A (in)	B (in)	C (in)	Hex (in)	A (mm)	B (mm)	C (mm)	Hex (mm)	lbs	grams
6FFS25	1/4	6.3	6	1/4 18f					1	2.13	1.06	0.94	0.87	54	27	24	22	-	-
6FFS25BS	1/4	6.3	6		1/4-19				1	2.13	1.06	0.94	0.87	54	27	24	22	-	-
6FFS25FG	1/4	6.3	6			G 1/4			1	2.13	1.06	0.94	0.87	54	27	24	22	0.30	135
6FFS56UN	1/4	6.3	6				3/16 18f UNF		1	2.17	1.06	0.94	0.87	55	27	24	22	-	-
10FFS16FMET	3/8	10	8.6			M16x1.5			1	2.67	1.26	1.16	1.06	678	32	29.5	27	-	-
10FFS37	3/8	10	8.6			3/8 18f			1	2.67	1.26	1.16	1.06	678	32	29.5	27	-	-
10FFS37BS	3/8	10	8.6			3/8-19			1	2.67	1.26	1.16	1.06	678	32	29.5	27	-	-
10FFS37FG	3/8	10	8.6				G 3/8		1	2.67	1.26	1.16	1.06	678	32	29.5	27	0.54	244
10FFS50	3/8	10	8.6			1/2 14f			1	2.79	1.26	1.16	1.06	70.8	32	29.5	27	-	-
10FFS50BS	3/8	10	8.6			1/2-14			1	2.79	1.26	1.16	1.06	70.8	32	29.5	27	-	-
10FFS50FG	3/8	10	8.6				G 1/2		1	2.79	1.26	1.16	1.06	70.8	32	29.5	27	0.52	237
10FFS56UN	3/8	10	8.6			3/16 18f UNF			1	2.79	1.26	1.16	1.06	70.8	32	29.5	27	-	-
10FFS75UN	3/8	10	8.6			3/4 16f UNF			1	2.79	1.26	1.16	1.06	70.8	32	29.5	27	-	-
10FFS87UN	3/8	10	8.6			3/4 14f UNF			1	2.91	1.26	1.30	1.18	73.8	32	33	30	-	-
12FFS106UN	1/2	12.5	11			1 1/16 12f UN			1	3.50	1.50	1.56	1.42	89	38.2	39.5	36	-	-
12FFS50	1/2	12.5	11			1/2 14f			1	3.27	1.50	1.56	1.42	83	38.2	39.5	36	-	-
12FFS50BS	1/2	12.5	11			1/2-14			1	3.27	1.50	1.56	1.42	83	38.2	39.5	36	-	-
12FFS50FG	1/2	12.5	11				G 1/2		1	3.27	1.50	1.56	1.42	83	38.2	39.5	36	1.04	472
12FFS75	1/2	12.5	11			3/4 14f			1	3.39	1.50	1.56	1.42	86	38.2	39.5	36	-	-
12FFS75BS	1/2	12.5	11			3/4-14			1	3.39	1.50	1.56	1.42	86	38.2	39.5	36	-	-
12FFS75FG	1/2	12.5	11				G 3/4		1	3.39	1.50	1.56	1.42	86	38.2	39.5	36	1.01	460
12FFS75UN	1/2	12.5	11			3/4 16f UNF			1	3.27	1.50	1.56	1.42	83	38.2	39.5	36	-	-
12FFS87UN	1/2	12.5	11			3/4 14f UNF			1	3.39	1.50	1.56	1.42	86	38.2	39.5	36	-	-
16FFS106UN	3/8	16	13			1 1/16 12f UN			1	3.50	1.66	1.56	1.42	89	42.2	39.5	36	-	-
16FFS50	3/8	16	13			1/2 14f			1	3.27	1.66	1.56	1.42	83	42.2	39.5	36	-	-
16FFS50BS	3/8	16	13			1/2-14			1	3.27	1.66	1.56	1.42	83	42.2	39.5	36	-	-
16FFS75	3/8	16	13			3/4 14f			1	3.39	1.66	1.56	1.42	86	42.2	39.5	36	-	-
16FFS75BS	3/8	16	13			3/4-14			1	3.39	1.66	1.56	1.42	86	42.2	39.5	36	-	-
16FFS75FG	3/8	16	13				G 3/4		1	3.39	1.66	1.56	1.42	86	42.2	39.5	36	1.20	548
16FFS75UN	3/8	16	13			3/4 16f UNF			1	3.27	1.66	1.56	1.42	83	42.2	39.5	36	-	-
16FFS87UN	3/8	16	13			3/4 14f UNF			1	3.39	1.66	1.56	1.42	86	42.2	39.5	36	-	-
19FFS100	3/4	19	15			1 11,5f			1	3.80	1.82	1.81	1.65	96.6	46.2	46	42	-	-
19FFS100BS	3/4	19	15			1-11			1	3.80	1.82	1.81	1.65	96.6	46.2	46	42	-	-
19FFS100FG	3/4	19	15				G 1		1	3.80	1.82	1.81	1.65	96.6	46.2	46	42	1.62	737
19FFS106UN	3/4	19	15			1 1/16 12f UN			1	3.80	1.82	1.81	1.65	96.6	46.2	46	42	-	-
19FFS131UN	3/4	19	15			1 1/16 12f UN			1	3.80	1.82	1.81	1.65	96.6	46.2	46	42	-	-
19FFS75	3/4	19	15			3/4 14f			1	3.80	1.82	1.81	1.65	96.6	46.2	46	42	-	-
19FFS75BS	3/4	19	15			3/4-14			1	3.80	1.82	1.81	1.65	96.6	46.2	46	42	-	-
25FFS100	1	25	18			1 11,5f			1	4.07	2.17	2.36	2.17	103.5	55.2	60	55	-	-
25FFS100BS	1	25	18			1-11			1	4.07	2.17	2.36	2.17	103.5	55.2	60	55	-	-
25FFS125	1	25	18			1 1/4 11,5f			1	4.07	2.17	2.36	2.17	103.5	55.2	60	55	-	-
25FFS125BS	1	25	18			1 1/4-11			1	4.07	2.17	2.36	2.17	103.5	55.2	60	55	-	-
25FFS125FG	1	25	18				G 1 1/4		1	4.07	2.17	2.36	2.17	103.5	55.2	60	55	2.74	1246
25FFS131UN	1	25	18			1 5/16 12f UN			1	4.07	2.17	2.36	2.17	103.5	55.2	60	55	2.77	126
25FFS162UN	1	25	18			1 1/8 12f UN			1	4.07	2.17	2.36	2.17	103.5	55.2	60	55	-	-

* Alternative end connections available upon request.

To obtain connected length of coupling, add dimensions A (Fig. 1 or Fig. 2) and G (Fig. 3 or 4) together.

FF Series (Steel) ISO 16028 Interchange



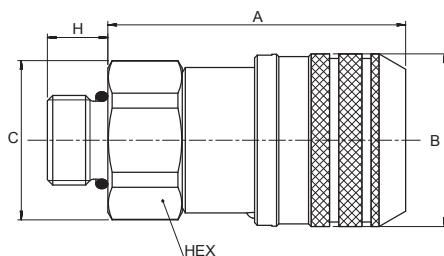


Figure 2


ISO 8434-1
Metric thread



ISO 8434-1 + Bulkhead
Metric thread



SAE J1926-2
UN/UNF thread



Sockets (Female)


Part Number	Body Size	ISO Size	Nominal Flow Diameter	Thread Size*(Male)	Fig.	Dimensions									Weight		
						A (in.)	B (in.)	C (in.)	H (in.)	Hex (in.)	A (mm)	B (mm)	C (mm)	H (mm)	Hex (mm)	lbs	grams
6FFS10LBH	1/4	6.3	6	10L - M16x1,5 + bulkhead	2	1.65	1.06	0.94	1.38	0.87	42	27	24	35	22	—	—
10FFS8L	5/8	10	6	8L - M14x1,5	2	2.18	1.26	1.16	0.39	1.06	55.3	32	29.5	10	27	0.44	200
10FFS10L	5/8	10	8	10L - M16x1,5	2	2.18	1.26	1.16	0.43	1.06	55.3	32	29.5	11	27	0.45	204
10FFS12L	5/8	10	10	12L - M18x1,5	2	2.12	1.26	1.16	0.43	1.06	53.8	32	29.5	11	27	—	—
10FFS15L	5/8	10	8,6	15L - M22x1,5	2	2.08	1.26	1.16	0.47	1.06	52.8	32	29.5	12	27	—	—
10FFS15LBH	5/8	10	8,6	15L - M22x1,5	2	3.24	1.26	1.16	1.50	1.06	82.3	32	29.5	38	27	0.49	225
10FFS16S	5/8	10	8,6	16S - M24x1,5 + bulkhead	2	2.26	1.26	1.16	0.55	1.06	57.3	32	29.5	14	27	0.46	211
10FFS56ORM	5/8	10	8,6	5/8 18f UNF	2	2.61	1.26	1.06	0.47	0.94	66.4	32	27	12	23.8	—	—
10FFS75ORM	5/8	10	8,6	3/4 16f UNF	2	2.61	1.26	1.06	0.55	0.94	66.4	32	27	14	23.8	—	—
12FFS15LBH	1/2	12	11	15L - M22x1,5 + bulkhead	2	3.66	1.50	1.56	1.50	1.42	93	38.2	39.5	38	36	1.05	478
12FFS16S	1/2	12	11	16S - M24x1,5	2	2.75	1.50	1.56	0.55	1.42	70	38.2	39.5	14	36	1.01	460
12FFS18LBH	1/2	12	11	18L - M26x1,5 + bulkhead	2	3.74	1.50	1.56	1.57	1.42	95	38.2	39.5	40	36	1.17	534
16FFS15LBH	5/8	16	12	15L - M22x1,5 + bulkhead	2	2.68	1.66	1.56	1.50	1.42	68	42.2	39.5	38	36	—	—
16FFS16S	5/8	16	12	16S - M24x1,5	2	2.75	1.66	1.56	0.55	1.42	70	42.2	39.5	14	36	1.11	505
16FFS18LBH	5/8	16	13	18L - M26x1,5 + bulkhead	2	2.68	1.66	1.56	1.57	1.42	68	42.2	39.5	40	36	—	—

* Alternative end connections available upon request.


To obtain connected length of coupling, add dimensions A (Fig. 1 or Fig. 2) and G (Fig. 3 or 4) together.

Note that ISO 8434-1 will restrict usage of coupling to 250 bar for end connection 8L, 10L, 12L and 15L, and to 160 bar for end connection 18L.


FF Series (Steel) ISO 16028 Interchange

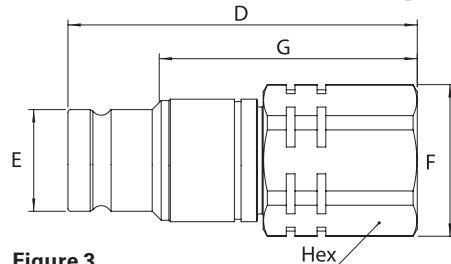


ISO 6149-1
15° + Metric thread



SAE J 1926-1
15° + UN/UNF thread



EATON S013A
15° + BSPP Thread



Plugs (Male)

Part Number	Body Size	ISO Size	Nominal Flow Diameter	Thread Size*(Female)				Dimensions								Weight					
				NPT	BSPP	ISO 6149-1	SAE J 1926-1	Eaton S013A	Fig.	D (in)	E (in)	F (in)	G (in)	Hex (in)	D (mm)	E (mm)	F (mm)	G (mm)	Hex (mm)	Ibs	grams
6FFP2AU	1/4	6.3	6	1/4 18f					3	2.01	0.64	0.94	1.58	0.87	51	16.2	24	40.1	22	—	—
6FFP25BS	1/4	6.3	6		1/4-19				3	2.01	0.64	0.94	1.58	0.87	51	16.2	24	40.1	22	—	—
6FFP25FG	1/4	6.3	6			G 1/4			3	2.01	0.64	0.94	1.58	0.87	51	16.2	24	40.1	22	0.20	90
6FFP56UN	1/4	6.3	6			1/16 18f UNF			3	2.05	0.64	0.94	1.62	0.87	52	16.2	24	41.1	22	—	—
10FFP16FMET	5/8	10	8.6			M16x1.5			3	2.56	0.78	1.16	1.96	1.06	65	19.7	29.5	49.7	27	—	—
10FFP37	5/8	10	8.6	5/8 18f					3	2.56	0.78	1.16	1.96	1.06	65	19.7	29.5	49.7	27	—	—
10FFP37BS	5/8	10	8.6		5/8-19				3	2.56	0.78	1.16	1.96	1.06	65	19.7	29.5	49.7	27	—	—
10FFP37FG	5/8	10	8.6			G 5/8			3	2.56	0.78	1.16	1.96	1.06	65	19.7	29.5	49.7	27	0.33	152
10FFP60	5/8	10	8.6	1/2 14f					3	2.68	0.78	1.16	2.08	1.06	68	19.7	29.5	52.7	27	—	—
10FFP50BS	5/8	10	8.6		1/2-14				3	2.68	0.78	1.16	2.08	1.06	68	19.7	29.5	52.7	27	—	—
10FFP50FG	5/8	10	8.6			G 1/2			3	2.68	0.78	1.16	2.08	1.06	68	19.7	29.5	52.7	27	0.32	144
10FFP56UN	5/8	10	8.6			1/16 18f UNF			3	2.68	0.78	1.16	2.08	1.06	68	19.7	29.5	52.7	27	—	—
10FFP75UN	5/8	10	8.6			3/4 16f UNF			3	2.68	0.78	1.16	2.08	1.06	68	19.7	29.5	52.7	27	—	—
10FFP87UN	5/8	10	8.6			7/16 14f UNF			3	2.80	0.78	1.30	2.19	1.18	71	19.7	33	55.7	30	—	—
12FFP106UN	1/2	12.5	11			1 1/16 12f UN			3	2.95	0.96	1.56	2.28	1.42	75	24.5	39.5	55.8	36	—	—
12FFP50	1/2	12.5	11	1/2 14f					3	2.71	0.96	1.56	2.05	1.42	69	24.5	39.5	52	36	—	—
12FFP50BS	1/2	12.5	11		1/2-14				3	2.71	0.96	1.56	2.05	1.42	69	24.5	39.5	52	36	—	—
12FFP50FG	1/2	12.5	11			G 1/2			3	2.71	0.96	1.56	2.05	1.42	69	24.5	39.5	52	36	0.64	290
12FFP75	1/2	12.5	11	3/4 14f					3	2.83	0.96	1.56	2.16	1.42	72	24.5	39.5	55	36	—	—
12FFP75BS	1/2	12.5	11		3/4-14				3	2.83	0.96	1.56	2.16	1.42	72	24.5	39.5	55	36	—	—
12FFP75FG	1/2	12.5	11			G 3/4			3	2.83	0.96	1.56	2.16	1.42	72	24.5	39.5	55	36	0.61	279
12FFP75UN	1/2	12.5	11			3/4 16f UNF			3	2.71	0.96	1.56	2.05	1.42	69	24.5	39.5	52	36	—	—
12FFP87UN	1/2	12.5	11			7/8 14f UNF			3	2.83	0.96	1.56	2.16	1.42	72	24.5	39.5	55	36	—	—
16FFP106UN	5/8	16	13			1 1/16 12f UN			3	2.95	1.06	1.56	2.28	1.42	75	27	39.5	58	36	—	—
16FFP50	5/8	16	13	1/2 14f					3	2.71	1.06	1.56	2.05	1.42	69	27	39.5	52	36	—	—
16FFP50BS	5/8	16	13		1/2-14				3	2.71	1.06	1.56	2.05	1.42	69	27	39.5	52	36	—	—
16FFP75	5/8	16	13	3/4 14f					3	2.83	1.06	1.56	2.16	1.42	72	27	39.5	55	36	—	—
16FFP75BS	5/8	16	13		3/4-14				3	2.83	1.06	1.56	2.16	1.42	72	27	39.5	55	36	—	—
16FFP75FG	5/8	16	13			G 3/4			3	2.83	1.06	1.56	2.16	1.42	72	27	39.5	55	36	0.7	317
16FFP75UN	5/8	16	13			3/4 16f UNF			3	2.71	1.06	1.56	2.05	1.42	69	27	39.5	52	36	—	—
16FFP87UN	5/8	16	13			7/8 14f UNF			3	2.83	1.06	1.56	2.16	1.42	72	27	39.5	55	36	—	—
19FFP100	3/4	19	15	1 11,5f					3	3.69	1.18	1.81	2.84	1.65	93.8	29.9	46	72	42	—	—
19FFP100BS	3/4	19	15	1-11					3	3.69	1.18	1.81	2.84	1.65	93.8	29.9	46	72	42	—	—
19FFP100FG	3/4	19	15			G 1			3	3.69	1.18	1.81	2.84	1.65	93.8	29.9	46	72	42	1.14	518
19FFP106UN	3/4	19	15			1 1/16 12f UN			3	3.69	1.18	1.81	2.84	1.65	93.8	29.9	46	72	42	—	—
19FFP131UN	3/4	19	15			1 5/16 12f UN			3	3.69	1.18	1.81	2.84	1.65	93.8	29.9	46	72	42	—	—
19FFP75	3/4	19	15	3/4 14f					3	3.69	1.18	1.81	2.84	1.65	93.8	29.9	46	72	42	—	—
19FFP75BS	3/4	19	15		3/4-14				3	3.69	1.18	1.81	2.84	1.65	93.8	29.9	46	72	42	—	—
25FFP100	1	25	18	1 11,5f					3	4.12	1.42	2.36	3.22	2.17	104.6	36	60	81.7	55	—	—
25FFP100BS	1	25	18	1-11					3	4.12	1.42	2.36	3.22	2.17	104.6	36	60	81.7	55	—	—
25FFP125	1	25	18	1 1/4 11,5f					3	4.12	1.42	2.36	3.22	2.17	104.6	36	60	81.7	55	—	—
25FFP125BS	1	25	18	1 1/4-11					3	4.12	1.42	2.36	3.22	2.17	104.6	36	60	81.7	55	—	—
25FFP125FG	1	25	18			G 1 1/4			3	4.12	1.42	2.36	3.22	2.17	104.6	36	60	81.7	55	2.08	948
25FFP131UN	1	25	18			1 1/16 12f UN			3	4.12	1.42	2.36	3.22	2.17	104.6	36	60	81.7	55	2.09	952
25FFP162UN	1	25	18			1 1/8 12f UN			3	4.12	1.42	2.36	3.22	2.17	104.6	36	60	81.7	55	—	—

*Alternative end connections available upon request.

To obtain connected length of coupling, add dimensions A (Fig. 1 or Fig. 2) and G (Fig. 3 or 4) together.

FF Series (Steel) ISO 16028 Interchange



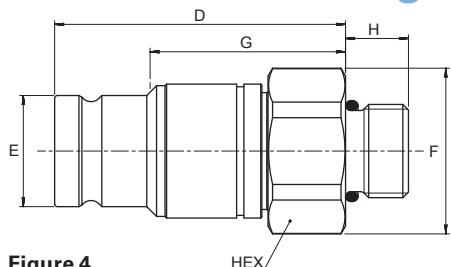


Figure 4


ISO 8434-1
Metric thread



ISO 8434-1 + Bulkhead
Metric thread



SAE J1926-2
UN/UNF thread



Plugs (Male)

Part Number	Body Size	ISO Size	Nominal Flow Diameter	Thread Size*(Male)	Fig.	Dimensions										Weight				
						D (in)	E (in)	F (in)	G (in.)	H (in.)	Hex (in.)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	Hex (mm)	lbs	grams	
NBR+AU	(in)	(mm)	(mm)	ISO 8434-1	SAE J 1926-2	Fig.														
6FFP10LBH	1/4	6.3	6	M10L-16x1,5 + bulkhead		4	1.54	0.64	0.94	1.11	1.38	0.87	39	16.2	24	28.1	35	22	0.27	123
10FFP8L	5/8	10	6	8L-M14x1,5		4	2.44	0.78	1.16	1.84	0.39	1.06	62	19.7	29.5	46.7	10	27	0.25	112
10FFP10L	5/8	10	8	10L-M16x1,5		4	2.44	0.78	1.16	1.84	0.43	1.06	62	19.7	29.5	46.7	11	27	0.25	116
10FFP12L	5/8	10	10	12L-M18x1,5		4	2.01	0.78	1.16	1.41	0.43	1.06	51	19.7	29.5	35.7	11	27	0.26	117
10FFP15L	5/8	10	8,6	5L-M22x1,5		4	2.44	0.78	1.16	1.84	0.47	1.06	62	19.7	29.5	46.7	12	27	0.27	123
10FFP15LBH	5/8	10	8,6	15L-M22x1,5 + bulkhead		4	3.5	0.78	1.16	2.9	1.50	1.06	89	19.7	29.5	73.7	38	27	0.30	137
10FFP16S	5/8	10	8,6	16S-M24x1,5		4	2.52	0.78	1.16	1.92	0.55	1.06	64	19.7	29.5	48.7	14	27	0.27	123
10FFP56ORM	5/8	10	8,6		%6 18f UNF	4	2.5	0.78	1.06	1.9	0.47	0.94	63.6	19.7	27	48.3	12	23.8	0.33	150
10FFP75ORM	5/8	10	8,6		%4 16f UNF	4	2.	0.78	1.06	1.	0.55	0.94	63.6	19.7	27	48.3	14	23.8	0.34	156
12FFP15LBH	1/2	12	11	15L-M22x1,5 + bulkhead		4	3.62	0.96	1.56	2.95	1	1.42	92	24.5	39.5	75	38	36	0.65	297
12FFP16S	1/2	12	11	16S-M24x1,5		4	2.71	0.96	1.56	2.05	0.55	1.42	69	24.5	39.5	52	14	36	0.61	279
12FFP18LBH	1/2	12	11	18L-M26x1,5 + bulkhead		4	3.70	0.96	1.56	3.03	1.57	1.42	94	24.5	39.5	77	40	36	0.78	353
16FFP15LBH	5/8	16	12	15L-M22x1,5 + bulkhead		4	2.12	1.06	1.56	1.45	1.5	1.42	54	27	39.5	37	38	36	0.65	298
16FFP16S	5/8	16	12	16S-M24x1,5		4	2.71	1.06	1.56	2.05	0.55	1.42	69	27	39.5	52	14	36	0.62	280
16FFP18LBH	5/8	16	13	18L-M26x1,5 + bulkhead		4	2.12	1.06	1.56	1.45	1.57	1.42	54	27	39.5	37	40	36	0.78	353

*Alternative end connections available upon request.

To obtain connected length of coupling, add dimensions A (Fig. 1 or Fig. 2) and G (Fig. 3 or 4) together.

Note that ISO 8434-1 will restrict usage of coupling to 250 bar for end connection 8L, 10L, 12L and 15L, and to 160 bar for end connection 18L.

Socket (Female) Dust Plug

Body Size (in)	Body Size (in) with color ring	Part Number	Coupling Type	Dust Plug Material
1/4	-	SDC6FF	Socket/Female	PVC
5/8*	-	SDC10FF	Socket/Female	PVC
1/2	5/8	SDC12FF	Socket/Female	PVC
5/8	-	SDC16FF	Socket/Female	PVC
3/4	1/2	SDC19FF	Socket/Female	PVC
1	5/4	SDC25FF	Socket/Female	PVC

*Dust caps and dust plugs are offered in black.



Plug (Male) Dust Cap

Body Size (in)	Part Number	Coupling Type	Dust Plug Material
1/4	PDC6FF	Plug/Male	PVC
5/8*	PDC10FF	Plug/Male	PVC
1/2	PDC12FF	Plug/Male	PVC
5/8	PDC16FF	Plug/Male	PVC
3/4	PDC19FF	Plug/Male	PVC
1	PDC25FF	Plug/Male	PVC



Color Coding Ring Option*

Body Size (in)	ISO Size (mm)	Size	Socket/Female Ring Part Number** Blue	Red	Yellow	Green	Plug/Male Ring Part Number** Blue	Red	Yellow	Green	Tool Part Number	Tool & Rings Kit Part Number***
5/8	10	10FF	CR10FFSLB	CR10FFSRD	CR10FFSYL	CR10FFSDG	CR10FFPLB	CR10FFPRD	CR10FFPYL	CR10FFPDG	CR10FFSP93	CRKIT10FF
1/2	12.5	12FF	CR12FFSLB	CR12FFSRD	CR12FFSYL	CR12FFSDG	CR12FFPLB	CR12FFPRD	CR12FFPYL	CR12FFPDG	CR12FFSP93	CRKIT12FF
5/8	16	16FF	CR16FFSLB	CR16FFSRD	CR16FFSYL	CR16FFSDG	CR16FFPLB	CR16FFPRD	CR16FFPYL	CR16FFPDG	CR16FFSP93	CRKIT16FF
3/4	19	19FF	CR19FFSLB	CR19FFSRD	CR19FFSYL	CR19FFSDG	CR19FFPLB	CR19FFPRD	CR19FFPYL	CR19FFPDG	CR19FFSP93	CRKIT19FF

* For requests on alternative colors or installation instructions, please contact your Eaton sales representative.

** Orders must be in multiples of 10 pcs.

*** The kit consists of a tool plus 10 socket rings and 10 plug rings of each color.

MLFF Series (Stainless Steel) ISO 16028 Flat Face/Dry Break



Eaton's MLFF Series stainless steel coupling is a flat face dry break coupling used for hydraulic applications. The MLFF Series interchanges with all ISO 16028 profiles. Due to its stainless steel design, it is corrosion resistant and can handle aggressive environments.

Product Features

- Designed and manufactured under Article 3.3 of the European Pressure Equipment Directive (PED) 97/23 EC
- Safety sleeve lock prevents accidental disconnections
- Push to connect with double shut-off valving
- Shock resistant color coding ring option available in sizes 10FF, 12FF, 16FF and 25FF to prevent accidental crossing of lines
- Resistant to aggressive environments and corrosion
- Utilize FF Series dust caps
- Standard body material: 316L Stainless steel corrosion resistant
- Alternative end connections available upon request
- Standard seal material: FKM, EPDM, NBR+AU, HNBR (upon request)

Physical Characteristics


ISO Size* (mm)	Coupling Size (in)	Maximum Operating Pressure				Minimum Burst Pressure				Rated Flow** (lpm)	Fluid Loss ml-cc.	Air Inclusion ml-cc.	Force to Connect N	Force to Connect Lbs					
		Connected (bar)	Connected (psi)	Plug/ Male Half (bar)	Plug/ Male Half (psi)	Socket/ Female Half (bar)	Socket/ Female Half (psi)	Connected (bar)	Connected (psi)	Plug/ Male Half (bar)	Plug/ Male Half (psi)	Socket/ Female Half (bar)	Socket/ Female Half (psi)						
6.3	1/4	250	3,625	250	3,625	250	3,625	2,335	33,858	1,640	23,780	1,330	19,285	17	4.49	0.004	0.007	80	18.0
10	5/16	250	3,625	250	3,625	250	3,625	1,672	24,244	1,664	24,128	845	12,253	29	7.66	0.006	0.010	140	31.5
12	1/2	250	3,625	250	3,625	250	3,625	1,679	24,346	997	14,457	993	14,399	55	14.53	0.012	0.013	195	43.8
16	5/8	250	3,625	250	3,625	250	3,625	1,190	17,255	950	13,775	880	12,760	67	17.70	0.016	0.030	205	46.1
19	3/4	250	3,625	250	3,625	250	3,625	1,370	19,865	882	12,789	845	12,253	105	27.74	0.034	0.015	215	48.3
25	1	250	3,625	250	3,625	250	3,625	1,690	24,505	1,000	14,500	850	12,325	177	46.76	0.032	0.033	260	58.5
-	1 1/2	230	3,335	230	3,335	80	1,160	800	11,600	700	10,150	320	4,640	270	71.32	0.050	-	580	130.4
-	2	150	2,175	150	2,175	70	1,015	600	8,700	600	8,700	280	4,060	420	110.96	0.100	-	490	110.2

* The ISO size corresponds to the internal diameter of the hose or the external diameter of the rigid tube (as defined in ISO 4397 Standard)

** Indicated values refer to a 1 bar/14.5 psi pressure drop

Applications & Markets

- Construction
- Agriculture
- Iron and Steel Industry
- Railway
- Oil and Gas
- Marine
- Material Handling
- General Hydraulic applications

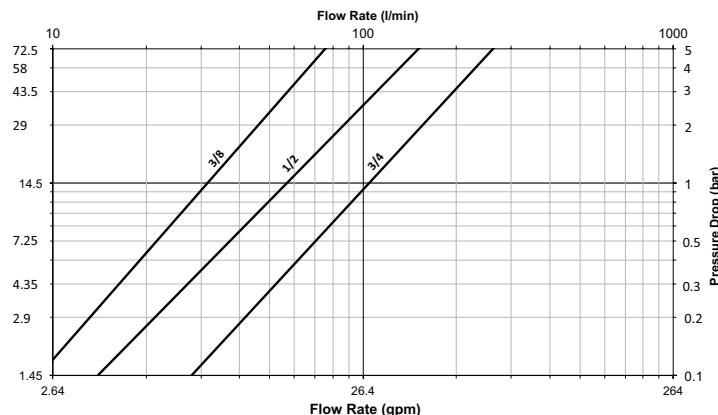

Test Fluid: Oil viscosity 30 cSt at 40°C/104°F


Seal Elastomer Data*

Seal Elastomer	P/N Code	ISO Size (6FF to 25FF) Maximum Operation Temperature Range	Non-ISO Size (40FF and 50FF) Maximum Operation Temperature Range
NBR (Nitrile) + AU (Polyurethane)	-	-25°C +100°C/-13°F +212°F	on request
FKM	-143	-20°C +200°C/-4°F +392°F	-15°C +180°C/+5°F +356°F
EPDM (Ethylene-Propylene)	-192	-40°C +150°C/-40°F +302°F	on request

*For reference only, based on Eaton recommended temperatures.
Contact Eaton technical support for further information on fluid compatibility.

MLFF Series (Stainless Steel)

ISO 16028 Flat Face/Dry Break

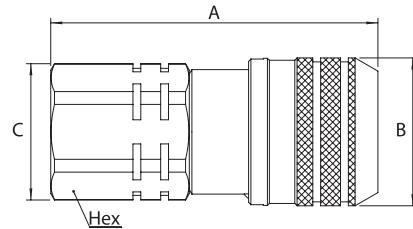


Sockets (Female)

Part Number	Body Size	ISO Size	Nominal Flow Diameter	Thread Size*(Female)		Dimensions							Weight					
				NPT	BSPP	Fig.	A (in)	B (in)	C (in)	Hex (in)	A (mm)	B (mm)	C (mm)	Hex (mm)	lbs	grams		
ML6FFS25	ML6FFS25143	ML6FFS25192	1/4	6.3	6	1/4-18	-	1	2.13	1.06	0.94	0.87	54	27	24	22	0.30	135
ML6FFS25BS	ML6FFS25BS143	ML6FFS25BS192	1/4	6.3	6	-	1/4-19	1	2.13	1.06	0.94	0.87	54	27	24	22	0.30	135
ML10FFS37	ML10FFS37143	ML10FFS37192	3/8	10	8.6	3/8-18	-	1	2.68	1.26	1.16	1.06	68	32	29.5	27	0.54	245
ML10FFS37BS	ML10FFS37BS143	ML10FFS37BS192	3/8	10	8.6	-	3/8-19	1	2.68	1.26	1.16	1.06	68	32	29.5	27	0.54	245
ML10FFS50BS	ML10FFS50BS143	ML10FFS50BS192	3/8	10	8.6	-	1/2-14	1	2.80	1.26	1.16	1.06	71	32	29.5	27	0.53	240
ML12FFS50	ML12FFS50143	ML12FFS50192	1/2	12.5	11	1/2-14	-	1	3.27	1.50	1.56	1.42	83	38	39.5	36	1.03	470
ML12FFS50BS	ML12FFS50BS143	ML12FFS50BS192	1/2	12.5	11	-	1/2-14	1	3.27	1.50	1.56	1.42	83	38	39.5	36	1.03	470
ML12FFS75BS	ML12FFS75BS143	ML12FFS75BS192	1/2	12.5	11	-	3/4-14	1	3.39	1.50	1.56	1.42	86	38	39.5	36	1.01	460
ML16FFS75	ML16FFS75143	ML16FFS75192	3/8	16	13	3/4-14	-	1	3.39	1.66	1.56	1.42	86	42	39.5	36	1.21	550
ML16FFS75BS	ML16FFS75BS143	ML16FFS75BS192	3/8	16	13	-	3/4-14	1	3.39	1.66	1.56	1.42	86	42	39.5	36	1.21	550
ML19FFS75	ML19FFS75143	ML19FFS75192	3/4	19	15	3/4-14	-	1	3.82	1.81	1.77	1.61	97	46	45	41	1.69	770
ML19FFS75BS	ML19FFS75BS143	ML19FFS75BS192	3/4	19	15	-	3/4-14	1	3.82	1.81	1.77	1.61	97	46	45	41	1.69	770
ML19FFS100	ML19FFS100143	ML19FFS100192	3/4	19	15	1-11.5	-	1	3.80	1.82	1.77	1.61	97	46	45	41	1.56	710
ML19FFS100BS	ML19FFS100BS143	ML19FFS100BS192	3/4	19	15	-	1-11	1	3.82	1.81	1.77	1.61	97	46	45	41	1.56	710
ML25FFS100BS	ML25FFS100BS143	ML25FFS100BS192	1	25	18	-	1-11	1	4.07	2.36	2.36	2.17	104	60	60	55	2.83	1290
ML25FFS125	ML25FFS125143	ML25FFS125192	1	25	18	1-11.5	-	1	4.07	2.36	2.36	2.17	104	60	60	55	2.83	1290
-	ML40FFS150143	-	1 1/2	-	-	1 1/2-11.5	-	1	5.21	3.15	2.83	2.56	132	80	72	65	6.39	2910
-	ML50FFS200143	-	2	-	-	2-11	-	1	6.17	3.94	3.48	3.15	157	100	88.5	80	11.49	5230

* Alternative end connections available upon request.

To obtain connected length of coupling, add dimensions A (Fig. 1) and G (Fig. 2) together.

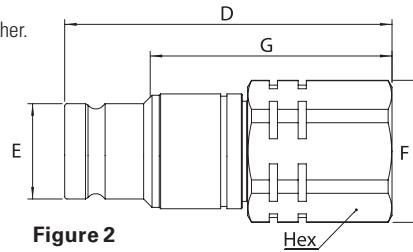

Plugs (Male)

Part Number	Body Size	ISO Size	Nominal Flow Diameter	Thread Size*(Female)		Dimensions							Weight							
				NPT	BSPP	Fig.	D (in)	E (in)	F (in)	G (in)	Hex (in)	D (mm)	E (mm)	F (mm)	G (mm)	lbs	grams			
ML6FFP25	ML6FFP25143	ML6FFP25192	1/4	6.3	6	1/4-18	-	2	2.01	0.46	0.94	1.58	0.87	51	11.6	24	40.1	22	0.20	90
ML6FFP25BS	ML6FFP25BS143	ML6FFP25BS192	1/4	6.3	6	-	1/4-19	2	2.01	0.46	0.94	1.58	0.87	51	11.6	24	40.1	22	0.20	90
ML10FFP37	ML10FFP37143	ML10FFP37192	3/8	10	8.6	3/8-18	-	2	2.56	0.78	1.16	1.97	1.06	65	19.7	29.5	50	27	0.33	150
ML10FFP37BS	ML10FFP37BS143	ML10FFP37BS192	3/8	10	8.6	-	3/8-19	2	2.56	0.78	1.16	1.97	1.06	65	19.7	29.5	50	27	0.33	150
ML10FFP50BS	ML10FFP50BS143	ML10FFP50BS192	3/8	10	8.6	-	1/2-14	2	2.68	0.78	1.16	2.09	1.06	68	19.7	29.5	53	27	0.33	150
ML12FFP50	ML12FFP50143	ML12FFP50192	1/2	12.5	11	1/2-14	-	2	2.72	0.96	1.56	2.05	1.42	69	24.5	39.5	52	36	0.61	275
ML12FFP50BS	ML12FFP50BS143	ML12FFP50BS192	1/2	12.5	11	-	1/2-14	2	2.72	0.96	1.56	2.05	1.42	69	24.5	39.5	52	36	0.64	290
ML12FFP75BS	ML12FFP75BS143	ML12FFP75BS192	1/2	12.5	11	-	3/4-14	2	2.83	0.96	1.56	2.17	1.42	72	24.5	39.5	55	36	0.61	275
ML16FFP75	ML16FFP75143	ML16FFP75192	3/8	16	13	3/4-14	-	2	2.83	1.06	1.56	1.42	1.42	72	27	39.5	36	36	0.69	315
ML16FFP75BS	ML16FFP75BS143	ML16FFP75BS192	3/8	16	13	-	3/4-14	2	2.83	1.06	1.56	1.42	1.42	72	27	39.5	36	36	0.69	315
ML19FFP75	ML19FFP75143	ML19FFP75192	3/4	19	15	3/4-14	-	2	3.70	1.18	1.77	2.83	1.61	94	29.9	45	72	41	1.28	580
ML19FFP75BS	ML19FFP75BS143	ML19FFP75BS192	3/4	19	15	-	3/4-14	2	3.70	1.18	1.77	2.83	1.61	94	29.9	45	72	41	1.28	580
ML19FFP100	ML19FFP100143	ML19FFP100192	3/4	19	15	1-11.5	-	2	3.70	1.18	1.77	2.83	1.61	94	29.9	45	72	41	1.13	515
ML19FFP100BS	ML19FFP100BS143	ML19FFP100BS192	3/4	19	15	-	1-11	2	3.70	1.18	1.77	2.83	1.61	94	29.9	45	72	41	1.12	510
ML25FFP100BS	ML25FFP100BS143	ML25FFP100BS192	1	25	18	-	1-11	2	4.12	1.42	2.36	2.17	2.17	104.6	36	60	55	55	2.37	1080
ML25FFP125	ML25FFP125143	ML25FFP125192	1	25	18	1-11.5	-	2	4.12	1.42	2.36	2.17	2.17	104.6	36	60	55	55	2.37	1080
ML40FFP150143	-	1 1/2	-	-	-	1 1/2-11.5	-	2	4.37	2.25	2.99	2.76	2.76	111	57.1	76	70	41.5	1890	
ML50FFP200143	-	2	-	-	-	2-11	-	2	4.87	2.87	3.29	2.95	2.95	123.8	72.9	83.5	75	5.03	2290	

* For requests on alternative colors or installation instructions, please contact your Eaton sales representative.

** Orders must be in multiples of 10 pcs.

*** The kit consists of a tool plus 10 socket rings and 10 plug rings of each color.

† For dust caps and dust plugs please refer to page 37.



FFCUP Series

ISO 16028 Connect Under Pressure Flat Face Plug/Male



Eaton's FFCUP Series plug/male coupling is an ISO 16028 standard interchange. The flush face design prevents fluid loss on disconnection and air inclusion on connection guaranteeing excellent flow capability. An integrated patented system allows the FFCUP Series plug to be connected to a socket/female half coupling under 350 bar (5075 psi) residual pressure.

Product Features

- Designed and manufactured in accordance with Article 3.3 of the European Pressure Equipment Directive (PED) 97/23 EC
- Meets dimensional requirements of ISO 16028
- Push to connect

- Connect under residual pressure
- Shock resistant color coding ring option available to prevent accidental crossing of lines
- Standard body material: High resistance carbon steel with zinc trivalent plating

- Alternative end connections available upon request
- Standard seal material: NBR (Nitrile) + AU (Polyurethane)
- Utilize FF Series dust caps

Physical Characteristics

Body Size (in)	ISO Size* (mm)	Nominal Flow Diameter (mm)	Max. Operating Pressure (bar)	Max. Operating Pressure (psi)	Min. Burst Pressure (bar)	Min. Burst Pressure (psi)	Rated Flow** (lpm)	Rated Flow** (gpm)	Air Inclusion ml-cc.	Fluid Loss ml-cc.	Force to Connect N	Force to Connect lbf
1/2	10	8.6	350	5,075	1,400	20,300	29.4	7.76	0.010	0.006	350	79

* The ISO size corresponds to the internal diameter of the hose or the external diameter of the rigid tube(as defined in ISO 4397 Standard)


** Indicated values refer to a 1 bar/14.5 psi pressure drop

Connect Under Pressure Operating Guidelines

- The plug can be connected against 350 bar/5075 psi residual pressure to sockets/females meeting ISO 16028 standard requirements.
- Plug only is under pressure while connected.

- During the connection phase, the socket must not be under pressure.
- Disconnection under pressure is strictly forbidden.

- Connection under pressure may require a few seconds: the force to connect must be maintained during this lapse of time.

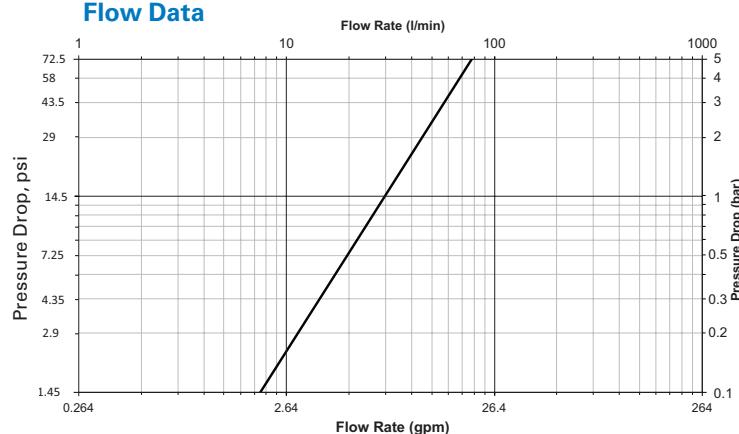

Applications & Markets

- Connection to hydraulic pumps, jacks, distributors and accessories
- Hydraulic circuits
- Material handling
- Construction
- Agriculture
- Iron and steel industry
- Railway
- Industrial plants

Seal Elastomer Data*

Seal Elastomer	Max. Operation Temperature Range
NBR (Nitrile) + AU (Polyurethane)	-25°C +100°C/-13°F +212°F

* For reference only, based on Eaton recommended temperatures.
Contact Eaton technical support for further information on fluid compatibility

FFCUP Series

ISO 16028 Connect Under Pressure Flat Face Plug/Male

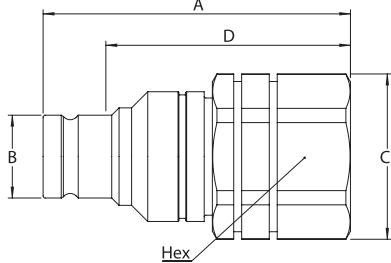


Figure 1

Plugs (Male)

Part Number	Body Size (in)	ISO Size (mm)	Nominal Flow Diameter (mm)	Thread Size* (Female)	Dimensions								Weight				
					NPT	BSPP	Fig.	A (in) 1	B (in) 2.89	C (in) 0.74	D (in) 1.55	Hex (in) 2.28	A (mm) 73.5	B (mm) 18.7	C (mm) 39.5	D (mm) 58.0	Hex lbs 36
10FFPCUP37				3/8-18	-	1	2.89	0.74	1.55	2.28	1.41	73.5	18.7	39.5	58.0	36	0.69 314
10FFPCUP37BS				-	3/8-19	1	2.89	0.74	1.55	2.28	1.41	73.5	18.7	39.5	58.0	36	0.69 314
10FFPCUP50	3/8		10	1/2-14	-	1	2.89	0.74	1.55	2.28	1.41	73.5	18.7	39.5	58.0	36	0.66 300
10FFPCUP50BS				-	1/2-14	1	2.89	0.74	1.55	2.28	1.41	73.5	18.7	39.5	58.0	36	0.66 300

* Alternative end connections available upon request.

Color Coding Ring Option*

Body Size	ISO Size	Nominal Flow Diameter	Plug/Male Ring Part Number**		Yellow	Green	Tool Part Number
			Blue	Red			
(in)	(mm)	(mm)					
3/8	10	8.6	CR12FFPLB	CR12FFPRD	CR12FFPYL	CR12FFPDG	CR12FFSP93

* For requests on alternative colours or installation instructions, please contact your Eaton sales representative.

** Orders must be in multiples of 10 pcs.

FD49 Series

NFPA Standard T3.20.15 HTMA Interchange



Eaton's FD49 Series meets NFPA standard T3.20.15 and was developed in conjunction with HTMA (Hydraulic Tool Manufacturer's Association). Eaton's Twin-Guard™ sealing system prevents weepage at low pressures and allows connection and disconnection against pressure up to 500 psi.

Product Features

- Dual flush face valving for minimal fluid loss and air inclusion
- Tubular valve and sleeve construction for high fluid flow with low pressure drop
- Push-to-connect latching
- for one hand operation
- Standard seal material: Teflon channel seal and Buna-N O-Ring backup
- Standard body material:

High resistance carbon steel with zinc trivalent plating

Physical Characteristics

Body Size (in)	Max. Operating Pressure (bar)	Max. Operating Pressure (psi)	Min. Burst Pressure Connected (bar)	Min. Burst Pressure Connected (psi)	Vacuum Connected Only (in./Hg)	Rated Flow (lpm)	Rated Flow (gpm)	Air Inclusion cc. max.	Fluid Loss cc.max.
3/8	207	3,000	621	9,000	28	38	10	.01	.02




Eaton's Twin-Guard™ seal system consists of channel and Buna-N O-Ring seals. The channel seal prevents blowout during connection and disconnection under pressure to 500 psi. The Buna-N O-Ring seal is a secondary seal eliminating fluid weepage.

Applications & Markets

- Hydraulic tool (HTMA interchange)
- Hydraulic and fluid transfer

Flow Data

Pressure Drop Versus Flow Graph

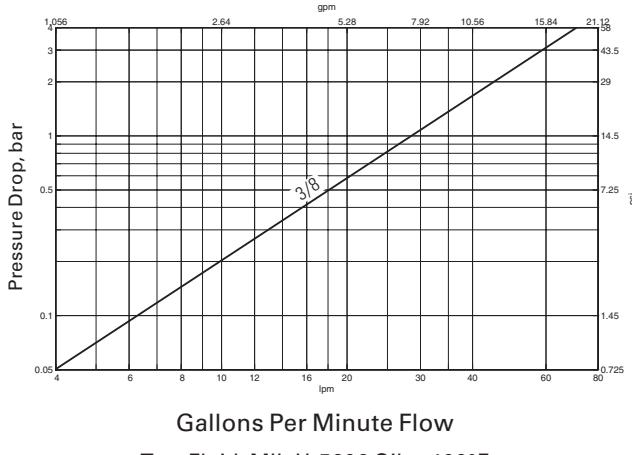

FD49 Series

NFPA Standard T3.20.15 HTMA Interchange




Figure 1




Figure 2




Figure 3




Figure 4

Dimensions (Female NPT, Valved)

Part Number Buna-N	Coupling Type	Body Size	Port Size	Thread	Type	Fig.	Dimensions		Hex ①	Hex ②
							A	B		
FD49-1002-06-06	Plug/Male	3/8	3/8	3/8-18	Female NPT	1	66.5	(2.62)	-	-
FD49-1001-06-06	Socket/Female	3/8	3/8	3/8-18	Female NPT	2	69.6	(2.74)	30.5	(1.20) 25.4 (1.00) 26.9 (1.06)
FD49-1002-08-06	Plug/Male	3/8	1/2	1/2-14	Female NPT	1	69.9	(2.75)	-	-
FD49-1001-08-06	Socket/Female	3/8	1/2	1/2-14	Female NPT	2	72.4	(2.85)	30.5	(1.20) 26.9 (1.06) -

Dimensions (Female SAE O-Ring, Valved)

Part Number Buna-N	Coupling Type	Body Size	Port Size	Thread	Type	Fig.	Dimensions		Hex ①	Hex ②
							A	B		
FD49-1004-08-06	Plug/Male	3/8	3/4	3/4-16	Female SAE O-Ring	1	69.9	(2.75)	-	-
FD49-1005-08-06	Socket/Female	3/8	3/4	3/4-16	Female SAE O-Ring	2	71.6	(2.82)	30.5	(1.20) 26.9 (1.06) -

Dimensions (Male SAE O-Ring, Valved)

Part Number Buna-N	Coupling Type	Body Size	Port Size	Thread	Type	Fig.	Dimensions		Hex ①	Hex ②
							A	B		
FD49-1057-06-06	Plug/Male	3/8	9/16	9/16-18	Male SAE O-Ring	3	75.9	(2.99)	-	-
FD49-1014-06-06	Socket/Female	3/8	9/16	9/16-18	Male SAE O-Ring	4	81.8	(3.22)	30.5	(1.20) 25.4 (1.00) 26.9 (1.06)
FD49-1057-08-06	Plug/Male	3/8	3/4	3/4-16	Male SAE O-Ring	3	75.9	(2.99)	-	-
FD49-1014-08-06	Socket/Female	3/8	3/4	3/4-16	Male SAE O-Ring	4	83.3	(3.28)	30.5	(1.20) 25.4 (1.00) 26.9 (1.06)

Dust Cap/Plug, Standard Coupling

Part Number (Buna-N)	Body Size
FD49-1042-06	3/8

Note: Fits male and female halves.



Dust Cap/Plug

FD96 Series

High Pressure Thread to Connect Flush Face



Eaton's FD96 High Pressure Thread Together Flush Face Series is designed for high pressure and high impulse applications for hydraulic circuits. The FD96 Series design provides low connect and disconnect force in hydraulic circuits where trapped residual pressure must be addressed. The flush face design limits contamination and unwanted fluid loss. The FD96 Series is available in sizes 1/4" through 2" to best meet your specific size requirements.

Product Features

- Thread together design allows connection and disconnection under pressure up to 4,300 psi
- Low connection force
- Dual flush-face valving with non-spill design
- Working pressures up to 8,700 psi
- Body material: High resistance carbon steel with zinc trivalent and black oxide plating


Applications & Markets

- Hydraulic fluid transfer
- High impulse hydraulics
- Oil field
- Mining


Physical Characteristics

Body Size	Max. Operating Pressure				Min. Burst Pressure				Rated Flow	Fluid Loss	Req. Torque to Connect						
	Connected		Plug/Male Half	Socket/Female Half	Connected		Plug/Male Half	Socket/Female Half									
	(bar)	(psi)	(bar)	(psi)	(bar)	(psi)	(bar)	(psi)									
1/4	600	8,700	600	8,700	420	6,090	1,500	21,750	1,500	21,750	1,260	18,270	12	3.2	.012	29-37	40-50
3/8	550	7,980	550	7,980	330	4,785	1,400	20,300	1,400	20,300	1,000	14,500	23	6.1	.040	37-44	50-60
1/2	550	7,980	550	7,980	330	4,785	1,400	20,300	1,400	20,300	1,000	14,500	45	11.9	.025	48-55	65-75
3/4	550	7,980	550	7,980	330	4,785	1,400	20,300	1,400	20,300	1,000	14,500	74	19.6	.033	52-59	70-80
1	500	7,250	500	7,250	330	4,785	1,250	18,125	1,250	18,125	1,000	14,500	100	26.5	.018	66-81	90-110
1 1/4	470	6,800	470	6,800	300	4,350	1,200	17,400	1,200	17,400	800	11,600	189	50.1	.060	92-107	125-145
1 1/2	400	5,800	400	5,800	270	3,915	1,700	15,950	1,100	15,950	800	11,600	288	76.3	.200	114-129	155-175
2	350	5,080	350	5,080	270	3,915	1,100	15,950	1,100	15,950	800	11,600	379	100.4	.350	236-258	320-355

Flow Data

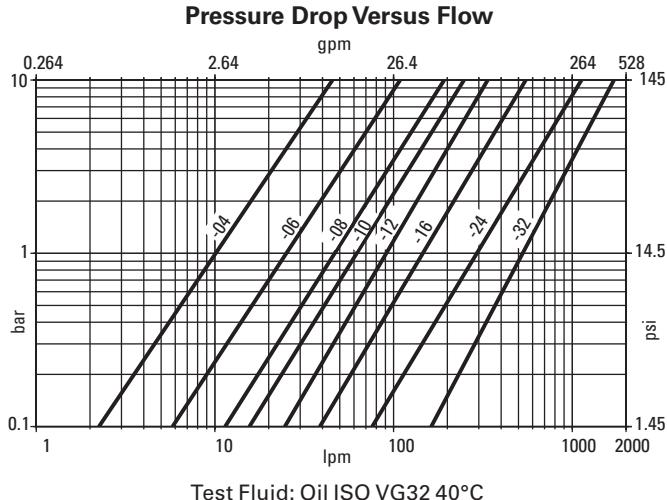

Connected Length



Body Size	Port Size	Connected Length "L"
		mm (in)
1/4	3/8	90.0 (3.54)
3/8	3/8	131.0 (5.16)
3/8	1/2	131.0 (5.16)
1/2	1/2	155.0 (6.10)
1/2	3/4	160.0 (6.30)
3/4	3/4	165.0 (6.50)
1	1	190.4 (7.50)
1	1 1/4	170.0 (6.69)
1 1/2	1 1/2	256.0 (10.08)
2	2	363.5 (14.31)

FD96 Series

High Pressure

Thread to Connect Flush Face

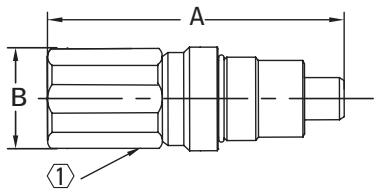


Figure 1




Figure 2

Dimensions (Female NPT)

Part Number	Coupling Type	Body Size	Port Size	Thread	Type	Fig.	Dimensions			
							A	B	Hex ①	
mm	(in)	mm	(in)	mm	(in)	mm	mm	mm	mm (in)	
FD96-1001-06-06	Socket/Female	3/8	3/8	3/8-18	Female NPT	2	65.8	(2.59)	41.8 (1.65)	30 (1.18)
FD96-1002-06-06	Plug/Male	3/8	3/8	3/8-18	Female NPT	1	82.5	(3.25)	37.8 (1.49)	27 (1.06)
FD96-1001-08-06	Socket/Female	3/8	1/2	1/2-14	Female NPT	2	70.8	(2.79)	41.8 (1.65)	30 (1.18)
FD96-1002-08-06	Plug/Male	3/8	1/2	1/2-14	Female NPT	1	85.0	(3.35)	37.8 (1.49)	27 (1.06)
FD96-1001-08-08	Socket/Female	1/2	1/2	1/2-14	Female NPT	2	77.8	(3.06)	49.8 (1.96)	36 (1.42)
FD96-1002-08-08	Plug/Male	1/2	1/2	1/2-14	Female NPT	1	95.0	(3.74)	45.8 (1.80)	36 (1.42)
FD96-1001-12-08	Socket/Female	1/2	3/4	3/4-14	Female NPT	2	84.8	(3.06)	49.8 (1.96)	36 (1.42)
FD96-1002-12-08	Plug/Male	1/2	3/4	3/4-14	Female NPT	1	97.4	(3.83)	45.8 (1.80)	36 (1.42)
FD96-1001-12-12	Socket/Female	3/4	3/4	3/4-14	Female NPT	2	84.9	(3.34)	53.8 (2.12)	41 (1.61)
FD96-1002-12-12	Plug/Male	3/4	3/4	3/4-14	Female NPT	1	99.0	(3.90)	49.8 (1.96)	36 (1.42)
FD96-1001-12-16	Socket/Female	1	3/4	3/4-14	Female NPT	2	96.7	(3.81)	58.8 (2.31)	46 (1.81)
FD96-1002-12-16	Plug/Male	1	3/4	3/4-14	Female NPT	1	113.6	(4.47)	54.8 (2.16)	46 (1.81)
FD96-1001-16-16	Socket/Female	1	1	1-11 1/2	Female NPT	2	99.7	(3.93)	58.8 (2.31)	46 (1.81)
FD96-1002-16-16	Plug/Male	1	1	1-11 1/2	Female NPT	1	113.6	(4.47)	54.8 (2.16)	46 (1.81)
FD96-1001-16-20	Socket/Female	1 1/4	1	1-11 1/2	Female NPT	2	105.8	(4.17)	69.8 (2.75)	55 (2.17)
FD96-1002-16-20	Plug/Male	1 1/4	1	1-11 1/2	Female NPT	1	123.4	(4.86)	64.5 (2.54)	55 (2.17)
FD96-1001-20-20	Socket/Female	1 1/4	1 1/4	1 1/4-11 1/2	Female NPT	2	106.8	(4.20)	69.8 (2.75)	55 (2.17)
FD96-1002-20-20	Plug/Male	1 1/4	1 1/4	1 1/4-11 1/2	Female NPT	1	123.4	(4.86)	64.5 (2.54)	55 (2.17)
FD96-1001-20-24	Socket/Female	1 1/2	1 1/4	1 1/4-11 1/2	Female NPT	2	133.5	(5.26)	92.0 (3.62)	65 (2.56)
FD96-1002-20-24	Plug/Male	1 1/2	1 1/4	1 1/4-11 1/2	Female NPT	1	150.0	(5.91)	89.8 (3.54)	65 (2.56)
FD96-1001-24-24	Socket/Female	1 1/2	1 1/2	1 1/2-11 1/2	Female NPT	2	133.5	(5.26)	92.0 (3.62)	65 (2.56)
FD96-1002-24-24	Plug/Male	1 1/2	1 1/2	1 1/2-11 1/2	Female NPT	1	150.0	(5.91)	89.8 (3.54)	65 (2.56)
FD96-1001-32-32	Socket/Female	2	2	2-11 1/2	Female NPT	2	224.8	(8.85)	200.0 (7.87)	90 (3.54)
FD96-1002-32-32	Plug/Male	2	2	2-11 1/2	Female NPT	1	218.4	(8.60)	145.0 (5.71)	90 (3.54)

Dimensions (Female SAE O-Ring)

Part Number	Coupling Type	Body Size	Port Size	Thread	Type	Fig.	Dimensions			
							A	B	Hex ①	
mm	(in)	mm	(in)	mm	(in)	mm	mm	mm	mm (in)	
FD96-1004-06-04	Socket/Female	1/4	3/8	9/16-18 UNF	Female SAE O-Ring	2	57.1	(2.25)	38.8 (1.53)	27 (1.06)
FD96-1005-06-04	Plug/Male	1/4	3/8	9/16-18 UNF	Female SAE O-Ring	1	72.8	(2.87)	34.8 (1.37)	22 (0.87)
FD96-1004-08-06	Socket/Female	3/8	1/2	3/4-16 UNF	Female SAE O-Ring	2	70.8	(2.79)	41.8 (1.65)	30 (1.18)
FD96-1005-08-06	Plug/Male	3/8	1/2	3/4-16 UNF	Female SAE O-Ring	1	87.0	(3.43)	37.8 (1.49)	27 (1.06)
FD96-1004-12-08	Socket/Female	1/2	3/4	11/16-12 UNF	Female SAE O-Ring	2	84.8	(3.06)	49.8 (1.96)	36 (1.42)
FD96-1005-12-08	Plug/Male	1/2	3/4	11/16-12 UNF	Female SAE O-Ring	1	100.4	(3.95)	45.8 (1.80)	36 (1.42)
FD96-1004-12-12	Socket/Female	3/4	3/4	11/16-12 UNF	Female SAE O-Ring	2	84.9	(3.34)	53.8 (2.12)	41 (1.61)
FD96-1005-12-12	Plug/Male	3/4	3/4	11/16-12 UN	Female SAE O-Ring	1	102.0	(4.02)	49.8 (1.96)	36 (1.42)
FD96-1004-12-16	Socket/Female	1	3/4	11/16-12 UN	Female SAE O-Ring	2	99.7	(3.93)	58.8 (2.31)	46 (1.81)
FD96-1005-12-16	Plug/Male	1	3/4	11/16-12 UN	Female SAE O-Ring	1	115.6	(4.55)	54.8 (2.16)	46 (1.81)
FD96-1004-16-16	Socket/Female	1	1	15/16-12 UN	Female SAE O-Ring	2	99.7	(3.93)	58.8 (2.31)	46 (1.81)
FD96-1005-16-16	Plug/Male	1	1	15/16-12 UN	Female SAE O-Ring	1	113.6	(4.47)	54.8 (2.16)	46 (1.81)
FD96-1004-16-20	Socket/Female	1 1/4	1	15/16-12 UN	Female SAE O-Ring	2	105.8	(4.17)	69.8 (2.75)	55 (2.17)
FD96-1005-16-20	Plug/Male	1 1/4	1	15/16-12 UN	Female SAE O-Ring	1	125.4	(4.94)	64.5 (2.54)	55 (2.17)
FD96-1004-20-20	Socket/Female	1 1/4	1 1/4	15/8-12 UN	Female SAE O-Ring	2	106.8	(4.20)	69.8 (2.75)	55 (2.17)
FD96-1005-20-20	Plug/Male	1 1/4	1 1/4	15/8-12 UN	Female SAE O-Ring	1	123.4	(4.86)	64.5 (2.54)	55 (2.17)
FD96-1004-20-24	Socket/Female	1 1/2	1 1/4	15/8-12 UN	Female SAE O-Ring	2	133.5	(5.26)	92.0 (3.62)	65 (2.56)
FD96-1005-20-24	Plug/Male	1 1/2	1 1/4	15/8-12 UN	Female SAE O-Ring	1	150.0	(5.91)	89.8 (3.54)	65 (2.56)
FD96-1004-24-24	Socket/Female	1 1/2	1 1/2	17/8-12 UN	Female SAE O-Ring	2	133.5	(5.26)	92.0 (3.62)	65 (2.56)
FD96-1005-24-24	Plug/Male	1 1/2	1 1/2	17/8-12 UN	Female SAE O-Ring	1	150.0	(5.91)	89.8 (3.54)	65 (2.56)
FD96-1004-32-32	Socket/Female	2	2	21/2-12 UN	Female SAE O-Ring	2	224.8	(8.85)	200.0 (7.87)	90 (3.54)
FD96-1005-32-32	Plug/Male	2	2	21/2-12 UN	Female SAE O-Ring	1	218.4	(8.60)	145.0 (5.71)	90 (3.54)

Dust Caps and Dust Plugs

Body Size	Part Number	Coupling Type	Cap Material	Body Size	Part Number	Coupling Type	Cap Material
1/4	FD96-1009-04	Socket/Female	Aluminum	1/4	FD96-1010-04	Plug/Male	Aluminum
3/8	FD96-1009-06	Socket/Female	Aluminum	3/8	FD96-1010-06	Plug/Male	Aluminum
1/2	FD96-1009-08	Socket/Female	Aluminum	1/2	FD96-1010-08	Plug/Male	Aluminum
3/4	FD96-1009-12	Socket/Female	Aluminum	3/4	FD96-1010-12	Plug/Male	Aluminum
1	FD96-1009-16	Socket/Female	Aluminum	1	FD96-1010-16	Plug/Male	Aluminum
1 1/4	FD96-1009-20	Socket/Female	Aluminum	1 1/4	FD96-1010-20	Plug/Male	Aluminum
1 1/2	FD96-1009-24	Socket/Female	Aluminum	1 1/2	FD96-1010-24	Plug/Male	Aluminum
2	FD96-1009-32	Socket/Female	Aluminum	2	FD96-1010-32	Plug/Male	Aluminum

MLDB Series (Stainless Steel) Flat Face/Dry Break



Eaton's MLDB Series stainless steel coupling is a flat face/dry break coupling used for fluid transfer applications. The MLDB Series offers the ability to connect with less force, higher sealing performance and are available in multiple configurable end connections.

Product Features

- Designed and manufactured in accordance with Article 3.3 of the European Pressure Equipment Directive (PED) 97/23 EC
- Safety sleeve lock prevents accidental disconnections
- Push to connect with double shut-off valving
- Capable of working under high temperature applications
- Shock resistant color coding ring option available in $\frac{1}{2}$ " size
- Serviceable design allows for easy cleaning and seal replacement
- Designed with higher flow capacity and resistance to aggressive fluids and corrosion
- Standard body material: 316/316L Stainless steel corrosion resistant
- Standard seal material: FKM, EPDM, Kalrez® and generic FFKM

Physical Characteristics


Body Size (in)	Nominal Flow Diameter (mm)	Max. Operating Pressure (bar)	Max. Operating Pressure (psi)	Rated* Flow (lpm)	Rated* Flow (gpm)	Air Inclusion ml-cc.	Fluid Loss ml-cc.	Force to Connect N	Force to Connect lbf
$\frac{1}{4}$	5.9	25	360	15	4	0.002	0.001	85	19
$\frac{1}{2}$	11.5	25	360	73	19	0.012	0.025	150	34
$\frac{3}{4}$	15.0	25	360	120	32	0.030	0.050	170	38
1	18.5	25	360	200	53	0.150	0.130	180	41

* Indicated values refer to a 1 bar/14.5 psi pressure drop.

Applications & Markets

- Process/Fluid transfer
- Cooling
- Corrosive environments
- Chemicals/
Petrochemicals
- Pharmaceuticals
- Food processing
- Electrical

Flow Data

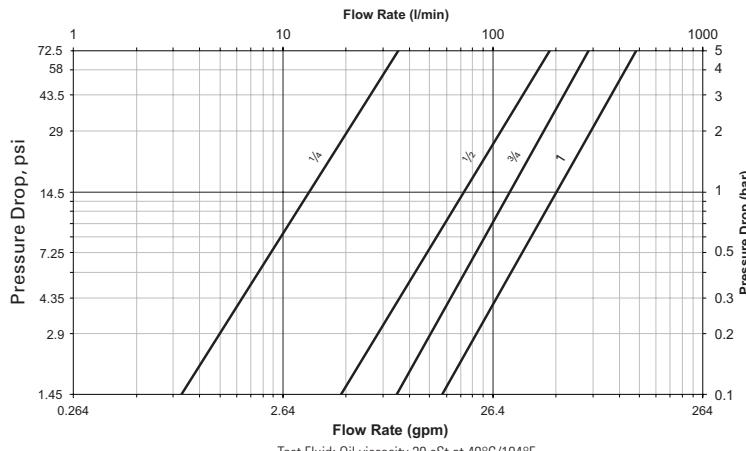

Seal Elastomer Data*

Seal Elastomer	Max. Operation Temperature Range
FKM	-20°C +200°C/-4°F +392°F
EPDM (Ethylene-Propylene)	-40°C +150°C/-40°F +302°F
Kalrez® 6375	-20°C +275°C/-4°F +527°F
Generic FFKM (Perfluorocarbon)	-15°C +275°C/+5°F +527°F

* For reference only, based on Eaton recommended temperatures.
Contact Eaton technical support for further information on fluid compatibility

MLDB Series (Stainless Steel) Flat Face/Dry Break

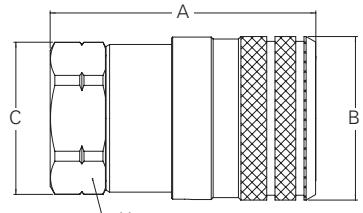


Figure 1

Sockets (Female)

Part Number	Thread Size*(Female)						Dimensions						Weight				
	FKM	EPDM	Kalrez 6375	Generic FFKM	Body Size	NPT	BSPP	Fig.	A (in)	B (in)	C (in)	Hex (in)	A (mm)	B (mm)	C (mm)	Hex (mm)	Ibs
ML2DBS25FBS	ML2DBS25FBS292	ML2DBS25FBS242	ML2DBS25FBS503	1/4	—	1/4-19	1	1.79	1.06	0.96	0.87	45.4	26.8	24.5	22	0.26	116
ML2DBS25F	ML2DBS25F292	ML2DBS25F242	ML2DBS25F503	1/4	—	1/4-18	1	1.73	1.06	0.96	0.87	43.9	26.8	24.5	22	0.26	116
ML4DBS50FBS	ML4DBS50FBS292	ML4DBS50FBS242	ML4DBS50FBS503	1/2	—	1/2-14	1	2.44	1.5	1.4	1.26	61.9	38.2	35.5	32	0.73	330
ML4DBS50F	ML4DBS50F292	ML4DBS50F242	ML4DBS50F503	1/2	—	1/2-14	1	2.44	1.5	1.4	1.26	61.9	38.2	35.5	32	0.73	330
ML6DBS75FBS	ML6DBS75FBS292	ML6DBS75FBS242	ML6DBS75FBS503	3/4	—	3/4-14	1	3.02	1.89	1.83	1.61	76.8	47.9	46.5	41	1.34	610
ML6DBS75F	ML6DBS75F292	ML6DBS75F242	ML6DBS75F503	3/4	—	3/4-14	1	3.02	1.89	1.83	1.61	76.8	47.9	46.5	41	1.34	610
ML8DBS100FBS	ML8DBS100FBS292	ML8DBS100FBS242	ML8DBS100FBS503	1	—	1-11	1	3.54	2.26	2.16	1.97	89.9	57.4	54.9	50	2.31	1050
ML8DBS100F	ML8DBS100F292	ML8DBS100F242	ML8DBS100F503	1	—	1-11 1/2	1	3.42	2.26	2.16	1.97	86.9	57.4	54.9	50	2.31	1050

*Alternative end connections available upon request.

To obtain connected length of coupling, add dimensions A (Fig. 1) and G (Fig. 2) together.

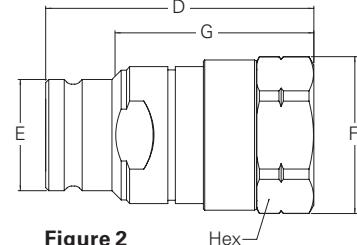


Figure 2

Plugs (Male)

Part Number	Thread Size*(Female)						Dimensions						Weight						
	FKM	EPDM	Kalrez® 6375	Generic FFKM	Body Size	NPT	BSPP	Fig.	D (in)	E (in)	F (in)	G (in)	Hex (in)	D (mm)	E (mm)	F (mm)	G (mm)	Hex (mm)	Ibs
ML2DBP25FBS	ML2DBP25FBS292	ML2DBP25FBS242	ML2DBP25FBS503	1/4	—	1/4-19	2	1.72	0.65	0.96	1.31	0.87	43.6	16.5	24.5	33.2	22	0.17	78
ML2DBP25F	ML2DBP25F292	ML2DBP25F242	ML2DBP25F503	1/4	—	1/4-18	2	1.66	0.65	0.96	1.25	0.87	42.1	16.5	24.5	31.7	22	0.17	78
ML4DBP50FBS	ML4DBP50FBS292	ML4DBP50FBS242	ML4DBP50FBS503	1/2	—	1/2-14	2	2.39	0.99	1.4	1.8	1.26	60.7	25.2	35.5	45.7	32	0.46	210
ML4DBP50F	ML4DBP50F292	ML4DBP50F242	ML4DBP50F503	1/2	—	1/2-14	2	2.39	0.99	1.4	1.8	1.26	60.7	25.2	35.5	45.7	32	0.46	210
ML6DBP75FBS	ML6DBP75FBS292	ML6DBP75FBS242	ML6DBP75FBS503	3/4	—	3/4-14	2	2.97	1.29	1.83	2.11	1.61	75.5	32.8	46.5	53.6	41	0.87	395
ML6DBP75F	ML6DBP75F292	ML6DBP75F242	ML6DBP75F503	3/4	—	3/4-14	2	2.97	1.29	1.83	2.11	1.61	75.5	32.8	46.5	53.6	41	0.87	395
ML8DBP100FBS	ML8DBP100FBS292	ML8DBP100FBS242	ML8DBP100FBS503	1	—	1-11	2	3.52	1.59	2.16	2.60	1.97	89.4	40.4	54.9	66.1	50	1.54	700
ML8DBP100F	ML8DBP100F292	ML8DBP100F242	ML8DBP100F503	1	—	1-11 1/2	2	3.4	1.59	2.16	2.48	1.97	86.4	40.4	54.9	63.1	50	1.54	700

*Alternative end connections available upon request.

To obtain connected length of coupling, add dimensions A (Fig. 1) and G (Fig. 2) together.

Seal Kit and Tool for Servicing Sockets (Female)

Body Size	Tool Part Number	Seal Kit Part Number (includes 5 sets)		Seal Kit Part Number (includes 1 set)	
		FKM	EPDM	Kalrez 6375	Generic FFKM
1/4	ML2DBS93	2DBSG143	2DBSG292	2DBSG242	2DBSG503
1/2	ML4DBS93	4DBSG143	4DBSG292	4DBSG242	4DBSG503
3/4	ML6DBS93	6DBSG143	6DBSG292	6DBSG242	6DBSG503
1	ML8DBS93	8DBSG143	8DBSG292	8DBSG242	8DBSG503

For installation instructions, please contact your Eaton sales representative.

Seal Kit for Servicing Plugs (Male)

Body Size	Seal Kit Part Number (includes 5 sets)		Seal Kit Part Number (includes 1 set)	
	FKM	EPDM	Kalrez 6375	Generic FFKM
1/4	2DBPG143	2DBPG292	2DBPG242	2DBPG503
1/2	4DBPG143	4DBPG292	4DBPG242	4DBPG503
3/4	6DBPG143	6DBPG292	6DBPG242	6DBPG503
1	8DBPG143	8DBPG292	8DBPG242	8DBPG503

For installation instructions, please contact your Eaton sales representative. No tool required for servicing of the plug(male).

Color Coding Ring Option*

Body Size	Socket/Female Ring** Color	Part Number	Plug/Male Ring** Color	Part Number	Tool Part Number	Tool & Rings Kit Part Number***
	Blue	CR12FFSLB	Blue	CR12FFPLB		
1/2	Red	CR12FFSRD	Red	CR12FFPRD	CR4DBSP93	CRKIT4DB
	Yellow	CR12FFSYL	Yellow	CR12FFPYL		
	Green	CR12FFSDG	Green	CR12FFPDG		

*For requests on other sizes, alternative colors or installation instructions, please contact your Eaton sales representative.

**Orders must be in multiples of 10 pcs.

***The kit consists of a tool plus 10 socket rings and 10 plug rings of each color.

5100 Series

Thread to Connect



Eaton's 5100 Series brass coupling with steel tubular valve offers minimum air inclusion and fluid loss. Thread together latch provides connect under pressure capability and vibration resistance. The 5100 Series is not rated for continuous hydraulic impulse applications. For hydraulic impulse applications, refer to the FD86 and FD96 Series thread to connect product lines.

Product Features

- Tubular valve construction for virtually no fluid loss during disconnection, reduces environmental and worker safety hazards
- Low air inclusion during connection maintains system performance
- Available with wing or hex nut configurations
- Connect against pressure capability allows connecting of halves even when pressurized up to 500 psi
- Steel flange available for accessible bulkhead mounting
- Standard seal material: Buna-N
- Standard body material: Brass body with high resistance carbon steel with zinc trivalent plated valving components, hex and wing nuts

Physical Characteristics


Body Dash Size	Body Interface Size	Max. Operating Pressure Connected	Max. Operating Pressure Disconnected								
			Plug/Male Half S2 and S4		Socket/Female Half S5		Vacuum	Rated Flow	Air Inclusion	Fluid Loss	
(in)	(in)	(bar) (psi)	(bar)	(psi)	(bar)	(psi)	(in./Hg)	(lpm)	(gpm)	cc. max.	cc.max.
1/4	1/4	207 3,000	207	3,000	207	3,000	28	15	4	.03	.01
3/8	1/2	207 3,000	207	3,000	207	3,000	28	26	7	.05	.06
1/2	1/2	207 3,000	207	3,000	207	3,000	28	26	7	.05	.10
5/8	3/4	207 3,000	207	3,000	207	3,000	28	68	18	.14	.10
3/4	3/4	207 3,000	207	3,000	207	3,000	28	68	18	.34	.26
1	1	207 3,000	207	3,000	207	3,000	28	151	40	.50	.35
1 1/4	1 1/4	190 2,750	172	2,500	190	2,750	28	284	75	.68	.70
1 1/2	1 1/2	172 2,500	172	2,500	138	2,000	28	379	100	.60	.94

Applications & Markets

- Hydraulics and fluid transfer
- On-highway hydraulic wet lines
- Dump and refuse vehicles
- Bulk liquid transfer

Flow Data

Pressure Drop Versus Flow Graph

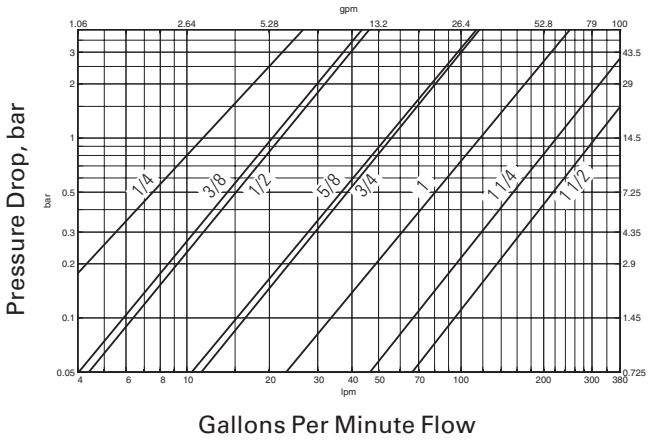

Test Fluid: MIL-H-5606 Oil at 100°F

5100 Series

Thread to Connect




Figure 1




Figure 2




Figure 3

Dimensions (Female NPT, Valved without Flange)

Part Number Buna-N	Type	Coupling Size	Body Size	Port Thread	Type	Fig.	Dimensions		B	Hex ①	Hex ②
							A mm (in)	B mm (in)			
5100-S2-4B	Plug/Male	1/4	1/8	1/8-27	Female NPT	1	47.8 (1.88)	22.9 .90)	17.5 (.69)	-	-
5110-S5-4B	Socket/Female	1/4	1/8	1/8-27	Female NPT	2	53.3 (2.10)	33.5 (1.32)	14.2 (.56)	30.2 (1.19)	
5111-4B	Complete	1/4	1/8	1/8-27	Female NPT	3	81.3 (3.20)	-	-	-	-
5100-S2-6B	Plug/Male	3/8	1/4	1/4-18	Female NPT	1	65.5 (2.58)	26.7 (1.05)	23.9 (.94)	-	-
5110-S5-6B	Socket/Female	3/8	1/4	1/4-18	Female NPT	2	61.0 (2.40)	38.9 (1.53)	19.3 (.76)	35.1 (1.38)	
5111-6B	Complete	3/8	1/4	1/4-18	Female NPT	3	104.4 (4.11)	-	-	-	-
5100-S2-8B	Plug/Male	1/2	3/8	3/8-18	Female NPT	1	65.5 (2.58)	26.7 (1.05)	23.9 (.94)	-	-
5110-S5-8B	Socket/Female	1/2	3/8	3/8-18	Female NPT	2	61.0 (2.40)	38.9 (1.53)	19.3 (.76)	35.1 (1.38)	
5111-8B	Complete	1/2	3/8	3/8-18	Female NPT	3	104.4 (4.11)	-	-	-	-
5100-S2-10B	Plug/Male	5/8	1/2	1/2-14	Female NPT	1	79.0 (3.11)	35.1 (1.38)	30.2 (1.19)	-	-
5110-S5-10B	Socket/Female	5/8	1/2	1/2-14	Female NPT	2	78.0 (3.07)	50.3 (1.98)	29.5 (1.16)	44.5 (1.75)	
5111-10B	Complete	5/8	1/2	1/2-14	Female NPT	3	132.3 (5.21)	-	-	-	-
5100-S2-12B	Plug/Male	3/4	3/4	3/4-14	Female NPT	1	79.0 (3.11)	35.1 (1.38)	30.2 (1.19)	-	-
5110-S5-12B	Socket/Female	3/4	3/4	3/4-14	Female NPT	2	78.0 (3.07)	50.3 (1.98)	29.5 (1.16)	44.5 (1.75)	
5111-12B	Complete	3/4	3/4	3/4-14	Female NPT	3	132.3 (5.21)	-	-	-	-
5100-S2-16B	Plug/Male	1	1	1-11 1/2	Female NPT	1	90.2 (3.55)	44.2 (1.74)	39.6 (1.56)	-	-
5110-S5-16B	Socket/Female	1	1	1-11 1/2	Female NPT	2	93.5 (3.68)	61.2 (2.41)	36.6 (1.44)	53.8 (2.12)	
5111-16B	Complete	1	1	1-11 1/2	Female NPT	3	151.9 (5.98)	-	-	-	-
5100-S2-20B	Plug/Male	1 1/4	1 1/4	1 1/4 - 11 1/2	Female NPT	1	94.2 (3.71)	52.8 (2.08)	47.8 (1.88)	-	-
5110-S5-20B	Socket/Female	1 1/4	1 1/4	1 1/4 - 11 1/2	Female NPT	2	101.6 (4.00)	58.7 (2.31)	45.2 (1.78)	63.5 (2.50)	
5111-20B	Complete	1 1/4	1 1/4	1 1/4 - 11 1/2	Female NPT	3	160.3 (6.31)	-	-	-	-
5100-S2-24B	Plug/Male	1 1/2	1 1/2	1 1/2 - 11 1/2	Female NPT	1	104.6 (4.12)	62.5 (2.46)	55.6 (2.19)	55.6 (2.19)	
5110-S5-24B	Socket/Female	1 1/2	1 1/2	1 1/2 - 11 1/2	Female NPT	2	104.1 (4.10)	78.7 (3.10)	50.8 (2.00)	-	-
5111-24B	Complete	1 1/2	1 1/2	1 1/2 - 11 1/2	Female NPT	3	165.6 (6.52)	-	-	-	-

5100 Series

Thread to Connect




Figure 4




Figure 5

Dimensions (Female NPT, Valved WITH Flange)

Part Number Buna-N	Coupling Type	Body Size	Port Size	Thread	Type	Fig.	Dimensions		
							A mm (in)	B mm (in)	Hex ① mm (in)
5100-S4-4B	Plug/Male	1/4	1/8	1/8-27	Female NPT	4	47.8 (1.88)	22.4 .88)	23.3 (.96)
5110-4B	Complete	1/4	1/8	1/8-27	Female NPT	5	81.3 (3.20)	-	-
5100-S4-6B	Plug/Male	3/8	1/4	1/4-18	Female NPT	4	65.5 (2.58)	26.7 (1.05)	28.5 (1.12)
5110-6B	Complete	3/8	1/4	1/4-18	Female NPT	5	104.4 (4.11)	-	-
5100-S4-8B	Plug/Male	1/2	3/8	3/8-18	Female NPT	4	65.5 (2.58)	26.7 (1.05)	28.5 (1.12)
5110-8B	Complete	1/2	3/8	3/8-18	Female NPT	5	104.4 (4.11)	-	-
5100-S4-10B	Plug/Male	5/8	1/2	1/2-14	Female NPT	4	79.0 (3.11)	35.2 (1.35)	41.2 (1.62)
5110-10B	Complete	5/8	1/2	1/2-14	Female NPT	5	132.3 (5.21)	-	-
5100-S4-12B	Plug/Male	3/4	3/4	3/4-14	Female NPT	4	79.0 (3.11)	35.2 (1.35)	41.2 (1.62)
5110-12B	Complete	3/4	3/4	3/4-14	Female NPT	5	132.3 (5.21)	-	-
5100-S4-16B	Plug/Male	1	1	1-11 1/2	Female NPT	4	90.2 (3.55)	44.2 (1.74)	47.8 (1.88)
5100-S4-20B	Plug/Male	1 1/4	1 1/4	1 1/4 - 11 1/2	Female NPT	4	94.2 (3.71)	52.8 (2.08)	53.9 (2.12)
5110-20B	Complete	1 1/4	1 1/4	1 1/4 - 11 1/2	Female NPT	5	160.3 (6.31)	-	-
5100-S4-24B	Plug/Male	1 1/2	1 1/2	1 1/2 - 11 1/2	Female NPT	4	104.6 (4.12)	62.5 (2.46)	63.5 (2.50)




Figure 6




Figure 7

Dimensions (Female NPT, Valved WITH Wing Nut Less Flange)

Part Number Buna-N	Coupling Type	Body Size	Port Size	Thread	Type	Fig.	Dimensions		
							A mm (in)	B mm (in)	Hex ① mm (in)
5100-S5-4B	Socket/Female	1/4	1/8	1/8-27	Female NPT	6	53.3 (2.10)	77.0 (3.03)	14.2 (.56)
5101-4B	Complete	1/4	1/8	1/8-27	Female NPT	7	81.3 (3.20)	-	-
5100-S5-6B	Socket/Female	3/8	1/4	1/4-18	Female NPT	6	61.0 (2.40)	87.4 (3.44)	19.3 (.76)
5101-6B	Complete	3/8	1/4	1/4-18	Female NPT	7	104.4 (4.11)	-	-
5100-S5-8B	Socket/Female	1/2	3/8	3/8-18	Female NPT	6	61.0 (2.40)	87.4 (3.44)	19.3 (.76)
5101-8B	Complete	1/2	3/8	3/8-18	Female NPT	7	104.4 (4.11)	-	-
5100-S5-10B	Socket/Female	5/8	1/2	1/2-14	Female NPT	6	78.0 (3.07)	104.9 (4.13)	29.5 (1.16)
5101-10B	Complete	5/8	1/2	1/2-14	Female NPT	7	132.3 (5.21)	-	-
5100-S5-12B	Socket/Female	3/4	3/4	3/4-14	Female NPT	6	78.0 (3.07)	104.9 (4.13)	29.5 (1.16)
5101-12B	Complete	3/4	3/4	3/4-14	Female NPT	7	132.3 (5.21)	-	-
5100-S5-16B	Socket/Female	1	1	1-11 1/2	Female NPT	6	93.5 (3.68)	111.3 (4.38)	36.6 (1.44)
5101-16B	Complete	1	1	1-11 1/2	Female NPT	7	151.9 (5.98)	-	-
5100-S5-20B	Socket/Female	1 1/4	1 1/4	1 1/4 - 11 1/2	Female Pipe	6	101.6 (4.00)	133.9 (5.27)	45.2 (1.78)
5101-20B	Complete	1 1/4	1 1/4	1 1/4 - 11 1/2	Female NPT	7	160.3 (6.31)	-	-
5100-S5-24B	Socket/Female	1 1/2	1 1/2	1 1/2 - 11 1/2	Female NPT	6	104.1 (4.10)	136.7 (5.38)	50.8 (2.00)
5101-24B	Complete	1 1/2	1 1/2	1 1/2 - 11 1/2	Female NPT	7	165.6 (6.52)	-	-

Note: Uses the 5100-S2 series plug/male half shown on page 49.

5100 Series

Thread to Connect




Figure 8

Dimensions (Female NPT, Valved WITH Wing Nut and Flange)

Part Number Buna-N	Coupling Type	Body Size	Port Size	Thread	Type	Fig.	Dimensions A
							mm (in)
5100-4B	Complete	1/4	1/8	1/8-27	Female NPT	8	81.3 (3.24)
5100-6B	Complete	3/8	1/4	1/4-18	Female NPT	8	104.4 (4.11)
5100-8B	Complete	1/2	3/8	3/8-18	Female NPT	8	104.4 (4.11)
5100-10B	Complete	5/8	1/2	1/2-14	Female NPT	8	132.3 (5.21)
5100-12B	Complete	3/4	3/4	3/4-14	Female NPT	8	132.3 (5.21)
5100-16B	Complete	1	1	1-11 1/2	Female NPT	8	151.9 (5.89)
5100-20B	Complete	1 1/4	1 1/4	1 1/4 - 11 1/2	Female NPT	8	160.3 (6.33)
5100-24B	Complete	1 1/2	1 1/2	1 1/2 - 11 1/2	Female NPT	8	165.6 (6.54)

Note: Uses the 5100-S2 series plug/male half shown on page 49.

Repair Kits

Part Number Buna-N	Body Size
FF098-04	1/4
FF098-08	3/8 & 1/2
FF098-12	5/8 & 3/4
FF098-16	1
FF098-20	1 1/4
FF098-24	1 1/2

Note: Each kit will repair both plug/male and socket/female halves.

Dust Caps and Dust Plugs

Part Number Dust Cap with Chain	Dust Plug with Chain	Body Size
5100-S7-5	5100-S9-5	1/4
5100-S7-8	5100-S9-8	3/8 & 1/2
5100-S7-12	5100-S9-12	5/8 & 3/4
5100-S7-16	5100-S9-16	1
5100-S7-20	5100-S9-20	1 1/4
5100-S7-24	5100-S9-24	1 1/2




6-Bolt Flange Assembly

Part Number 6-Bolt Flange Assembly	Body Size	Dimensions A	B
		mm (in)	mm (in)
150-22-5	1/4	5.11 (.201)	33.6 (1.44)
150-22-8	3/8 & 1/2	5.11 (.201)	42.9 (1.69)
150-22-12	5/8 & 3/4	5.11 (.201)	53.8 (2.12)
150-22-16	1	5.11 (.201)	60.5 (2.38)
150-22-20	1 1/4	5.11 (.201)	66.5 (2.62)
5100-22-245	1 1/2	5.11 (.201)	82.6 (3.25)

*To order caps and plugs without chain, order cap by part number 5100-32-(size) and plug by part number 5100-41-(size).

**6 Bolt Flange-holes equally spaced. (See "A" for bolt hole diameter, and "B" for bolt circle diameter).



FD85 Series

Thread to Connect



The Eaton FD85 Series is a thread to connect coupling most commonly used in Oil and Gas applications, but can also be found on demanding applications on both mobile and stationary equipment where operating pressures of 5,000 psi are present.

Product Features

- Thread to connect feature allows for use in high vibration and impulse applications
- Standard body material: Zinc trivalent plated carbon steel. Stainless steel construction available upon request.
- Connect under pressure capability up to 5,000 psi (345 bar)
- Standard seal material: Buna-N. FKM seals are available upon request.
- Wing nut design allows for easy connection and disconnection.
- 3/4" design is offered in a hex nut design
- Available sizes include: 3/4", 1", 1 1/2"
- Female NPTF and BSPP ends available.

Physical Characteristics

Body Size (in)	Max. Operating Pressure Connected (bar)	Max. Operating Pressure Connected (psi)	Min. Burst Pressure (bar)	Min. Burst Pressure (psi)	Air Inclusion cc. max.	Fluid Loss cc.max.
3/4	345	5,000	1,379	20,000	10	10
1	345	5,000	1,379	20,000	23	15
1 1/2	345	5,000	1.035	15,000	100	60

Applications & Markets

- Oilfields
- Offshore Drilling
- Construction
- Oil and Gas

FD85 Series

Thread to Connect

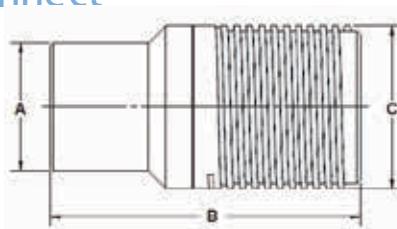


Figure 1




Figure 2




Figure 3

Plugs (Male)

Part Number	Coupling Type	Body Size	Thread	Fig.	Dimensions	A (in)	B (in)	C (in)	A (mm)	B (mm)	C (mm)
FD85-1001-12-12	Plug/Male	3/4	3/4-14 NPTF	1	1.38	3.27	1.75	35.1	83.1	44.5	
FD85-1017-12-12	Plug/Male	3/4	3/4-14 NPTF	1	1.38	3.27	1.75	35.1	83.1	44.5	
FD85-1001-16-16	Plug/Male	1	1 11-1/2 NPTF	1	1.77	4.17	2.25	45.0	105.9	57.2	
FD85-1001-16-16	Plug/Male	1	1 11-1/2 NPTF	1	1.77	4.17	2.25	45.0	105.9	57.2	
FD85-1017-16-16	Plug/Male	1	1 11-1/2 NPTF	1	1.77	4.17	2.25	45.0	105.9	57.2	
FD85-1001-24-24	Plug/Male	1 1/2	1 1/2 11-1/2 NPTF	1	2.50	5.99	2.62	63.5	152.1	66.5	
FD85-1017-24-24	Plug/Male	1 1/2	1 1/2 11-1/2 NPTF	1	2.50	5.99	2.62	63.5	152.1	66.5	

Sockets (Female)

Part Number	Coupling Type	Body Size	Thread	Fig.	Dimensions	D (in)	E (in)	F (in)	G (in)	D (mm)	E (mm)	F (mm)	G (mm)
FD85-1003-16-16	Socket/Female	1	1 11-1/2 NPTF	2	2.67	4.18	2.21	1.77	67.8	106.2	56.1	45.0	
FD85-1019-16-16	Socket/Female	1	1 11-1/2 NPTF	2	2.67	4.18	2.21	1.77	67.8	106.2	56.1	45.0	
FD85-1003-24-24	Socket/Female	1 1/2	1 1/2 11-1/2 NPTF	2	3.67	5.67	3.31	2.50	93.2	144.0	84.1	63.5	
FD85-1019-24-24	Socket/Female	1 1/2	1 1/2 11-1/2 NPTF	2	3.67	5.67	3.31	2.50	93.2	144.0	84.1	63.5	

Part Number	Coupling Type	Body Size	Thread	Fig.	Dimensions	D (in)	E (in)	F (in)	G (in)	D (mm)	E (mm)	F (mm)	G (mm)
FD85-1003-12-12	Socket/Female	3/4	3/4-NPTF NPTF	3	2.23	3.21	1.76	1.38	56.6	81.5	44.7	35.1	
FD85-1019-12-12	Socket/Female	3/4	3/4-NPTF NPTF	3	2.23	3.21	1.76	1.38	56.6	81.5	44.7	35.1	

Complete Sets*

Part Number	Coupling Type	Body Size	Thread	Fig.
FD85-1000-12-12	Complete	3/4	3/4-14 NPTF	1 & 3
FD85-1016-12-12	Complete	3/4	3/4-14 NPTF	1 & 3
FD85-1000-16-16	Complete	1	1 11-1/2 NPTF	1 & 2
FD85-1016-16-16	Complete	1	1 11-1/2 NPTF	1 & 2
FD85-1000-24-24	Complete	1 1/2	1 1/2 11-1/2 NPTF	1 & 2
FD85-1016-24-24	Complete	1 1/2	1 1/2 11-1/2 NPTF	1 & 2

*Includes one socket/female and one plug/male half in the outlined size.

FD86 Series

Thread to Connect

5,000 psi Dry Break – High Impulse



Eaton's FD86 Series is a thread together steel quick coupling offering dry break and high impulse technology and capabilities. The maximum operating pressure is 5,000 psi. The FD86 Series is available in either wing nut or hex nut configurations for ease of assembly and disassembly. (For higher pressure applications and additional size requirements, refer to FD96 on page 44.)

Product Features

- Tubular valve and sleeve construction for low fluid loss and air inclusion
- Thread together design using wing or hex nut allows connection and disconnection against pressures up to 750 psi
- Teflon* back-up rings along with secondary metal-to-metal sealing contact provides high impulse capability up to 5,000 psi operating pressure
- Acme threads prevent galling and provide ease of connection
- Steel flange available for bulkhead mounting
- Standard seal material: Buna-N
- Standard body material: High resistance carbon steel with zinc trivalent plating

Physical Characteristics


Body Size (in)	Max. Operating Pressure (bar)	Max. Operating Pressure (psi)	Min. Burst Pressure (bar)	Min. Burst Pressure (psi)	Vacuum Connected Only (in./Hg)	Rated Flow (lpm)	Rated Flow (gpm)	Air Inclusion cc. max.	Fluid Loss cc.max.
1	345	5,000	1,034	15,000	28	189	50	2.90	0.72
1 1/4	345	5,000	1,034	15,000	28	284	75	4.61	1.00

Applications & Markets

- Hydraulic and fluid transfer
- Mining equipment

Flow Data

Pressure Drop Versus Flow Graph

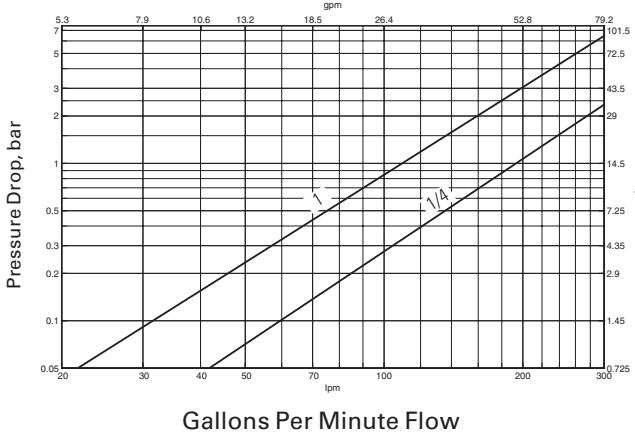

Test Fluid: MIL-H-5606 Oil at 100°F

FD86 Series

Thread to Connect

5,000 psi Dry Break – High Impulse




Figure 1




Figure 2




Figure 3

Dimensions (Female SAE O-Ring)

Part Number Buna-N	FKM	EPDM	Type	Body Size	Port Size	Thread	Type	Fig.	Dimensions			
									A mm (in)	B mm (in)		Hex Ⓢ mm (in)
FD86-1008-16-16	FD86-1043-16-16	FD86-1053-16-16	Plug/Male	1	1 5/16	1 5/16 - 12	Female SAE O-Ring 1	1	102.4 (4.03)	53.6 (2.11)	44.5	(1.75)
FD86-1010-16-16	FD86-1044-16-16	FD86-1054-16-16	Socket/Female	1	1 5/16	1 5/16 - 12	Female SAE O-Ring 2	2	117.3 (4.62)	114.3 (4.50)	-	-
FD86-1006-16-16	FD86-1042-16-16	FD86-1052-16-16	Socket/Female	1	1 5/16	1 5/16 - 12	Female SAE O-Ring 3	3	117.3 (4.62)	71.4 (2.81)	15.8	(1.62)
FD86-1008-20-20	FD86-1043-20-20	FD86-1053-20-20	Plug/Male	1 1/4	1 5/8	1 5/8 - 12	Female SAE O-Ring 1	1	105.7 (4.16)	63.0 (2.48)	57.2	(2.25)
FD86-1010-20-20	FD86-1044-20-20	FD86-1054-20-20	Socket/Female	1 1/4	1 5/8	1 5/8 - 12	Female SAE O-Ring 2	2	132.6 (5.22)	133.4 (5.25)	-	-
FD86-1006-20-20	FD86-1042-20-20	FD86-1052-20-20	Socket/Female	1 1/4	1 5/8	1 5/8 - 12	Female SAE O-Ring 3	3	132.6 (5.22)	86.4 (3.40)	50.8	(2.00)

Dimensions (Female NPT)

Part Number Buna-N	FKM	EPDM	Type	Body Size	Port Size	Thread	Type	Fig.	Dimensions			
									A mm (in)	B mm (in)		Hex Ⓢ mm (in)
FD86-1002-16-16	FD86-1040-16-16	FD86-1050-16-16	Plug/Male	1	1 - 11 1/2	1 - 11 1/2	Female NPT	1	111.8 (4.40)	53.6 (2.11)	44.5	(1.75)
FD86-1001-16-16	FD86-1039-16-16	FD86-1049-16-16	Socket/Female	1	1 - 11 1/2	1 - 11 1/2	Female NPT	2	126.5 (4.98)	114.3 (4.50)	-	-
FD86-1004-16-16	FD86-1041-16-16	FD86-1051-16-16	Socket/Female	1	1 - 11 1/2	1 - 11 1/2	Female NPT	3	126.5 (4.98)	71.4 (2.81)	15.8	(1.62)
FD86-1002-20-20	FD86-1040-20-20	FD86-1050-20-20	Plug/Male	1 1/4	1 1/4 - 11 1/2	1 1/4 - 11 1/2	Female NPT	1	112.5 (4.43)	63.0 (2.48)	57.2	(2.25)
FD86-1001-20-20	FD86-1039-20-20	FD86-1049-20-20	Socket/Female	1 1/4	1 1/4 - 11 1/2	1 1/4 - 11 1/2	Female NPT	2	142.8 (5.62)	133.4 (5.25)	-	-
FD86-1004-20-20	FD86-1041-20-20	FD86-1051-20-20	Socket/Female	1 1/4	1 1/4 - 11 1/2	1 1/4 - 11 1/2	Female NPT	3	142.8 (5.62)	86.4 (3.40)	50.8	(2.00)

Repair Kits

Part Number Buna-N	FKM	EPDM	Type	Body Size	Coupling Type
FF10596-16	FF10597-16	FF10598-16		1	Male
FF10593-16	FF10594-16	FF10595-16		1	Female
FF10596-20	FF10597-20	FF10598-20		1 1/4	Male
FF10593-20	FF10594-20	FF10595-20		1 1/4	Female

Dust Caps and Dust Plugs

Part Number Dust Cap with Chain	Dust Plug with Chain	Body Size
FD86-1018-16	FD86-1016-16	1
FD86-1018-20	FD86-1016-20	1 1/4



W46000 Series



Eaton's W46000 Series is a wing nut style screw to connect coupling used in hydraulic applications.

Product Features

- Wing Nut screw to connect
- Plug/Male half has bulkhead mount capability
- Metal dust caps and dust plugs
- Standard Body Material: Zinc trivalent plated steel
- Standard Seal Material: Nitrile


Physical Characteristics

Coupling Size (in)	DN/ND	Max. Operating Pressure (bar)	Max. Operating Pressure (psi)	Min. Burst Pressure (bar)	Min. Burst Pressure (psi)	Rated Flow (lpm)	Rated Flow (gpm)	Air Inclusion ml max
3/4	16	250	3625	1200	17404	63	16,7	10
1	20	230	3335	800	11603	99	26,0	15

Applications & Markets

- Hydraulic Circuits

Flow Data

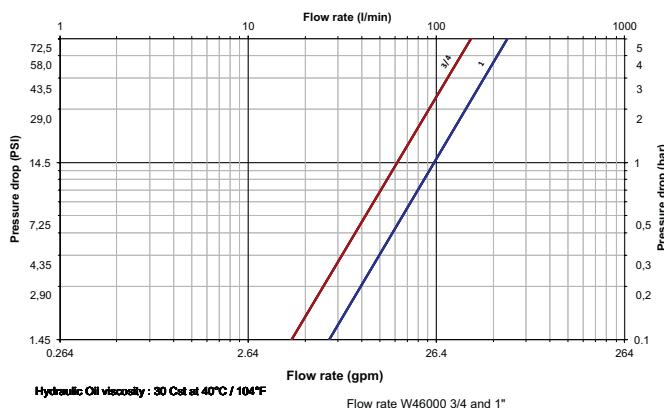

Size (in)	DN/ND	Socket/Female	Socket Dust Plug Only	Coupling Type	Connection	Fig.	Dimensions		
							L1	1	Hex 1
3/4	16	WA4604700	WA4614700	Socket/Female	G 3/4	1	77	M5	33
1	20	WA4605700	WA4615700	Socket/Female	G 1	1	83	M6	40

Size (in)	DN/ND	Socket/Female	Socket Dust Plug Only	Coupling Type	Connection	Fig.	Dimensions			
							L2	2	Hex 2	Hex 3
3/4	16	WA4604400	WA4614400	Plug/Male	G 3/4	2	78	G 1" 1/4	46	50
1	20	WA4605400	WA4615400	Plug/Male	G 1	2	83	G 1" 1/4	55	50

W36000 Series

Thread-to-Connect



Product Features

- Designed and manufactured in accordance with Article 3.3 of the European Pressure Equipment Directive (PED) 97/23 EC
- Proprietary profile
- Thread-to-connect with double shut-off valving

- Can be connected against 50 bar (725 psi) residual pressure
- Optional dust caps and plugs (PVC or aluminium)
- An alternative version can be offered with a safety feature which minimizes the risk of unscrewing in conditions of heavy vibration
- O-ring indication allows checking that connection is complete (thus guaranteeing full flow)
- Standard body material: Zinc trivalent plated steel
- Standard seal material: NBR

Physical Characteristics

Body Size (in)	Nominal Flow Diameter (mm)	Max. Operating Pressure bar	Max. Operating Pressure (psi)	Max. Residual Pressure during Connection bar	Max. Residual Pressure during Connection (psi)	Rated Flow* L/min	Rated Flow* (gpm)
1/4	5.3	450	6525	50	725	12	3.17
3/8	7.3	450	6525	50	725	21	5.55
1/2	10.2	400** 250***	5800** 3625***	50	725	43	11.36
5/8	13.0	400	5800	50	725	77	20.34
1	16.9	300	4350	50	725	120	31.70
1 1/4	22.4	300	4350	50	725	300	79.25

* Indicated values refer to a 1 bar / 14.5 psi pressure drop.


** Operating pressures apply to BSPP and NPT threads.

*** For ISO 8434-1 end connections.

Applications & Markets

- Construction
- Agriculture
- Forestry machinery
- Snow-grooming machines

Flow Data

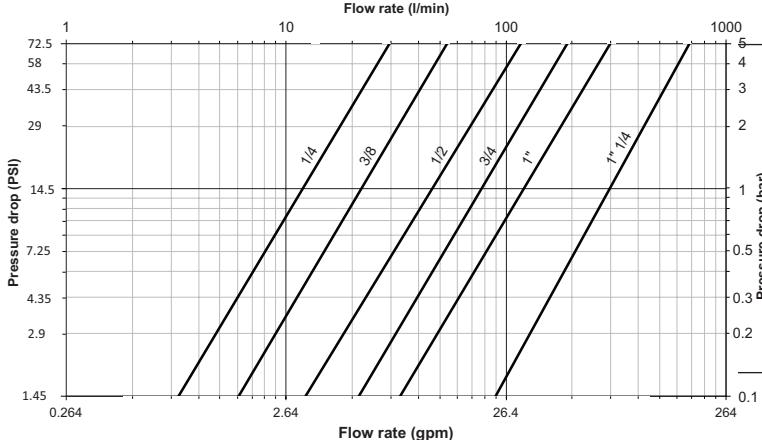

Seal Elastomer Data*

Seal Elastomer	Max. Operation Temperature Range
NBR (Nitrile)	-20°C +100°C/-4°F +212°F

* For reference only, based on Eaton recommended temperatures.
Contact Eaton technical support for further information on fluid compatibility.

W36000 Series

Thread-to-Connect

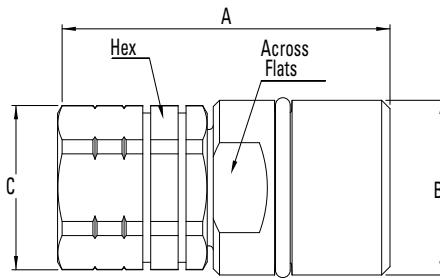


Figure 1

Sockets (Female) with Internal Thread


Part Number*	Body Size	Nominal Flow Diameter	Thread Size* (Female)	Dimensions								Weight					
				NPT	BSPP	Fig.	A (in)	B (in)	C (in)	Across Flats (in)	Hex (in)	A (mm)	B (mm)	C (mm)	Across Flats (mm)	Hex (mm)	Ibs
WA3601700	1/4	5.3	-	1/4-19	1	2.28	0.94	0.94	0.87	0.87	58	M24x2	24	22	22	0.26	117
WA3621725	1/4	5.3	1/4-18	-	1	2.28	0.94	0.94	0.87	0.87	58	M24x2	24	22	22	0.30	138
WA3602725BS	3/8	7.3	-	1/4-19	1	2.40	1.10	0.94	0.94	0.87	61	M28x2	24	24	22	0.36	163
WA3622725	3/8	7.3	1/4-18	-	1	2.40	1.10	0.94	0.94	0.87	61	M28x2	24	22	22	0.36	165
WA3602700	3/8	7.3	-	3/8-19	1	2.40	1.10	0.94	0.94	0.87	61	M28x2	24	24	22	0.34	156
WA3622737	3/8	7.3	3/8-18	-	1	2.40	1.10	0.94	0.94	0.87	61	M28x2	24	24	22	0.35	158
WA3603737BS	1/2	10.2	-	3/8-19	1	2.84	1.42	1.18	1.61(Hex)	1.06	72	M36x2	30	41(Hex)	27	0.82	370
WA3623737	1/2	10.2	3/8-18	-	1	2.84	1.42	1.18	1.61(Hex)	1.06	72	M36x2	30	41(Hex)	27	0.82	372
WA3603700	1/2	10.2	-	1/2-14	1	2.95	1.42	1.18	1.61(Hex)	1.06	75	M36x2	30	41(Hex)	27	0.79	360
WA3623750	1/2	10.2	1/2-14	-	1	2.95	1.42	1.18	1.61(Hex)	1.06	75	M36x2	30	41(Hex)	27	0.80	361
WA3604750BS	3/4	13	-	1/2-14	1	3.15	1.65	1.57	1.42	1.42	80	M42x2	40	36	36	1.06	480
WA3624750	3/4	13	1/2-14	-	1	3.15	1.65	1.57	1.42	1.42	80	M42x2	40	36	36	1.07	484
WA3604700	3/4	13	-	3/4-14	1	3.15	1.65	1.57	1.42	1.42	80	M42x2	40	36	36	1.03	466
WA3624775	3/4	13	3/4-14	-	1	3.15	1.65	1.57	1.42	1.42	80	M42x2	40	36	36	1.04	472
WA3605775BS	1	16.9	-	3/4-14	1	3.78	1.89	1.81	1.65	1.65	96	M48x3	46	42	42	1.62	735
WA3625775	1	16.9	3/4-14	-	1	3.78	1.89	1.81	1.65	1.65	96	M48x3	46	42	42	1.63	741
WA3605700	1	16.9	-	1-11 1/2	1	3.78	1.89	1.81	1.65	1.65	96	M48x3	46	42	42	1.51	684
WA36257100	1	16.9	1-11 1/2	-	1	3.78	1.89	1.81	1.65	1.65	96	M48x3	46	42	42	1.53	694
WA3606700	1 1/4	22.4	-	1 1/4-11	1	4.96	2.76	2.83	2.56	2.56	126	M70x3	72	65	65	4.82	2185
WA36267125	1 1/4	22.4	1 1/4-11 1/2	-	1	4.96	2.76	2.83	2.56	2.56	126	M70x3	72	65	65	4.87	2207
WA36067150BS	1 1/4	22.4	-	1 1/2-11	1	4.96	2.76	2.83	2.56	2.56	126	M70x3	72	65	65	4.63	2101
WA36267150	1 1/4	22.4	1 1/2-11 1/2	-	1	4.96	2.76	2.83	2.56	2.56	126	M70x3	72	65	65	4.68	2121

* Alternative end connections upon request.

To obtain connected length of coupling add dimensions A (Fig. 1) and K (Fig. 3) or O (Fig. 4) together.

End Connections

ISO 8434-1
(standard version)



ISO 8434-1
(bulkhead version)

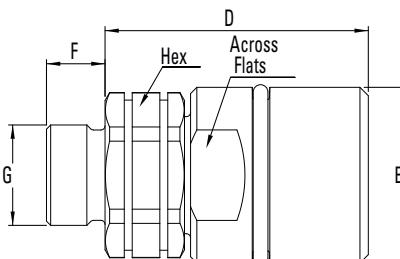



Figure 2

Sockets (Female) with External Thread

Part Number	Body Size	Nominal Flow Diameter	Thread Size* (Male)	Dimensions								Weight						
				ISO 8434-1**	Fig.	D (in)	E (in)	F (in)	G (in)	Across Flats (in)	Hex (in)	D (mm)	E (mm)	F (mm)	G (mm)	Across Flats (mm)	Hex (mm)	Ibs
WA3633708L	1/2	10.2	M14x1.5 - 8L	2	2.32	1.42	0.39	0.55	1.61(Hex)	1.06	59	M36x2	10	M14x1.5	41(Hex)	27	0.73	330
WA3633710L			M16x1.5 - 10L	2	2.28	1.42	0.43	0.63	1.61(Hex)	1.06	58	M36x2	11	M16x1.5	41(Hex)	27	0.72	328
WA3633712L			M18x1.5 - 12L	2	2.28	1.42	0.43	0.71	1.61(Hex)	1.06	58	M36x2	11	M18x1.5	41(Hex)	27	0.73	330
WA3633715L			M22x1.5 - 15L	2	2.24	1.42	0.47	0.87	1.61(Hex)	1.06	57	M36x2	12	M22x1.5	41(Hex)	27	0.77	350
WA3633715LBH			M22x1.5 - 15L Bulkhead	2	2.28	1.42	1.50	0.87	1.61(Hex)	1.06	58	M36x2	38	M22x1.5	41(Hex)	27	0.85	385

* Alternative end connections upon request.

** Light L series = working pressure 250 bar/3625 psi max.

To obtain connected length of coupling add dimensions D (Fig. 2) and K (Fig. 3) or O (Fig. 4) together.

W36000 Series

Thread-to-Connect




Figure 3

Plugs (Male) with Internal Thread


Part Number	Body Size	Nominal Flow Diameter	Thread Size* (Female)	Dimensions												Weight				
				NPT	BSPP	Fig.	H (in)	I (in)	J (in)	K (in)	Hex 1 (in)	Hex 2 (in)	H (mm)	I (mm)	J (mm)	K (mm)	Hex 1 (mm)	Hex 2 (mm)	Ibs	grams
WA3601400	1/4	5.3	-	1/4-19	3		2.17	1.26	0.94	1.22	1.14	0.87	55	32	24	31	29	22	0.41	184
WA3621425	1/4	5.3	1/4-18	-	3		2.17	1.26	0.94	1.22	1.14	0.87	55	32	24	31	29	22	0.33	150
WA3602425BS	3/8	7.3	-	1/4-19	3		2.28	1.38	0.94	1.26	1.26	0.87	58	35	24	32	32	22	0.36	164
WA3622425	3/8	7.3	1/4-18	-	3		2.28	1.38	0.94	1.26	1.26	0.87	58	35	24	32	32	22	0.37	166
WA3602400	3/8	7.3	-	3/8-19	3		2.28	1.38	0.94	1.26	1.26	0.87	58	35	24	32	32	22	0.35	158
WA3622437	3/8	7.3	3/8-18	-	3		2.28	1.38	0.94	1.26	1.26	0.87	58	35	24	32	32	22	0.35	160
WA3603437BS	1/2	10.2	-	3/8-19	3		2.52	1.77	1.18	1.46	1.61	1.06	64	45	30	37	41	27	0.61	276
WA3623437	1/2	10.2	3/8-18	-	3		2.52	1.77	1.18	1.46	1.61	1.06	64	45	30	37	41	27	0.61	278
WA3603400	1/2	10.2	-	1/2-14	3		2.60	1.77	1.18	1.57	1.61	1.06	66	45	30	40	41	27	0.60	271
WA3623450	1/2	10.2	1/2-14	-	3		2.60	1.77	1.18	1.57	1.61	1.06	66	45	30	40	41	27	0.60	273
WA3604450BS	3/4	13.0	-	1/2-14	3		3.03	1.97	1.57	1.85	1.81	1.42	77	50	40	47	46	36	1.01	456
WA3624450	3/4	13.0	1/2-14	-	3		3.03	1.97	1.57	1.85	1.81	1.42	77	50	40	47	46	36	1.01	460
WA3604400	3/4	13.0	-	3/4-14	3		3.03	1.97	1.57	1.85	1.81	1.42	77	50	40	47	46	36	0.97	442
WA3624475	3/4	13.0	3/4-14	-	3		3.03	1.97	1.57	1.85	1.81	1.42	77	50	40	47	46	36	0.99	448
WA3605475BS	1	16.9	-	3/4-14	3		3.62	2.36	1.81	2.24	2.17	1.65	92	60	46	57	55	42	1.77	805
WA3625475	1	16.9	3/4-14	-	3		3.62	2.36	1.81	2.24	2.17	1.65	92	60	46	57	55	42	1.79	811
WA3605400	1	16.9	-	1-11	3		3.62	2.36	1.81	2.24	2.17	1.65	92	60	46	57	55	42	1.66	751
WA36254100	1	16.9	1-11 1/2	-	3		3.62	2.36	1.81	2.24	2.17	1.65	92	60	46	57	55	42	1.68	761
WA3606400	1 1/4	22.4	-	1 1/4-11	3		4.72	3.50	2.83	2.76	3.03	2.56	120	89	72	70	77	65	5.56	2520
WA36264125	1 1/4	22.4	1 1/4-11 1/2	-	3		4.72	3.50	2.83	2.76	3.03	2.56	120	89	72	70	77	65	5.60	2542
WA36064150BS	1 1/4	22.4	-	1 1/2-11	3		4.72	3.50	2.83	2.76	3.03	2.56	120	89	72	70	77	65	5.37	2436
WA36264150	1 1/4	22.4	1 1/2-11 1/2	-	3		4.72	3.50	2.83	2.76	3.03	2.56	120	89	72	70	77	65	5.41	2456

* Alternative end connections upon request.

To obtain connected length of coupling add dimensions K (Fig. 3) and A (Fig. 1) or D (Fig. 2) together.

End Connections

ISO 8434-1
(standard version)



ISO 8434-1
(bulkhead version)





Figure 4

Plugs (Male) with External Thread

Part Number	Body Size	Nominal Flow Diameter	Thread Size* (Male)	Dimensions												Weight				
				ISO 8434-1**	Fig.	L (in)	M (in)	N (in)	O (in)	P (in)	Hex 1 (in)	Hex 2 (in)	L (mm)	M (mm)	N (mm)	O (mm)	P (mm)	Hex 1 (mm)	Hex 2 (mm)	Ibs
WA3633408L	1/2	10.2	M14x1.5 - 8L	4	1.93	1.77	0.39	1.42	0.55	1.61	1.06	49	45	10	36	M14x1.5	41	27	0.56	255
			M16x1.5 - 10L	4	1.93	1.77	0.43	1.42	0.63	1.61	1.06	49	45	11	36	M16x1.5	41	27	0.56	253
			M18x1.5 - 12L	4	1.93	1.77	0.43	1.42	0.71	1.61	1.06	49	45	11	36	M18x1.5	41	27	0.56	255
			M22x1.5 - 15L	4	1.93	1.77	0.47	1.42	0.87	1.61	1.06	49	45	12	36	M22x1.5	41	27	0.61	275
			M22x1.5 - 15L Bulkhead	4	1.93	1.77	1.50	1.42	0.87	1.61	1.06	49	45	38	36	M22x1.5	41	27	0.68	310

* Alternative end connections upon request.

** Light L series = working pressure 250 bar/3625 psi max.

To obtain connected length of coupling add dimensions O (Fig. 4) and A (Fig. 1) or D (Fig. 2) together.

W36000 Series

Thread-to-Connect

Dust Plugs and Dust Caps

Body Size (in)	Socket Dust Plug Part Number Anodized Aluminum	Plug Dust Cap Part Number PVC	Body Size (in)	Socket Dust Plug Part Number Anodized Aluminum	Plug Dust Cap Part Number PVC
1/4	WD3611700	WP3611700	1/4	WD3611400	WP3611400
5/8	WD3612700	WP3612700	5/8	WD3612400	WP3612400
1/2	WD3613700	WP3613700	1/2	WD3613400	WP3613400
3/4	WD3614700	WP3614700	3/4	WD3614400	WP3614400
1	WD3615700	WP3615700	1	WD3615400	WP3615400
1 1/4	WD3616700	WP3616700	1 1/4	WD3616400	WP3616400

For installation instructions, please contact your Eaton sales representative.



Metal Socket Dust Plug



Metal Plug Dust Cap



PVC Socket Dust Plug



PVC Plug Dust Cap

Seal Kit for Servicing Sockets (Female)

Body Size (in)	Seal & Back-up Ring Kit* Part Number	NBR seals & PTFE back-up rings
1/4	WG3601700	10 seals + 10 back-up rings
5/8	WG3602700	10 seals + 10 back-up rings
1/2	WG3603700	10 seals + 10 back-up rings
3/4	WG3604700	5 seals + 5 back-up rings
1	WG3605700	5 seals + 5 back-up rings
1 1/2	WG3606700	1 seal + 1 back-up ring

* The valve seal is not included in our repair kits.

GA90090 Series




Eaton's high pressure hydraulic coupling GA90090 was engineered to perform in applications that require the highest level of performance. Working pressure of up to 420 bar (6,000psi) in all sizes. One of the most demanding applications is the drill hammer used in construction.

Product Features


- Maximum working pressure up to 420 bar [6000 psi] in all sizes
- Available in size -8, -10, and -12
- Available thread configurations: Metric, UN, and BSP
- Self-sealing features guarantee minimum air inclusion and loss of fluid
- Connection via adapter
- Detachable under pressure
- Long lifetime in dynamic applications
- Works in applications that have extremely high pressure ratings (up to 420 bar)
- Exceeds the requirements of ISC7241/1
- Standard model available in zinc plated steel

Applications & Markets

- High pressure hydraulic systems and fluid transfer used in the construction, agriculture, and forestry markets
- Dynamic hydraulic applications like the drilling hammer

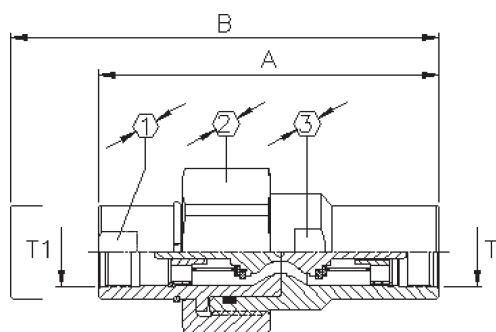

Connected Coupling

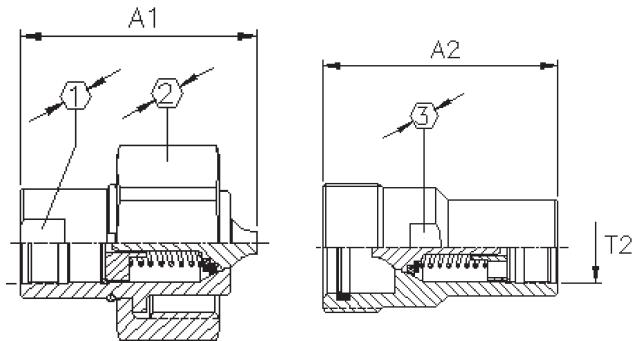

Male Half Female Half

Metric Thread

Size	DN	Coupling	Thread	A	B	Hex 1	Hex 2	Hex 3
				(T1=T2)	(mm)	(mm)	(mm)	(mm)
-8	12	GA90090-8	M22x1,5	89.1	105	27	41	27
-12	16	GA90090-12	M30x1,5	143.6	183	36	65	46
-16	20	GA90090-16	M38x1,5	163.7	196.7	50	75	55

Size	DN	Male Half	Female Half	A1	A2		
						(mm)	(mm)
-8	12	GA90092-8	GA90091-8	45.7	59.4		
-12	16	GA90092-12	GA90091-12	76.8	96.7		
-16	20	GA90092-16	GA90091-16	81.7	115.0		

UNF-Thread*

Size	DN	Coupling	Thread	A	B	Hex 1	Hex 2	Hex 3
				(T1=T2)	(mm)	(mm)	(mm)	(mm)
-8	12	GA90762-8	7/8-14UNF-2B	93.1	109	27	41	27
-12	16	GA90762-12	1 3/16-12UNF-2B	163.7	196.7	36	65	46

Size	DN	Male Half	Female Half	A1	A2		
						(mm)	(mm)
-8	12	GA90764-8	GA90763-8	47.7	61.4		
-12	16	GA90764-12	GA90763-12	88.8	106.7		

*Thread according to SAE J1926-1 (ISO 11926-1)

BSP-Thread

Size	DN	Coupling	Thread	A	B	Hex 1	Hex 2	Hex 3
				(T1=T2)	(mm)	(mm)	(mm)	(mm)
-8	12	GA90767-8	G 1/2"-14	99.1	115	27	41	27
-12	16	GA90767-12-16	G 1"-11	158.8	188.7	36	65	46
-16	20	GA90767-16-20	G 1 1/4"-11	163.7	196.7	50	75	55

Size	DN	Male Half	Female Half	A1	A2		
						(mm)	(mm)
-8	12	GA90767-8	GA90768-8	50.7	64.4		
-12	16	GA90767-12-16	GA90768-12-16	84.4	104.3		
-16	20	GA90767-16-20	GA90768-16-20	81.7	115.0		

W6000 Series (Steel) Thread-to-Connect



Product Features

- Proprietary profile
- Thread-to-connect with double shut-off valving
- Optional dust caps and plugs (made of anodized aluminium)
- Can be connected under residual pressure
- Standard body material: Zinc trivalent plated steel
- Standard seal material: NBR, FKM, EPDM

European Pressure Equipment Directive

Couplings with nominal diameters up to and including 25 mm are designed and manufactured under Article 3.3 of the European Pressure Equipment Directive 97/23 EC. Couplings with nominal diameters greater than 25 mm are designed and manufactured in accordance with the stipulations of Module A of the European Pressure Equipment Directive 97/23 EC. They should not be used to convey unstable gases.

Group 1 = Hazardous media / Group 2 = Other media

Eaton's W6000 Series steel quick disconnect coupling is a thread-to-connect with a rugged construction. It remains the series users refer to when it deals with severe hydraulic applications such as construction and mining. The design and materials used give this quick disconnect coupling resistance to heavy mechanical loads. Most common examples are ram loads, hydraulic shocks, and severe pulsating pressures.

Physical Characteristics

Body Size (in)	Nominal Flow Diameter (mm)	Max. Operating Pressure*				Maximum Residual Pressure during Connection***				Rated Flow** (lpm)	Fluid Loss (gpm)	ml-cc.
		(bar)	(psi)	(bar)	(psi)	(bar)	(psi)	(bar)	(psi)			
1/4	5.7	1,100	15,950	1,100	15,950	30	435	11.6	3.06	1.1		
3/8	7.6	750	10,875	750	10,875	30	435	16.7	4.41	1.9		
1/2	10.3	750	10,875	750	10,875	30	435	25.5	6.74	2.8		
5/8	14.2	650	9,425	650	9,425	50	725	55	14.53	5.8		
1	16.5	450	6,525	450	6,525	30	435	87	22.98	10.9		
1 1/4	20.5	450	6,525	450	6,525	30	435	140	36.98	26.9		
1 1/2	25.8	300	4,350	38	550	30	435	208	54.95	37.5		
2	34.7	300	4,350	28	405	30	435	357	94.30	81		

* For pulsating pressures when disconnected apply a multiplier of 0.5


** Indicated values refer to a 1 bar/14.5 psi pressure drop.

*** When connecting under pressure, the socket nut thread must be lubricated.

Applications & Markets

- Construction
- Oil & Gas
- Material handling
- All industrial and severe applications
- Systems subject to heavy mechanical loads, high pressures

Flow Data

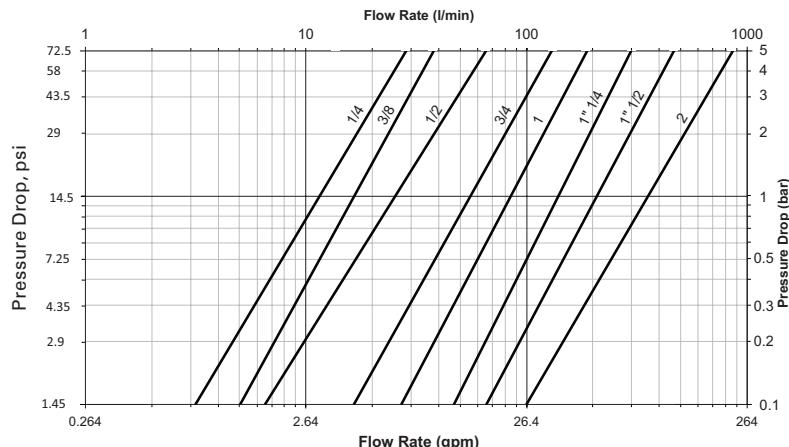

Test Fluid: Oil viscosity 30 cSt at 40°C/104°F

Seal Elastomer Data*

Seal Elastomer	Max. Operation Temperature Range
NBR (Nitrile)	-20°C +100°C/-4°F +212°F
FKM	-20°C +200°C/-4°F +392°F
EPDM (Ethylene-Propylene)	-40°C +150°C/-40°F +302°F

* For reference only, based on Eaton recommended temperatures.

Contact Eaton technical support for further information on fluid compatibility.

W6000 Series (Steel)

Thread-to-Connect

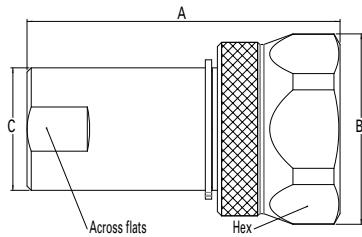


Figure 1

Sockets (Female)

Part Number	Nominal Body Flow Size						Dimensions	Weight													
	NBR	FKM	EPDM	Diameter (in)	(mm)	NPT	BSPP	Metric	Fig.	A (in)	B (in)	C (in)	Across Flats (in)	Hex (mm)	A (mm)	B (mm)	C (mm)	Across Flats (mm)	Hex (mm)	Ibs	grams
WA0601700	WA06017V0	WA06017E0	1/4	5.7	-	1/4-19	-	-	1	2.09	1.38	0.83	0.75	1.26	53	35	21	19	32	0.32	144
WA0621700	WA06217V0	WA06217E0	1/4	5.7	1/4-18	-	-	-	1	2.09	1.38	0.83	0.75	1.26	53	35	21	19	32	0.32	144
WA0602700	WA06027V0	WA06027E0	3/8	7.6	-	3/8-19	-	-	1	2.56	1.50	0.98	0.90	1.38	65	38	25	23	35	0.48	217
WA0622700	WA06227V0	WA06227E0	3/8	7.6	3/8-18	-	-	-	1	2.56	1.50	0.98	0.90	1.38	65	38	25	23	35	0.48	217
WA0603700	WA06037V0	WA06037E0	1/2	10.3	-	1/2-14	-	-	1	2.91	1.77	1.14	1.06	1.61	74	45	29	27	41	0.71	320
WA0623700	WA06237V0	WA06237E0	1/2	10.3	1/2-14	-	-	-	1	2.91	1.77	1.14	1.06	1.61	74	45	29	27	41	0.71	320
WA0633700	WA06337V0	WA06337E0	1/2	10.3	-	-	M22x1.5	1	2.91	1.77	1.14	1.06	1.61	74	45	29	27	41	0.71	320	
WA0604700	WA06047V0	WA06047E0	3/4	14.2	-	3/4-14	-	-	1	3.58	2.16	1.50	1.38	1.97	91	55	38	35	50	1.32	600
WA0624700	WA06247V0	WA06247E0	3/4	14.2	3/4-14	-	-	-	1	3.58	2.16	1.50	1.38	1.97	91	55	38	35	50	1.32	600
WA0605700	WA06057V0	WA06057E0	1	16.5	-	1-11	-	-	1	4.05	2.72	1.81	1.61	2.56	103	69	46	41	65	2.41	1092
WA0625700	WA06257V0	WA06257E0	1	16.5	1-11 1/2	-	-	-	1	4.05	2.72	1.81	1.61	2.56	103	69	46	41	65	2.41	1092
WA0635700	WA06357V0	WA06357E0	1	16.5	-	-	M33x1.5	1	4.05	2.72	1.81	1.61	2.56	103	69	46	41	65	2.41	1092	
WA0606700	WA06067V0	WA06067E0	1 1/4	20.5	-	1 1/4-11	-	-	1	5.71	3.50	2.36	2.16	3.03	145	89	60	55	77	6.13	2780
WA0626700	WA06267V0	WA06267E0	1 1/4	20.5	1 1/4-11 1/2	-	-	-	1	5.71	3.50	2.36	2.16	3.03	145	89	60	55	77	6.13	2780
WA0607700	WA06077V0	WA06077E0	1 1/2	25.8	-	1 1/2-11	-	-	1	6.81	3.94	2.64	2.48	3.46	173	100	67	63	88	9.26	4200
WA0627700	WA06277V0	WA06277E0	1 1/2	25.8	1 1/2-11 1/2	-	-	-	1	6.81	3.94	2.64	2.48	3.46	173	100	67	63	88	9.26	4200
WA0609700	WA06097V0	WA06097E0	2	34.7	-	2-11	-	-	1	8.07	4.60	3.07	2.80	4.13	205	117	78	71	105	14.64	6640
WA0629700	WA06297V0	WA06297E0	2	34.7	2-11 1/2	-	-	-	1	8.07	4.60	3.07	2.80	4.13	205	117	78	71	105	14.64	6640

* Alternative end connections available upon request.

To obtain connected length of coupling add dimensions A (Fig.1) and G (Fig. 2) together.




Figure 2

Plugs (Male)

Part Number	Nominal Body Flow Size						Dimensions	Weight													
	NBR	FKM	EPDM	Diameter (in)	(mm)	NPT	BSPP	Metric	Fig.	D (in)	E (in)	F (in)	G (in)	Across Flats (in)	D (mm)	E (mm)	F (mm)	G (mm)	Across Flats (mm)	Ibs	grams
WA0601400	WA06014V0	WA06014E0	1/4	5.7	-	1/4-19	-	-	2	1.38	0.59	0.90	0.45	0.75	35	15	23	11.5	19	0.16	71
WA0621400	WA06214V0	WA06214E0	1/4	5.7	1/4-18	-	-	-	2	1.38	0.59	0.90	0.45	0.75	35	15	23	11.5	19	0.16	71
WA0602400	WA06024V0	WA06024E0	3/8	7.6	-	3/8-19	-	-	2	1.65	0.75	1.02	0.52	0.90	42	19	26	13	23	0.23	104
WA0622400	WA06224V0	WA06224E0	3/8	7.6	3/8-18	-	-	-	2	1.65	0.75	1.02	0.52	0.90	42	19	26	13	23	0.23	104
WA0603400	WA06034V0	WA06034E0	1/2	10.3	-	1/2-14	-	-	2	1.97	0.87	1.26	0.77	1.06	50	22	32	19.5	27	0.36	165
WA0623400	WA06234V0	WA06234E0	1/2	10.3	1/2-14	-	-	-	2	1.97	0.87	1.26	0.77	1.06	50	22	32	19.5	27	0.36	165
WA0633400	WA06334V0	WA06334E0	1/2	10.3	-	-	M22x1.5	2	1.97	0.87	1.26	0.77	1.06	50	22	32	19.5	27	0.36	165	
WA0604400	WA06044V0	WA06044E0	3/4	14.2	-	3/4-14	-	-	2	2.48	1.14	1.65	1.02	1.38	63	29	42	26	35	0.84	382
WA0624400	WA06244V0	WA06244E0	3/4	14.2	3/4-14	-	-	-	2	2.48	1.14	1.65	1.02	1.38	63	29	42	26	35	0.84	382
WA0605400	WA06054V0	WA06054E0	1	16.5	-	1-11	-	-	2	2.80	1.42	1.89	1.14	1.61	71	36	48	29	41	1.29	585
WA0625400	WA06254V0	WA06254E0	1	16.5	1-11 1/2	-	-	-	2	2.80	1.42	1.89	1.14	1.61	71	36	48	29	41	1.29	585
WA0635400	WA06354V0	WA06354E0	1	16.5	-	-	M33x1.5	2	2.80	1.42	1.89	1.14	1.61	71	36	48	29	41	1.29	585	
WA0606400	WA06064V0	WA06064E0	1 1/4	20.5	-	1 1/4-11	-	-	2	3.82	2.00	2.36	1.45	2.16	97	50.9	60	37	55	3.22	1460
WA0626400	WA06264V0	WA06264E0	1 1/4	20.5	1 1/4-11 1/2	-	-	-	2	3.82	2.00	2.36	1.45	2.16	97	50.9	60	37	55	3.22	1460
WA0607400	WA06074V0	WA06074E0	1 1/2	25.8	-	1 1/2-11	-	-	2	4.29	2.24	2.64	1.22	2.48	109	56.9	67	31	63	4.50	2040
WA0627400	WA06274V0	WA06274E0	1 1/2	25.8	1 1/2-11 1/2	-	-	-	2	4.29	2.24	2.64	1.22	2.48	109	56.9	67	31	63	4.50	2040
WA0609400	WA06094V0	WA06094E0	2	34.7	-	2-11	-	-	2	5.08	2.73	3.07	1.32	2.80	129	69.4	78	33	71	7.05	3200
WA0629400	WA06294V0	WA06294E0	2	34.7	2-11 1/2	-	-	-	2	5.08	2.73	3.07	1.32	2.80	129	69.4	78	33	71	7.05	3200

* Alternative end connections available upon request.

To obtain connected length of coupling add dimensions A (Fig.1) and G (Fig. 2) together.

W6000 Series (Steel) Thread-to-Connect

Dust Plugs and Dust Caps

Body Size (in)	Socket Dust Plug Part Number Anodized Aluminium	Plug Dust Cap Part Number Anodized Aluminium
1/4	WD0611700	WD0611400
3/8	WD0612700	WD0612400
1/2	WD0613700	WD0613400
5/8	WD0614700	WD0614400
1	WD0615700	WD0615400
1 1/4	WD0616700	WD0616400
1 1/2	WD0617700	WD0617400
2	WD0619700	WD0619400

Socket Dust Plug



Plug Dust Cap

W6000 Series (Stainless Steel)

Thread-to-Connect



Eaton's W6000 Series stainless steel quick disconnect coupling is a thread-to-connect with a rugged construction. This quick disconnect coupling utilizes 1.4418 grade stainless steel, which guarantees the same mechanical resistance as the steel version while offering excellent resistance in corrosive environments. It remains the coupling of choice in offshore oil & gas applications but also covers a wide range of alternative hydraulic applications.

Product Features

- Proprietary profile
- Thread-to-connect with double shut-off valving
- Resistance to heavy mechanical loads (hydraulic shocks, severe pulsating pressures, etc.).
- Optional dust caps and plugs (made of anodized aluminium)
- Can be connected under residual pressure
- Standard seal material: FKM, EPDM
- Standard body material: Stainless steel 1.4418 (1.4404 AISI 316L stainless steel available on request at lower operating pressures. Please contact Eaton technical support for further information)

European Pressure Equipment Directive

Couplings with nominal diameters up to and including 25 mm are designed and manufactured under Article 3.3 of the European Pressure Equipment Directive 97/23 EC. Couplings with nominal diameters greater than 25 mm are designed and manufactured in accordance with the stipulations of Module A of the European Pressure Equipment Directive 97/23 EC. They should not be used to convey unstable gases.

Group 1 = Hazardous media /
Group 2 = Other media

Physical Characteristics

Body Size (in)	Nominal Flow Diameter (mm)	Max. Operating Pressure*				Maximum Residual Pressure during Connection***	Rated Flow** (lpm)	Fluid Loss (gpm)	Fluid Loss ml-cc.
		Non hazardous liquids & gases Group 2 (bar)	Non hazardous liquids & gases Group 1 (bar)	(psi)	(psi)				
1/4	5.7	1100	15,950	1100	15,950	30	435	11.6	3.06
3/8	7.6	750	10,875	750	10,875	30	435	16.7	4.41
1/2	10.3	750	10,875	750	10,875	30	435	25.5	6.74
3/4	14.2	650	9,425	650	9,425	50	725	55	14.53
1	16.5	450	6,525	450	6,525	30	435	87	22.98
1 1/4	20.5	450	6,525	450	6,525	30	435	140	36.98
1 1/2	25.8	300	4,350	38	550	30	435	208	54.95
2	34.7	300	4,350	28	405	30	435	357	94.30
									81.0

* For pulsating pressures when disconnected apply a multiplier of 0.5


** Indicated values refer to a 1 bar/14.5 psi pressure drop.

*** When connecting under pressure, the socket nut thread must be lubricated.

Applications & Markets

- Construction
- Oil & Gas
- Material handling
- All industrial and severe applications
- Systems subject to heavy mechanical loads, high pressures

Flow Data

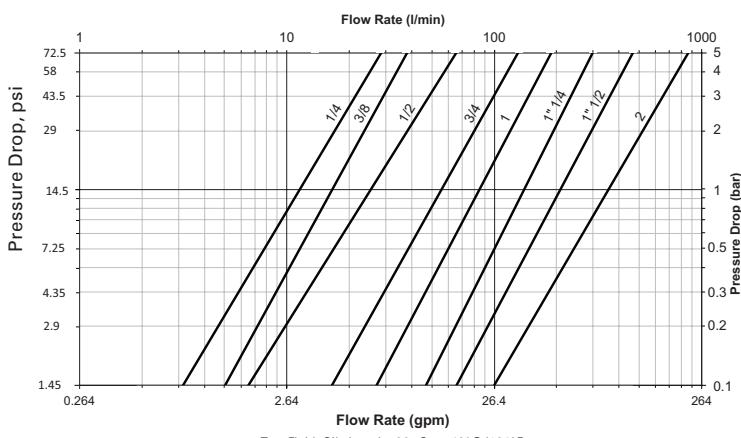

Seal Elastomer Data*

Seal Elastomer	Max. Operation Temperature Range
FKM	-20°C +200°C/-4°F +392°F
EPDM (Ethylene-Propylene)	-40°C +150°C/-40°F +302°F

* For reference only, based on Eaton recommended temperatures.
Contact Eaton technical support for further information on fluid compatibility.

W6000 Series (Stainless Steel) Thread-to-Connect

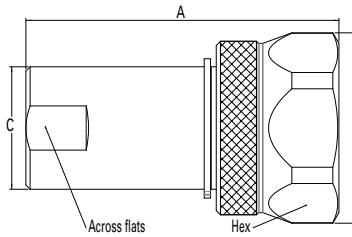


Figure 1

Sockets (Female)

Part Number*	FKM	EPDM	Nominal Body Flow Diameter		Thread Size** (Female)	Dimensions								Weight					
			(in)	(mm)		NPT	BSPP	Fig.	A (in)	B (in)	C (in)	Across Flats (in)	Hex (in)	A (mm)	B (mm)	C (mm)	Across Flats (mm)	Hex (mm)	lbs
WV06017V0		WV06017E0	1/4	5.7	-	1/4-19	1	2.09	1.38	0.83	0.75	1.26	53	35	21	19	32	0.32	144
WV06217V0		WV06217E0	1/4	5.7	1/4-18	-	1	2.09	1.38	0.83	0.75	1.26	53	35	21	19	32	0.32	144
WV06027V0		WV06027E0	3/8	7.6	-	3/8-19	1	2.56	1.50	0.98	0.90	1.38	65	38	25	23	35	0.48	217
WV06227V0		WV06227E0	3/8	7.6	3/8-18	-	1	2.56	1.50	0.98	0.90	1.38	65	38	25	23	35	0.48	217
WV06037V0		WV06037E0	1/2	10.3	-	1/2-14	1	2.91	1.77	1.14	1.06	1.61	74	45	29	27	41	0.71	320
WV06237V0		WV06237E0	1/2	10.3	1/2-14	-	1	2.91	1.77	1.14	1.06	1.61	74	45	29	27	41	0.71	320
WV06047V0		WV06047E0	3/4	14.2	-	3/4-14	1	3.58	2.16	1.50	1.38	1.97	91	55	38	35	50	1.32	600
WV06247V0		WV06247E0	3/4	14.2	3/4-14	-	1	3.58	2.16	1.50	1.38	1.97	91	55	38	35	50	1.32	600
WV06057V0		WV06057E0	1	16.5	-	1-11	1	4.05	2.72	1.81	1.61	2.56	103	69	46	41	65	2.41	1092
WV06257V0		WV06257E0	1	16.5	1-11 1/2	-	1	4.05	2.72	1.81	1.61	2.56	103	69	46	41	65	2.41	1092
WV06067V0		WV06067E0	1 1/4	20.5	-	1 1/4-11	1	5.71	3.50	2.36	2.16	3.03	145	89	60	55	77	6.13	2780
WV06267V0		WV06267E0	1 1/4	20.5	1 1/4-11 1/2	-	1	5.71	3.50	2.36	2.16	3.03	145	89	60	55	77	6.13	2780
WV06077V0		WV06077E0	1 1/2	25.8	-	1 1/2-11	1	6.81	3.94	2.64	2.48	3.46	173	100	67	63	88	9.26	4200
WV06277V0		WV06277E0	1 1/2	25.8	1 1/2-11 1/2	-	1	6.81	3.94	2.64	2.48	3.46	173	100	67	63	88	9.26	4200
WV06097V0		WV06097E0	2	34.7	-	2-11	1	8.07	4.60	3.07	2.80	4.13	205	117	78	71	105	14.64	6640
WV06297V0		WV06297E0	2	34.7	2-11 1/2	-	1	8.07	4.60	3.07	2.80	4.13	205	117	78	71	105	14.64	6640

* 1.4404 AISI 316L stainless steel available on request. Please contact Eaton technical support for further information.

** Alternative end connections available upon request.

To obtain connected length of coupling add dimensions A (Fig.1) and G (Fig. 2) together.




Figure 2

Plugs (Male)

Part Number*	FKM	EPDM	Nominal Body Flow Diameter		Thread Size** (Female)	Dimensions								Weight					
			(in)	(mm)		NPT	BSPP	Fig.	D (in)	E (in)	F (in)	G (in)	Across Flats (in)	D (mm)	E (mm)	F (mm)	G (mm)	Across Flats (mm)	Ibs
WV06014V0		WV06014E0	1/4	5.7	-	1/4-19	2	1.38	0.59	0.90	0.45	0.75	35	15	23	11.5	19	0.16	71
WV06214V0		WV06214E0	1/4	5.7	1/4-18	-	2	1.38	0.59	0.90	0.45	0.75	35	15	23	11.5	19	0.16	71
WV06024V0		WV06024E0	3/8	7.6	-	3/8-19	2	1.65	0.75	1.02	0.52	0.90	42	19	26	13	23	0.23	104
WV06224V0		WV06224E0	3/8	7.6	3/8-18	-	2	1.65	0.75	1.02	0.52	0.90	42	19	26	13	23	0.23	104
WV06034V0		WV06034E0	1/2	10.3	-	1/2-14	2	1.97	0.87	1.26	0.77	1.06	50	22	32	19.5	27	0.36	165
WV06234V0		WV06234E0	1/2	10.3	1/2-14	-	2	1.97	0.87	1.26	0.77	1.06	50	22	32	19.5	27	0.36	165
WV06044V0		WV06044E0	3/4	14.2	-	3/4-14	2	2.48	1.14	1.65	1.02	1.38	63	29	42	26	35	0.84	382
WV06244V0		WV06244E0	3/4	14.2	3/4-14	-	2	2.48	1.14	1.65	1.02	1.38	63	29	42	26	35	0.84	382
WV06054V0		WV06054E0	1	16.5	-	1-11	2	2.80	1.42	1.89	1.14	1.61	71	36	48	29	41	1.29	585
WV06254V0		WV06254E0	1	16.5	1-11 1/2	-	2	2.80	1.42	1.89	1.14	1.61	71	36	48	29	41	1.29	585
WV06064V0		WV06064E0	1 1/4	20.5	-	1 1/4-11	2	3.82	2.00	2.36	1.45	2.16	97	50.9	60	37	55	3.22	1460
WV06264V0		WV06264E0	1 1/4	20.5	1 1/4-11 1/2	-	2	3.82	2.00	2.36	1.45	2.16	97	50.9	60	37	55	3.22	1460
WV06074V0		WV06074E0	1 1/2	25.8	-	1 1/2-11	2	4.29	2.24	2.64	1.22	2.48	109	56.9	67	31	63	4.50	2040
WV06274V0		WV06274E0	1 1/2	25.8	1 1/2-11 1/2	-	2	4.29	2.24	2.64	1.22	2.48	109	56.9	67	31	63	4.50	2040
WV06094V0		WV06094E0	2	34.7	-	2-11	2	5.08	2.73	3.07	1.32	2.80	129	69.4	78	33.5	71	7.05	3200
WV06294V0		WV06294E0	2	34.7	2-11 1/2	-	2	5.08	2.73	3.07	1.32	2.80	129	69.4	78	33.5	71	7.05	3200

* 1.4404 AISI 316L stainless steel available on request. Please contact Eaton technical support for further information.

** Alternative end connections available upon request.

To obtain connected length of coupling add dimensions A (Fig.1) and G (Fig. 2) together.

W6000 Series (Stainless Steel) Thread-to-Connect

Dust Plugs and Dust Caps

Body Size (in)	Socket Dust Plug Part Number Anodized Aluminium	Plug Dust Cap Part Number Anodized Aluminium
1/4	WD0611700	WD0611400
5/16	WD0612700	WD0612400
1/2	WD0613700	WD0613400
3/4	WD0614700	WD0614400
1	WD0615700	WD0615400
1 1/4	WD0616700	WD0616400
1 1/2	WD0617700	WD0617400
2	WD0619700	WD0619400

Socket Dust Plug



Plug Dust Cap

HP3 Series



Eaton's HP3 Series Hydraulic Jack/Enerpac Interchange is designed for high pressure applications up to 700 bar (10,000 psi).

Product Features

- Thread together design
- 700 bar (10,000 psi) operating pressure
- Ball valve
- Seal material: Buna-N
- Body material: High resistance carbon steel with zinc trivalent chromate plating

Applications & Markets

- Hydraulic jack
- Portable hydraulic rams

Physical Characteristics

Body Size (in)	Max. Operating Pressure (Static)			Min. Burst Pressure			Rated Flow (lpm)	(gpm)
	Connected	Connected	Connected	Connected	Connected	Connected		
3/8	700	10,000		1,850	26,800		23	6

* Connect and disconnect under pressure not allowed

Dimensions

Part Number	Coupling Type	Body Size	Port Size	Thread	Type	Fig.	Dimensions				
							A mm (in)	B mm (in)	C mm (in)	D mm (in)	Hex ①
HP3SB37M	Socket/Female	3/8	3/8	3/8-18	Male NPT	1	72.2 (2.84)	35.0 (1.38)	24 (1.38)	.94 (1.38)	
HP3PB37F	Plug/Male	3/8	3/8	3/8-18	Female NPT	2	40.0 (1.57)	35.0 (1.38)	32 (1.38)	1.26 (1.38)	




Figure 1




Figure 2

Dust Caps and Dust Plugs

Body Size	Dust Cap	Dust Plug
3/8	WA5612400	WA5612700



W56000 Series



Eaton's W56000 Series is a screw to connect coupling designed to operate at pressures exceeding 10,000 psi or 700 bar. Rugged design makes these couplings suitable for hydraulic jacks and lift loading.

Product Features

- Screw to connect double shut off with poppet valve
- Designed and manufactured under Article 3.3 of the European Pressure Equipment Directive 97/23 EC.
- Interchanges with other couplings with the same profile
- Standard body material: Zinc trivalent plated steel
- Standard seal material: Buna-N

Physical Characteristics

Coupling Size	DN/ND	Max. Operating Pressure	Min. Burst Pressure	Rated Flow	Air Inclusion	
(in)		(bar)	(psi)	(lpm)	(gpm)	ml max
1/4	5.7	700	10,000	2,800	40,000	11
3/8	7.6	700	10,000	2,800	40,000	16

Applications & Markets

- Hydraulic jacks, Lifts and Emergency Rescue Equipment




Figure 1





Figure 2

Flow Data

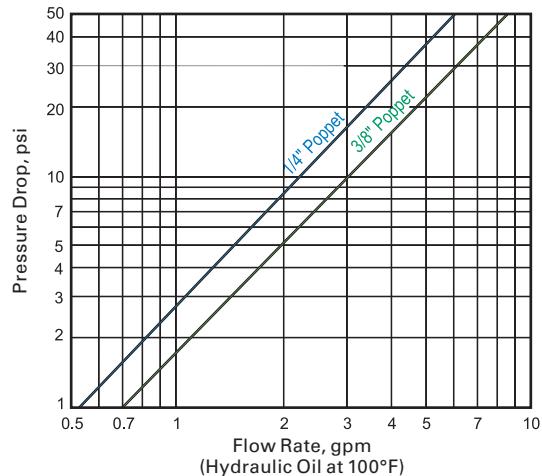

Part Number	DN/ND	Body Size	Coupling Type	Connection	Fig.	Dimensions					
						A (in)	B (in)	Hex (in)	A (mm)	B (mm)	Hex (mm)
WA5651700	5.7	1/4	Socket/Female	1/4 NPT Male	1	2.36	1.12	.88	60	28.5	22
WA5652700	7.6	3/8	Socket/Female	3/8 NPT Male	1	2.76	1.38	1.06	70	35	27
Part Number	DN/ND	Socket/Female	Coupling Type	Connection	Fig.	Dimensions					
						C (in)	D (in)	Hex (in)	C (mm)	D (mm)	Hex (mm)
WA5651400	5.7	1/4	Plug/Male	1/4 NPT Female	2	1.26	1.10	.75	35	15.9	19
WA5652400	7.6	3/8	Plug/Male	3/8 NPT Female	2	1.52	1.26	.91	42	19	23

Dust Caps and Dust Plugs

Body Size	Dust Cap	Dust Plug
1/4	WA5611400	WA5611700
3/8	WA5612400	WA5612700



FD35 Series

10,000 psi Ball Latch



Eaton's FD35 Series ball latch has a greater surface contact area for long surface life in rugged high pressure applications. The maximum operating pressure is 10,000 psi.

Product Features

- Safety sleeve lock prevents accidental disconnection
- Heavy duty back-up ring prevents O-Ring extrusion
- Heat treated and plated steel for greater wear and corrosion resistance
- Self-sealing poppet valves provide excellent high and low pressure sealing
- Standard seal material: FKM
- Standard body material: High resistance carbon steel with zinc trivalent plating

Physical Characteristics


Body Size	Max. Operating Pressure	Min. Burst Pressure	Vacuum Connected Only	Rated Flow	Air Inclusion	Fluid Loss			
	(bar)	(psi)	(bar)	(psi)	(in./Hg)	(lpm)	(gpm)	cc. max.	cc.max.
3/8	700	10,000	2,800	40,000	28	8	2	0.50	0.50

Applications & Markets


- 10,000 psi hydraulic applications
- Hydraulic tool
- Hydraulic ram and work loading

Flow Data

Pressure Drop Versus Flow Graph

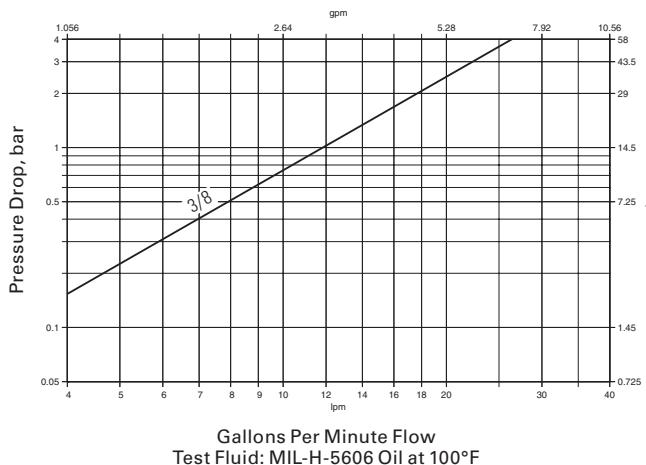

FD35 Series 10,000 psi

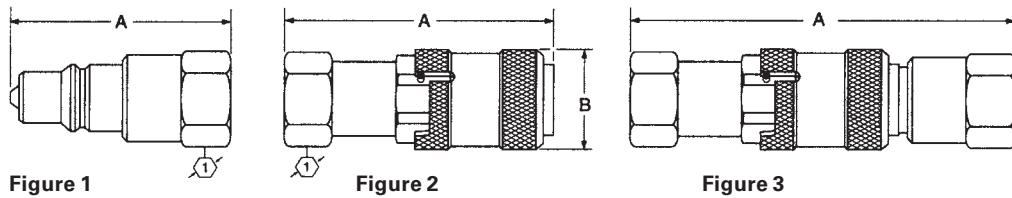

Dimensions (Female NPT, Valved)

Part Number	Coupling Type	Body Size	Port Size	Thread	Type	Fig.	Dimensions				
							A	B	Hex ①		
mm	(in)	mm	(in)	mm	(in)	mm	(in)	mm	(in)		
FD35-1002-06-06	Plug/Male	3/8	3/8	3/8-18	Female NPT	1	53.8	(2.12)	-	-	23.9 (.94)
FD35-1001-06-06	Socket/Female	3/8	3/8	3/8-18	Female NPT	2	65.0	(2.56)	32.3	(1.27)	23.9 (.94)
FD35-1000-06-06	Complete	3/8	3/8	3/8-18	Female NPT	3	89.9	(3.54)	-	-	-

Dimensions (Female SAE O-Ring, Valved)

Part Number	Coupling Type	Body Size	Port Size	Thread	Type	Fig.	Dimensions				
							A	B	Hex ①		
mm	(in)	mm	(in)	mm	(in)	mm	(in)	mm	(in)		
FD35-1008-06-06	Plug/Male	3/8	9/16	9/16-18	Female SAE O-Ring	1	53.8	(2.12)	-	-	23.9 (.94)
FD35-1007-06-06	Socket/Female	3/8	9/16	9/16-18	Female SAE O-Ring	2	65.0	(2.56)	32.3	(1.27)	23.9 (.94)
FD35-1006-06-06	Complete	3/8	9/16	9/16-18	Female SAE O-Ring	3	89.9	(3.54)	-	-	-

Dimensions (Female SAE O-Ring, 125 PSI Bleed Valve)

Part Number	Coupling Type	Body Size	Port Size	Thread	Type	Fig.	Dimensions		
							A	Hex ①	
mm	(in)	mm	(in)	mm	(in)	mm	(in)	mm	(in)
FD35-1052-06-06	Plug/Male	3/8	9/16	9/16-18	Female SAE O-Ring	1	53.8	(2.12)	23.9 (.94)

Note: Incorporates a special relief valve set at 125 psi, preventing disconnected pressure build-up.

Dust Cap/Plug

Part Number	Body Size
FD35-1042-06	3/8

Note: Fits male and female halves



Dust Cap/Plug

2UH Series



Eaton's 2UH Series quick disconnect coupling is a ball latch coupling used in high pressure hydraulic applications exceeding 20,000 psi or 1,500 bar.

Product Features

- Pull-to-connect high pressure coupling
- Standard body material: High tensile steel with anticorrosion finish, hardened steel sleeve
- Standard seal material: NBR
- Blue PVC Dust caps and plugs

Physical Characteristics

Coupling Size (in)	DN/ND	Max. Operating Pressure (bar)	Max. Operating Pressure (psi)	Rated Flow (lpm)	Rated Flow (gpm)	Spillage ml max
1/4	2.5	1,500	21,750	3	0.79	0.005

Applications & Markets

- High pressure hydraulic equipment: Lifts, jacks, shears, pullers

Flow Data


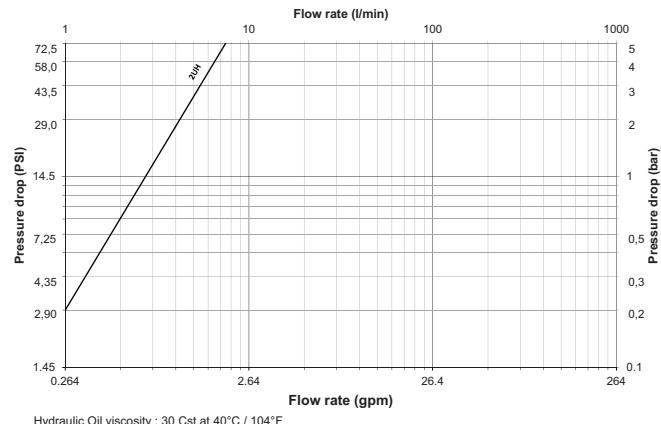


Figure 1




Figure 2

Dimensions

Size (in)	DN/ND	Socket/Female and Dust Plug	Socket/Female Dust Plug Only	Coupling Type	Connection	Fig.	A (mm)	B (mm)	C (mm)	Hex (mm)	
1/4	2.5	2UHS25BS 2UHS25	PSDC2UH	Socket/Female	G 1/4 1/4 NPT	1	60	12	27	24	
Size (in)	DN/ND	Socket/Female and Dust Plug	Socket/Female Dust Plug Only	Coupling Type	Connection	Fig.	D (mm)	E (mm)	F (mm)	G (mm)	Hex (mm)
1/4	2.5	2UHP25BS 2UHP25	PPDC2UH	Plug/Male	G 1/4 1/4 NPT	2	38	12	15.6	19.6	24

Synoptique de fonctionnement

Operation

ELIMINATION OF HOSE-WHIP with two distinct movements:

1 Button pressed

► Dissipation of downstream pressure:
the plug is retained in the socket

2 Plug pushed into the socket

► Disconnection



Coupling connected



The button is pressed



The plug is retained in the socket:
dissipation of downstream pressure



The plug is pushed towards the socket



Disconnection

Recommendation applicable to all profiles

Use with vibrating tools:
A flexible hose at least 300 mm long between the tool and the quick coupling is recommended.

Safeline Series

ISO 6150 B GD10500 Safety-Type Quick-Release



Eaton's Safeline Series is an Industrial Interchange pneumatic coupling with push button safety feature designed for use with compressed air. Two-step disconnect procedure shuts off air supply and releases downstream air pressure before plug can be removed from socket/female, which prevents hose whip.

Product Features

- Safe and easy to connect and disconnect
- Accepts 1/4" ISO 6150 Series B and A-A-59439 plugs/males
- Light weight, compact ergonomic design
- Accepts all US industrial plugs/males
- Standard body material: Aluminum
- Standard seal material: Buna-N

Physical Characteristics

Body Size	Nominal Flow Diameter	Max. Operating Pressure Connected or Disconnected	Air Flow Rate* Δp 0.6 bar/8.7 psi**	Δp 1 bar/14.5 psi***	Working Temperature
(mm)	(bar)	(psi)	(lpm)	(gpm)	°C °F
1/4	5.5	16	232	525	139 -20° +100° -4° +212°

*Indicated values refer to an inlet pressure of 6 bar / 87 psi.


**This flow rate allows the optimum output from a pneumatic tool.

*** This flow rate is the maximum recommended for a suitable output from a pneumatic tool. For applications needing higher flow rates, it is recommended to select a larger size coupling.

Applications & Markets

- General Pneumatics
- Air Tools
- Industrial Plants
- Maintenance and Repair

Flow Data

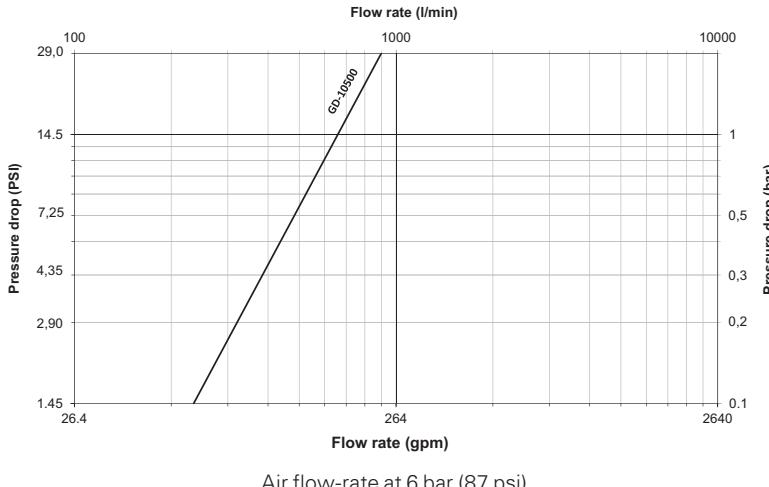

Safeline Series

ISO 6150 B GD10500 Safety-Type Quick-Release

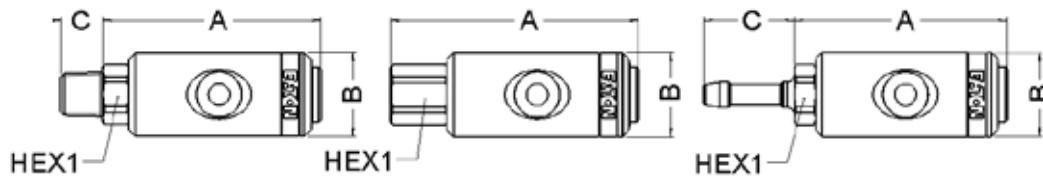


Figure 1

Figure 2

Figure 3

Sockets (Female)

Part Number	Body Size	Port Size	Thread or Hose Diam.	Type	Fig.	Dimensions								Hex1 Weight (lbs) (g)
						A (in)	B (in)	C (in)	Hex1 (in)	Hex2 (in)	A (mm)	B (mm)	C (mm)	
GD1053615	1/4	1/4		Male BSPP	1	2.57	1.02	0.47	0.75		65.3	26.0	12.0	19 0.24 110
GD1053614	1/4	1/4		Male BSPT	1	2.65	1.02	0.51	0.67		67.3	26.0	13.0	17 0.24 109
GD1053641	1/4	1/4		Male NPT	1	2.65	1.02	0.59	0.67		67.2	26.0	15.1	17 0.24 110
GD1053639	3/8	3/8		Male BSPP	1	2.61	1.02	0.47	0.87		66.3	26.0	12.0	22 0.27 124
GD1053638	3/8	3/8		Male BSPT	1	2.65	1.02	0.57	0.67		67.3	26.0	14.5	17 0.26 117
GD1053683	3/8	3/8		Male NPT	1	2.62	1.02	0.60	0.75		66.5	26.0	15.3	19 0.27 121
GD1053613	1/2	1/2		Male BSPP	1	2.69	1.02	0.55	1.06		68.3	26.0	14.0	27 0.33 148
GD1053612	1/2	1/2		Male BSPT	1	2.61	1.02	0.67	0.87		66.3	26.0	17.0	22 0.34 156
GD1053621	1/2	1/2		Male NPT	1	2.61	1.02	0.79	0.87		66.3	26.0	20.0	22 0.30 137
GD1052614	1/4	1/4		Female BSPP	2	2.33	1.02	0.00	0.67		76.8	26.0		17 0.24 109
GD1052641	1/4	1/4		Female NPT	2	2.33	1.02	0.00	0.67		76.3	26.0		17 0.24 109
GD1052638	3/8	3/8		Female BSPP	2	3.14	1.02	0.00	0.87		79.8	26.0		22 0.29 132
GD1052683	3/8	3/8		Female NPT	2	3.08	1.02	0.00	0.87		78.3	26.0		22 0.29 132
GD1052612	1/2	1/2		Female BSPP	2	3.30	1.02	0.00	1.06		83.8	26.0		27 0.34 155
GD1052621	1/2	1/2		Female NPT	2	3.24	1.02	0.00	1.06		82.3	26.0		27 0.35 157
GD1055667	-	6 mm		Reusable Hose Fit.	3	2.59	1.02	1.10	0.67		65.8	26.0	28.0	17 0.23 106
GD1055678	-	7 mm		Reusable Hose Fit.	3	2.57	1.02	1.10	0.67		65.8	26.0	28.0	17 0.24 107
GD1055689	-	8 mm		Reusable Hose Fit.	3	2.33	1.02	1.10	0.67		65.8	26.0	28.0	17 0.24 107
GD1055690	-	9 mm		Reusable Hose Fit.	3	2.33	1.02	1.10	0.67		65.8	26.0	28.0	17 0.24 108
GD1055601	-	10 mm		Reusable Hose Fit.	3	2.33	1.02	1.10	0.67		65.8	26.0	28.0	17 0.25 112

To obtain connected length of coupling add Dimensions A or A+C (Fig. 1, 2, 3) and D or D+E (Fig. 4, 5, 6, 7, 8) together and subtract 23 mm (0.91 in).

*Alternative end connections available upon request.

Safeline Series

ISO 6150 B GD10500 Safety-Type Quick-Release




Figure 4




Figure 5




Figure 6




Figure 7




Figure 8

Plugs (Male)

Part Number	Body Size	Port Size	Thread or Hose Diam.	Type	Dimensions										Weight (lbs) (g)	
					Fig.	D (in)	E (in)	F (in)	Hex1 (in)	Hex2 (in)	D (mm)	E (mm)	F (mm)	Hex1 (mm)	Hex2 (mm)	
GA0066318	1/8	1/8-28	Male BSPT		4	1.260	0.354		0.472		32	9		12		0.04189 19
GA0066314	1/4	1/4-19	Male BSPT		4	1.260	0.512		0.551		32	13		14		0.06 25
10	1/4	1/4-18	Male NPT		4	1.220	0.551		0.591		31	14		15		0.06 25
GA0066338	3/8	3/8-19	Male BSPT		4	1.260	0.591		0.669		32	15		17		0.08 38
GA0066345	M14	M14x125	Male Metric		4	1.260	0.512		0.551		32	13		14		0.06 26
GA0066214	1/4	1/4-19	Female BSPP		5	1.732			0.669		44			17		0.07 30
11	1/4	1/4-18	Female NPT		5	1.634			0.709		41.5			18		0.07 30
GA0066238	3/8	3/8-19	Female BSPP		5	1.732			0.827		44			21		0.08 37
GA0066245	M14	M14x125	Female Metric		5	1.732			0.669		44			17		0.06 25
GA0066248	1/4	–	M14x125	Female Metric	5	1.732			0.551		44			14		0.05 24
GA0066767	–	6 mm	Hose Tail		6	1.102	1.024	0.551			28	26	14			0.04 19
GA0066778	–	7 mm	Hose Tail		6	1.102	1.024	0.551			28	26	14			0.04 20
GA0066789	–	8 mm	Hose Tail		6	1.102	1.024	0.551			28	26	14			0.04 20
GA0066790	–	9 mm	Hose Tail		6	1.102	1.024	0.551			28	26	14			0.04 20
GA0066701	–	10 mm	Hose Tail		6	1.102	1.024	0.551			28	26	14			0.05 22
GA0066174	–	7x14 mm	Reusable Hose Fit.		7	2.224			0.630	0.748	56.5			16	19	0.12 56
GA0066184	–	8x14 mm	Reusable Hose Fit.		7	2.224			0.630	0.748	56.5			16	19	0.13 57
GA0066185	–	8x15 mm	Reusable Hose Fit.		7	2.224			0.630	0.748	56.5			16	19	0.12 53
GA0066196	–	9x16 mm	Reusable Hose Fit.		7	2.224			0.630	0.748	56.5			16	19	0.11 51
GA0066814	1/4	1/4-19	Female BSPP Swivel		8	1.496			0.669		38			17		0.06 26
GA0066845	M14	M14x125	Female Metric Swivel		8	1.496			0.669		38			17		0.06 26

To obtain connected length of coupling add Dimensions A or A+C (Fig. 1, 2, 3) and D or D+E (Fig. 4, 5, 6, 7, 8) together and subtract 23 mm (0,91 in).

*Alternative end connections available upon request.

Safeline Series

ISO 6150 B ID10900 Safety-Type Quick-Release



Eaton Gromelle™ ID10900 Series is a single shut-off compressed air coupling that interchanges with ISO 6150 C Standards requirements. Nominal diameter is 8 mm. Thanks to a distinct two-movement action, our couplings guarantee operator safety at disconnection by eliminating the "whiplash" effect. It is a must-have for safe air applications.

Product Features

- One-hand push-to-connect
- Automatic button for disconnection
- Meets safety standard ISO 4414
- Single shut-off valving
- Good flow capacity
- Wide selection of end connections
- Standard seal material: NBR (Nitrile)

- Standard body material (Female): Aluminum
- Standard body material (Male): Zinc plated steel

Physical Characteristics

Body Size	Nominal Flow Diameter	Max. Operating Pressure Connected or Disconnected	Air Flow Rate*	Working Temperature		
	(mm)	(bar)	(psi)	(lpm) (gpm)	(lpm) (gpm)	°C °F
3/8	8	16	232	1,590 420	2,000 528	-20° +100° -4° +212°

*Indicated values refer to an inlet pressure of 6 bar / 87 psi.


**This flow rate allows the optimum output from a pneumatic tool.

** This flow rate is the maximum recommended for a suitable output from a pneumatic tool. For applications needing higher flow rates, it is recommended to select a larger size coupling.

Applications & Markets


- General Pneumatics
- Air Tools

Flow Data

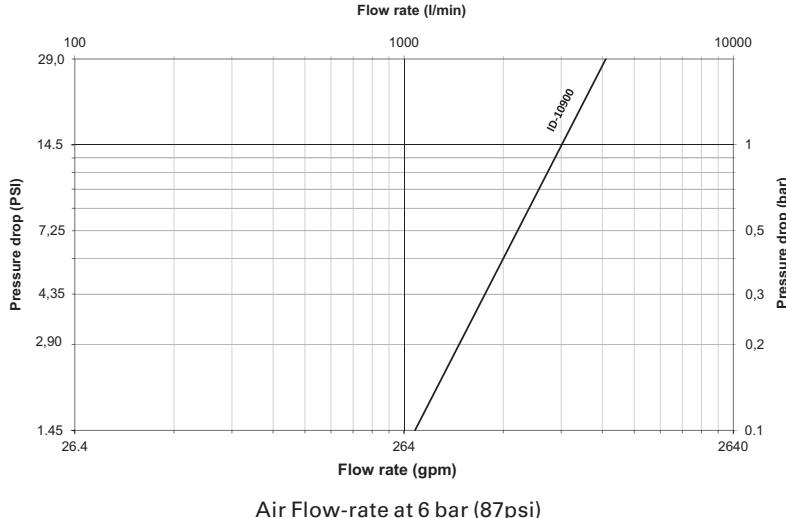

Safeline Series

ISO 6150 B ID10900 Safety-Type Quick-Release

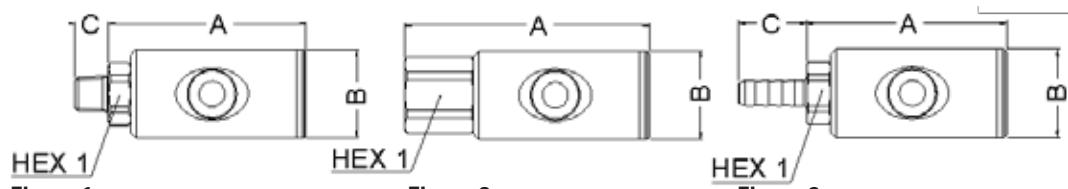

Sockets (Female)

Part Number	Body Size	Port Size	Thread or Hose Diam.	Type	Fig.	Dimensions								Weight
						A (in)	B (in)	C (in)	Hex1 (in)	A (mm)	B (mm)	C (mm)	Hex1 (mm)	(lbs) (g)
ID1096015		1/4	1/4	Male BSPP	1	3.0	1.3	0.5	0.87	76.2	34	11.9	22	0.47 214
ID1096014		1/4	1/4	Male BSPT	1	3.0	1.3	0.5	0.87	76.1	34	13	22	0.47 213
ID1096041		1/4	1/4	Male NPT	1	3.0	1.3	0.5	0.87	76	34	13	22	0.47 213
ID1096039		3/8	3/8	Male BSPP	1	3.0	1.3	0.5	0.87	76.20	34	11.9	22	0.48 218
ID1096038		3/8	3/8	Male BSPT	1	3.0	1.3	0.6	0.87	76.1	34	15	22	0.48 219
ID1096083		3/8	3/8	Male NPT	1	3.0	1.3	0.6	0.87	76.1	34	15	22	0.48 219
ID1096013		1/2	1/2	Male BSPP	1	3.0	1.3	0.5	1.06	76.2	34	13.9	27	0.52 238
ID1096012		1/2	1/2	Male BSPT	1	3.0	1.3	0.7	0.87	76.1	34	17	22	0.51 233
ID1096021		1/2	1/2	Male NPT	1	3.0	1.3	0.7	0.87	76.1	34	17	22	0.51 233
ID1097014	3/8	1/4	1/4	Female BSPP	2	3.5	1.3	—	0.87	88.1	34	—	22	0.51 233
ID1097041		1/4	1/4	Female NPT	2	3.5	1.3	—	0.87	88.10	34	—	22	0.51 233
ID1097038		3/8	3/8	Female BSPP	2	3.6	1.3	—	0.87	90.60	34	—	22	0.51 232
ID1097083		3/8	3/8	Female NPT	2	3.6	1.3	—	0.87	90.6	34	—	22	0.51 232
ID1097012		1/2	1/2	Female BSPP	2	3.7	1.3	—	1.06	94.1	34	—	27	0.59 267
ID1097021		1/2	1/2	Female NPT	2	3.7	1.3	—	1.06	94.1	34	—	27	0.59 269
ID1095678		—	7 mm	Hose Tail	3	3.0	1.3	1.1	0.87	77.1	34	28	22	0.47 215
ID1095689		—	8 mm	Hose Tail	3	3.0	1.3	1.1	0.87	77.1	34	28	22	0.48 216
ID1095690		—	9 mm	Hose Tail	3	3.0	1.3	1.1	0.87	77.1	34	28	22	0.48 218
ID1095601		—	10 mm	Hose Tail	3	3.0	1.3	1.1	0.87	77.1	34	28	22	0.48 219

To obtain connected length of coupling add dimensions A or A+C (Fig. 1, 2, 3) and D or D+E (Fig. 4, 5, 6) together and subtract 25.6 mm (1 in.).

*Alternative end connections available upon request.






Figure 4

Figure 5

Figure 6

Plugs (Male)

Part Number	Body Size	Port Size	Thread or Hose Diam.	Type	Fig.	Dimensions								Weight
						D (in)	E (in)	F (in)	Hex1 (in)	D (mm)	E (mm)	F (mm)	Hex1 (mm)	(lbs) (g)
IA0090614		1/4	1/4	Male BSPT	4	1.34	0.51	—	0.63	34.00	13.00	—	16.00	0.07 32.00
IA0090638		3/8	3/8	Male BSPT	4	1.42	0.59	—	0.67	36.00	15.00	—	17.00	0.09 41.00
IA0090612		1/2	1/2	Male BSPT	4	1.57	0.67	—	0.91	40.00	17.00	—	23.00	0.12 56.00
IA0090714		1/4	1/4	Female BSPP	5	1.97	—	—	0.67	50.00	—	—	17.00	0.08 38.00
IA0090738		3/8	3/8	Female BSPP	5	1.97	—	—	0.83	50.00	—	—	21.00	0.11 49.00
IA0090712	3/8	1/2	1/2	Female BSPP	5	2.09	—	—	1.02	53.00	—	—	26.00	0.15 69.00
IA0090978		—	7 mm	Hose Tail	6	1.30	1.02	0.63	—	33.00	26.00	16.00	—	0.07 30.00
IA0090989		—	8 mm	Hose Tail	6	1.30	1.02	0.63	—	33.00	26.00	16.00	—	0.07 30.00
IA0090990		—	9 mm	Hose Tail	6	1.30	1.02	0.63	—	33.00	26.00	16.00	—	0.07 31.00
IA0090901		—	10 mm	Hose Tail	6	1.30	1.02	0.63	—	33.00	26.00	16.00	—	0.07 32.00
IA0090912		—	11-12 mm	Hose Tail	6	1.30	1.22	0.63	—	33.00	31.00	16.00	—	0.08 38.00

To obtain connected length of coupling add dimensions A or A+C (Fig. 1, 2, 3) and D or D+E (Fig. 4, 5, 6) together and subtract 25.6 mm (1 in.).

*Alternative end connections available upon request.

Safeline Series

ISO 6150 C GD18500/GK18600



Product Features

- Safe and easy to connect and disconnect
- Light weight, compact ergonomic design
- Meets Safety Standard ISO 4414
- Meets ISO 6150 Series C Standard
- Standard body material: Dural
- Standard seal material: Buna-N

Physical Characteristics

Body Size	Nominal Flow Diameter	Max. Operating Pressure Connected or Disconnected	Air Flow Rate*	Δp 0.6 bar/8.7 psi**	Δp 1 bar/14.5 psi***	Working Temperature
1/4	(mm) 5.5	(bar) 16	(psi) 232	(lpm) 515	(gpm) 136	(lpm) 650 (gpm) 172 °C -20° +100° °F -4° +212°

*Indicated values refer to an inlet pressure of 6 bar / 87 psi.


**This flow rate allows the optimum output from a pneumatic tool.

** This flow rate is the maximum recommended for a suitable output from a pneumatic tool. For applications needing higher flow rates, it is recommended to select a larger size coupling.

Applications & Markets

- General Pneumatics
- Air Tools
- Industrial Plants
- Maintenance and Repair

Flow Data

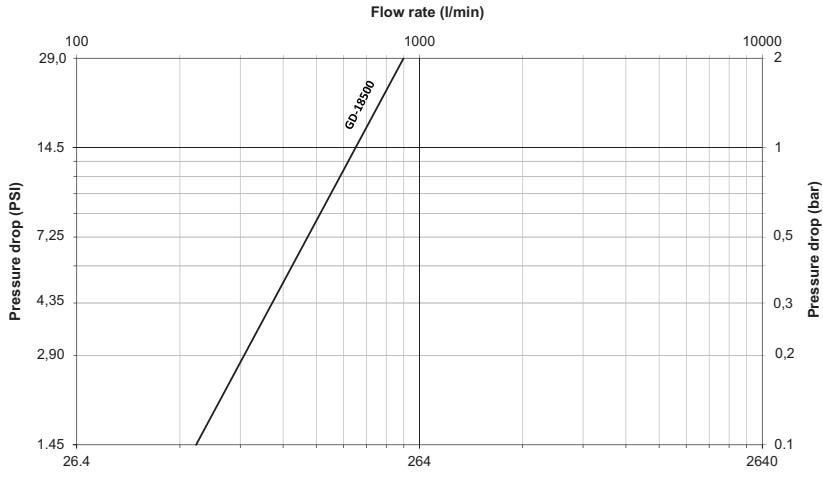

Air flow-rate at 6 bar (87 psi)

Safeline Series

ISO 6150 C GD18500/GK18600




Figure 1




Figure 2




Figure 3




Figure 4

Sockets (Female)

Part Number	Body Size	Port Size	Thread or Hose Diam.	Type	Fig.	Dimensions								Weight
						A	B	C	Hex1	A	B	C	Hex1	
GD1853615	1/4	1/4	Male BSPP		1	1.85	1.02	0.47	0.75	47	26	12	19	0.17 77
GD1853614	1/4	1/4	Male BSPT		1	1.93	1.02	0.51	0.67	49	26	13	17	0.17 76
GD1853639	3/8	3/8	Male BSPP		1	1.89	1.02	0.47	0.87	48	26	12	22	0.20 91
GD1853638	3/8	3/8	Male BSPT		1	1.93	1.02	0.57	0.67	49	26	14.5	17	0.19 84
GD1853613	1/2	1/2	Male BSPP		1	1.97	1.02	0.55	1.06	50	26	14	27	0.25 115
GD1853612	1/2	1/2	Male BSPT		1	1.89	1.02	0.67	0.87	48	26	17	22	0.27 123
GD1852614	1/4	1/4	Female BSPP		2	2.30	1.02		0.67	58.5	26	—	17	0.17 76
GD1852638	1/4	3/8	Female BSPP		2	2.42	1.02		0.87	61.5	26	—	22	0.22 99
GD1852612	1/2	1/2	Female BSPP		2	2.58	1.02		1.06	65.5	26	—	27	0.27 122
GD1855667	—	6 mm	Hose Tail		3	1.87	1.02	1.10	0.67	47.5	26	28	17	0.16 73
GD1855678	—	7 mm	Hose Tail		3	1.87	1.02	1.10	0.67	47.5	26	28	17	0.16 74
GD1855689	—	8 mm	Hose Tail		3	1.87	1.02	1.10	0.67	47.5	26	28	17	0.16 74
GD1855690	—	9 mm	Hose Tail		3	1.87	1.02	1.10	0.67	47.5	26	28	17	0.17 75
GD1855601	—	10 mm	Hose Tail		3	1.87	1.02	1.10	0.67	47.5	26	28	17	0.17 79
GD1855613	—	13 mm	Hose Tail		3	1.87	1.02	1.30	0.67	47.5	26	33	17	0.19 87
GD1855014	1/4	1/4	Female BSPP, Bulkhead*	4	4	1.83	1.02	0.67	1.06	46.5	26	17	27	0.25 112
GD1855038	3/8	3/8	Female BSPP, Bulkhead**	4	4	1.87	1.02	0.79	1.26	47.5	26	20	32	0.33 150

To obtain connected length of coupling add Dimensions A or A+C (Fig. 1, 2, 3, 4) and D or D+E (Fig. 5, 6, 7) together and subtract 26 mm (1.02 in).

*Max bulkhead thickness: 10 mm (0.39 in) / Bulkhead hole diameter = 21 mm (0.83 in).

**Max bulkhead thickness: 12 mm (0.47 in) / Bulkhead hole diameter = 25 mm (0.98 in)




Figure 5




Figure 6




Figure 7

Plugs (Male)

Part Number	Body Size	Port Size	Thread or Hose Diam.	Type	Fig.	Dimensions								Weight
						D	E	F	Hex1	Hex2	D	E	F	
GK1866319	1/8	1/8	Male BSPP		5	1.38	0.31		0.55		35	8	14	0.04 17
GK1866318	1/8	1/8	Male BSPT		5	1.34	0.31		0.47		34	8	12	0.03 14
GK1866381	1/8	1/8	Male NPT		5	1.34	0.39		0.47		34	10	12	0.03 15
GK1866315	1/4	1/4	Male BSPP		5	1.42	0.47		0.67		36	12	17	0.06 25
GK1866314	1/4	1/4	Male BSPT		5	1.40	0.51		0.55		35.5	13	14	0.05 23
GK1866341	1/4	1/4	Male NPT		5	1.42	0.59		0.67		36	15	17	0.07 30
GK1866339	3/8	3/8	Male BSPP		5	1.46	0.47		0.87		37	12	22	0.09 39
GK1866338	3/8	3/8	Male BSPT		5	1.48	0.47		0.75		37.5	12	19	0.08 37
GK1866218	1/8	1/8	Female BSPP	6	6	1.63			0.55		41.5		14	0.04 18
GK1866281	1/4	1/8	Female NPT	6	6	0.00			0.00					0.04 18
GK1866214	1/4	1/4	Female BSPP	6	6	1.97			0.67		50		17	0.07 33
GK1866241	1/4	1/4	Female NPT	6	6	1.97			0.67		50		17	0.07 32
GK1866238	3/8	3/8	Female BSPP	6	6	1.85			0.83		47		21	0.08 35
GK1866245	M 14	M 14 x 125	Female Metric	6	6	1.87			0.67		47.5		17	0.06 26
GK1866767	—	6 mm	Hose Tail		7	1.26	1.10	0.59			32	28	15	0.03 15
GK1866778	—	7 mm	Hose Tail		7	1.26	1.10	0.59			32	28	15	0.04 18
GK1866789	—	8 mm	Hose Tail		7	1.26	1.10	0.59			32	28	15	0.04 19
GK1866790	—	9 mm	Hose Tail		7	1.26	1.10	0.59			32	28	15	0.04 19
GK1866701	—	10 mm	Hose Tail		7	1.26	1.10	0.59			32	28	15	0.04 20
GK1866713	—	13 mm	Hose Tail		7	1.26	1.30	0.79			32	33	20	0.08 34

To obtain connected length of coupling add Dimensions A or A+C (Fig. 1, 2, 3, 4) and D or D+E (Fig. 5, 6, 7) together and subtract 26 mm (1.02 in).

Safeline Series

ISO 6150 C ID18900/IK18900



Product Features

- Safe and easy to connect and disconnect
- Light weight, compact ergonomic design
- Meets Safety Standard ISO 4414
- Meets ISO 6150 Series C Standard
- Standard body material: Dural
- Standard seal material: Buna-N

Physical Characteristics

Body Size	Nominal Flow Diameter	Max. Operating Pressure Connected or Disconnected	Air Flow Rate*	Δp 0.6 bar/8.7 psi**	Δp 1 bar/14.5 psi***	Working Temperature
3/8	(mm) 8	(bar) 16	(psi) 232	(lpm) 1,080	(gpm) 285	(lpm) 1,350 (gpm) 356 °C -20° +100° °F -4° +212°

*Indicated values refer to an inlet pressure of 6 bar / 87 psi.


**This flow rate allows the optimum output from a pneumatic tool.

** This flow rate is the maximum recommended for a suitable output from a pneumatic tool. For applications needing higher flow rates, it is recommended to select a larger size coupling.

Applications & Markets

- General Pneumatics
- Air Tools
- Industrial Plants
- Maintenance and Repair

Flow Data

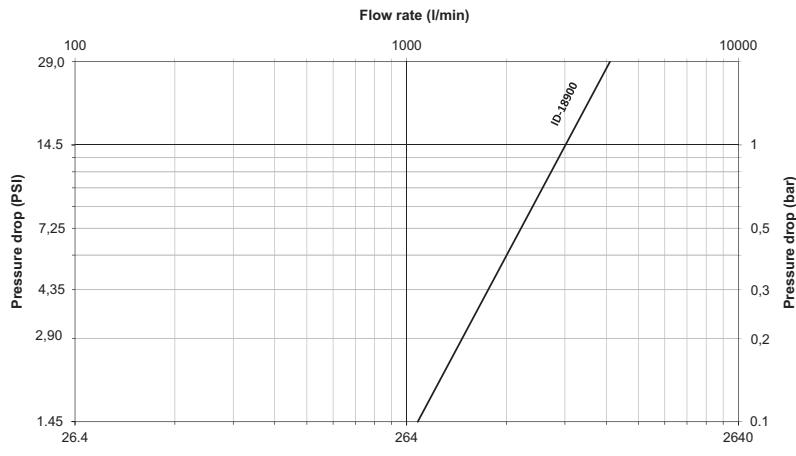

Air flow-rate at 6 bar (87 psi)

Safeline Series

ISO 6150 C ID18900/IK18900




Figure 1




Figure 2




Figure 3




Figure 4

Sockets (Female)

Part Number	Body Size	Port Size	Thread or Hose Diam.	Type	Fig.	Dimensions								Weight
						A (in)	B (in)	C (in)	Hex1 (in)	A (mm)	B (mm)	C (mm)	Hex1 (mm)	
ID1896015	1/4	1/4	Male BSPP		1	2.45	1.34	0.47	0.87	62	34	12	22	0.35 160
ID1896014	1/4	1/4	Male BSPT		1	2.45	1.34	0.51	0.87	62	34	13	22	0.36 162
ID1896039	3/8	3/8	Male BSPP		1	2.45	1.34	0.47	0.87	62	34	12	22	0.36 165
ID1896038	3/8	3/8	Male BSPT		1	2.45	1.34	0.59	0.87	62	34	15	22	0.37 168
ID1896013	1/2	1/2	Male BSPP		1	2.45	1.34	0.55	1.06	62	34	14	27	0.37 168
ID1896012	1/2	1/2	Male BSPT		1	2.45	1.34	0.67	0.87	62	34	17	22	0.40 180
ID1897014	1/4	1/4	Female BSPP		2	2.92	1.34	—	0.87	74	34	—	22	0.40 182
ID1897038	3/8	3/8	Female BSPP		2	3.02	1.34	—	0.87	77	34	—	22	0.40 180
ID1897012	1/2	1/2	Female BSPP		2	3.16	1.34	—	1.06	80	34	—	27	0.48 216
ID1895689	—	8 mm	Hose Tail		3	2.49	1.34	1.10	0.87	63	34	28	22	0.36 165
ID1895690	—	9 mm	Hose Tail		3	2.49	1.34	1.10	0.87	63	34	28	22	0.35 160
ID1895601	—	10 mm	Hose Tail		3	2.49	1.34	1.10	0.87	63	34	28	22	0.37 166
ID1895613	—	13 mm	Hose Tail		3	2.49	1.34	1.30	0.87	63	34	33	22	0.39 177
ID1895038	3/8	3/8	Female BSPP, Bulkhead*		4	2.37	1.34	0.79	1.26	60	34	20	32	0.52 235
ID1895012	1/2	3/8	Female BSPP, Bulkhead**		4	2.39	1.34	0.91	1.38	61	34	23	35	0.59 269

To obtain connected length of coupling add Dimensions A or A+C (Fig. 1, 2, 3, 4) and D or D+E (Fig. 5, 6, 7) together and subtract 40 mm (1,57 in).

*Max bulkhead thickness: 12 mm (0,47 in) / Bulkhead hole diameter = 25 mm (0,98 in)

**Max bulkhead thickness: 15 mm (0,59 in) / Bulkhead hole diameter = 31 mm (1,22 in)




Figure 5




Figure 6




Figure 7

Plugs (Male)

Part Number	Body Size	Port Size	Thread or Hose Diam.	Type	Fig.	Dimensions								Weight
						D (in)	E (in)	F (in)	Hex1 (in)	D (mm)	E (mm)	F (mm)	Hex1 (mm)	
IK1890615	1/4	1/4	Male BSPP		5	1.81	0.47	0.75	46	12	—	19	0.10 44	
IK1890614	1/4	1/4	Male BSPT		5	1.77	0.51	0.67	45	13	—	17	0.08 38	
IK1890641	1/4	1/4	Male NPT		5	1.77	0.51	0.67	45	13	—	17	0.09 39	
IK1890639	3/8	3/8	Male BSPP		5	1.81	0.47	0.87	46	12	—	22	0.11 51	
IK1890638	3/8	3/8	Male BSPT		5	1.77	0.59	0.75	45	15	—	19	0.11 51	
IK1890683	3/8	3/8	Male NPT		5	1.77	0.59	0.75	45	15	—	19	0.11 52	
IK1890613	1/2	1/2	Male BSPP		5	1.81	0.55	1.02	46	14	—	26	0.16 73	
IK1890612	1/2	1/2	Male BSPT		5	1.77	0.67	0.87	45	17	—	22	0.15 66	
IK1890714	1/4	1/4	Female BSPP		6	2.36	—	0.67	60	—	—	17	0.09 40	
IK1890741	1/4	1/4	Female NPT		6	2.36	—	0.67	60	—	—	17	0.09 40	
IK1890738	3/8	3/8	Female BSPP		6	2.36	—	0.83	60	—	—	21	0.11 52	
IK1890783	3/8	3/8	Female NPT		6	2.36	—	0.83	60	—	—	21	0.12 55	
IK1890712	1/2	1/2	Female BSPP		6	2.36	—	1.02	60	—	—	26	0.15 66	
IK1890989	—	8 mm	Hose Tail		7	1.65	1.10	0.63	42	28	16	—	0.07 33	
IK1890990	—	9 mm	Hose Tail		7	1.65	1.10	0.63	42	28	16	—	0.07 33	
IK1890901	—	10 mm	Hose Tail		7	1.65	1.10	0.63	42	28	16	—	0.08 35	
IK1890913	—	13 mm	Hose Tail		7	1.65	1.30	0.79	42	33	20	—	0.10 46	

To obtain connected length of coupling add Dimensions A or A+C (Fig. 1, 2, 3, 4) and D or D+E (Fig. 5, 6, 7) together and subtract 40 mm (1,57 in).

Safeline Series

ISO 6150 C TD18300/TK18300



Product Features

- Safe and easy to connect and disconnect
- Light weight, compact ergonomic design
- Meets Safety Standard ISO 4414
- Meets ISO 6150 Series C Standard
- Standard body material: Dural
- Standard seal material: Buna-N

Physical Characteristics

Body Size	Nominal Flow Diameter	Max. Operating Pressure Connected or Disconnected	Air Flow Rate*	Δp 0.6 bar/8.7 psi**	Δp 1 bar/14.5 psi***	Working Temperature
1/2	11	16 (psi)	2,400 (lpm)	634 (gpm)	3,000 (lpm)	793 °C -20° +100° °F -4° +212°

*Indicated values refer to an inlet pressure of 6 bar / 87 psi.


**This flow rate allows the optimum output from a pneumatic tool.

*** This flow rate is the maximum recommended for a suitable output from a pneumatic tool. For applications needing higher flow rates, it is recommended to select a larger size coupling.

Applications & Markets

- General Pneumatics
- Air Tools
- Industrial Plants
- Maintenance and Repair

Flow Data

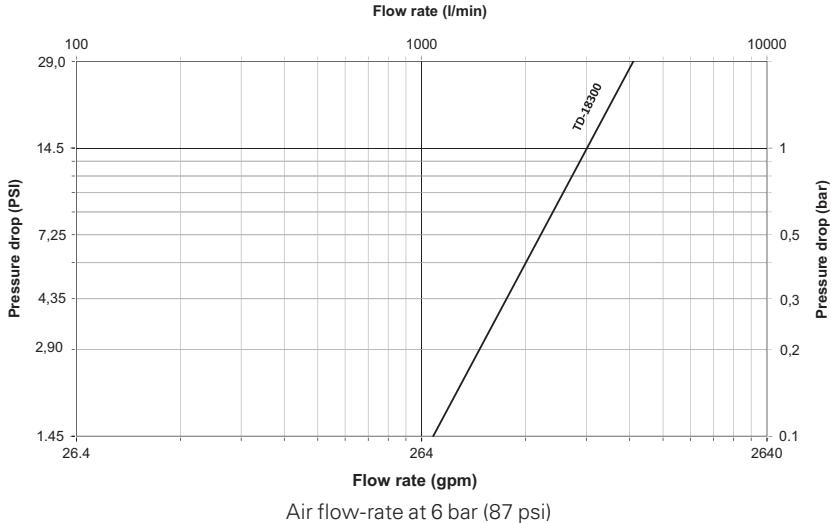

Safeline Series

ISO 6150 C TDI8300/TK18300




Figure 1




Figure 2




Figure 3




Figure 4

Sockets (Female)

Part Number	Body Size	Port Size	Thread or Hose Diam.	Type	Dimensions										Weight	
					Fig.	A	B	C	Hex1	Hex2	A	B	C	Hex1	Hex2	
(in)	(in)	(in)	(in)	(mm)	(in)	(mm)	(g)									
TD1832012	1/2	1/2	Male BSPT		1	2.78	1.56	0.67	1.06		70.6	39.5	17	27	0.58	262
TD1832034	3/4	3/4	Male BSPT		1	2.78	1.56	0.73	1.14		70.6	39.5	19	29	0.63	287
TD1832138	3/8	3/8	Female BSPP		2	3.27	1.56		1.06		83.1	39.5	-	27	0.62	280
TD1832112	1/2	1/2	Female BSPP		2	3.27	1.56		1.06		83.1	39.5	-	27	0.58	261
TD1832134	1/4	3/4	Female BSPP		2	3.51	1.56		1.26		89.1	39.5	-	32	0.67	304
TD1835601	-	10 mm	Hose Tail		3	2.84	1.56	1.10	1.06		72.1	39.5	28	27	0.56	256
TD1835613	-	13 mm	Hose Tail		3	2.84	1.56	1.30	1.06		72.1	39.5	33	27	0.59	267
TD1835616	-	16 mm	Hose Tail		3	2.84	1.56	1.30	1.06		72.1	39.5	33	27	0.60	270
TD1835012	1/2	1/2	Female BSPP, Bulkhead*		4	2.78	1.56	0.91	1.38		70.6	39.5	23	35	0.76	343
TD1835034	3/4	3/4	Female BSPP, Bulkhead**		4	2.82	1.56	0.98	1.50		71.6	39.5	25	38	0.77	350

To obtain connected length of coupling add Dimensions A or A+C (Fig. 1, 2, 3, 4) and D or D+E (Fig. 5, 6, 7) together and subtract 20 mm (0.79 in).

*Max bulkhead thickness: 15 mm (0.59 in) / Bulkhead hole diameter = 31 mm (1.22 in)

**Max bulkhead thickness: 16 mm (0.63 in) / Bulkhead hole diameter = 33 mm (1.30 in)




Figure 5




Figure 6




Figure 7

Plugs (Male)

Part Number	Body Size	Port Size	Thread or Hose Diam.	Type	Fig.	Dimensions										Weight
						D	E	F	Hex1	D	E	F	Hex1	(lbs)	(g)	
(in)	(in)	(in)	(in)	(mm)	(in)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(g)	
TK1831539	3/8	3/8	Male BSPP		5	2.01	0.47		0.87	51.1	11.9		22	2.32	59	
TK1831512	1/2	1/2	Male BSPT		5	1.97	0.67		0.87	50	17		22	2.56	65	
TK1831534	3/4	3/4	Male BSPT		5	2.11	0.73		1.14	53.5	18.5		29	3.86	98	
TK1831638	3/8	3/8	Female BSPP		6	2.56			1.02	65			26	3.70	94	
TK1831612	1/4	1/2	Female BSPP		6	2.56			1.02	65			26	3.02	77	
TK1831634	3/4	3/4	Female BSPP		6	2.87			1.26	73			32	5.02	128	
TK1831889	-	8 mm	Hose Tail		7	1.85	1.10	0.79		47	28	20		1.87	48	
TK1831801	-	10 mm	Hose Tail		7	1.85	1.10	0.79		47	28	20		1.91	48	
TK1831813	-	13 mm	Hose Tail		7	1.85	1.30	0.79		47	33	20		2.19	56	
TK1831816	-	16 mm	Hose Tail		7	1.85	1.30	0.79		47	33	20		2.40	61	

To obtain connected length of coupling add Dimensions A or A+C (Fig. 1, 2, 3, 4) and D or D+E (Fig. 5, 6, 7) together and subtract 20 mm (0.79 in).

CC Series



Product Features

- Two sleeve activation for safety
- Safe choice for employees due to safety venting that prevents hose whip
- External polymer construction prevents scratches on finished surfaces
- Accepts multiple plug/male configurations, making it extremely flexible

Eaton's CC Series provides unrestricted air flow, safety, efficiency, and extreme durability all in one pneumatic coupling.

Physical Characteristics

Series	Body Size	Max. Operating Pressure	Min. Burst Pressure	Rated Flow	
	(in)	(bar)	(psi)	(lpm)	(gpm)
2CC	1/4	17	250	138	2,000
3CC	3/8	17	250	138	2,000
24CC	1/4	17	250	138	2,000

Applications & Markets

- General Pneumatics
- Air Tools

Interchangeability

2CC	24CC	3CC
Industrial	CEJN 320	Industrial
ARO 210	RECTUS 25	ARO 310
Tru-Flate		


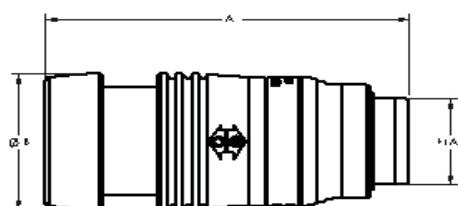


Figure 1

Flow Data

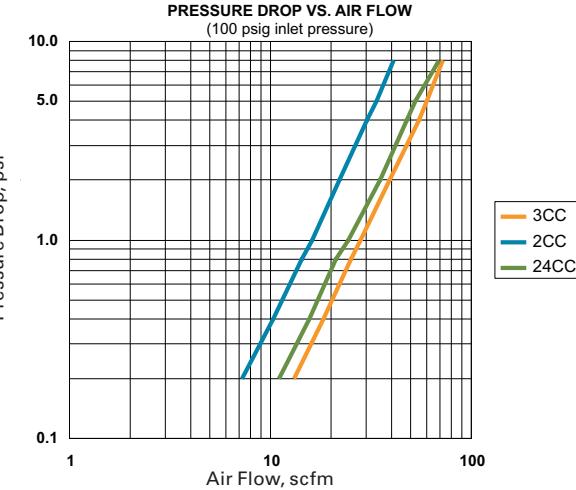

Part Number	Coupling Type	Body Size	Thread	Type	Fig.	Dimensions					
						A (in)	B (in)	Hex (in)	A (mm)	B (mm)	Hex (mm)
2CC25F	Socket/Female	1/4	1/4	Female NPTF	1	2.64	1.188	0.75	67.06	30.18	19.05
2CC37F	Socket/Female	1/4	3/8	Female NPTF	1	2.84	1.188	0.75	72.14	30.18	19.05
3CC25F	Socket/Female	3/8	1/4	Female NPTF	1	2.68	1.188	0.75	68.07	30.18	19.05
3CC37F	Socket/Female	3/8	3/8	Female NPTF	1	2.88	1.188	0.75	73.15	30.18	19.05
3CC50F	Socket/Female	3/8	1/2	Female NPTF	1	3.36	1.188	0.875	85.34	30.18	22.23
3CC25FBS	Socket/Female	1/4	1/4	Female BSPP	1	2.88	1.188	0.75	73.15	30.18	19.05
3CC37FBS	Socket/Female	3/8	3/8	Female BSPP	1	2.88	1.188	0.75	73.15	30.18	19.05
24CC25F	Socket/Female	1/4	1/4	Female NPTF	1	2.64	1.188	0.75	67.06	30.18	19.05
24CC37F	Socket/Female	1/4	3/8	Female NPTF	1	2.84	1.188	0.75	72.14	30.18	19.05
24CC25FBS	Socket/Female	1/4	1/4	Female BSPP	1	2.84	1.188	0.75	72.14	30.18	19.05

1000 Series



Eaton's 1000 Series is an Industrial Interchange pneumatic coupling that is rugged and reliable designed for use with compressed air, gases, and liquids.

Product Features

- Ball latching mechanism
- Optional sleeve lock prevents accidental disconnection
- All sizes accept US Industrial Interchange
- 1/4" accepts ISO 6150 B and A-A-59439 plugs/males
- Standard body material: Brass with nickel plated steel sleeve
- Standard seal material: Buna-N
- Optional seal materials: Silicone-138, FKM-143, EPDM-192


Physical Characteristics

Series	Body Size (in)	Max. Operating Pressure (bar)	Min. Burst Pressure (bar)	Rated Flow (lpm)	Rated Flow (gpm)
1000	1/4	138	2,000	552	8,000

Applications & Markets

- General Pneumatics
- Construction
- Industrial Plants

Flow Data

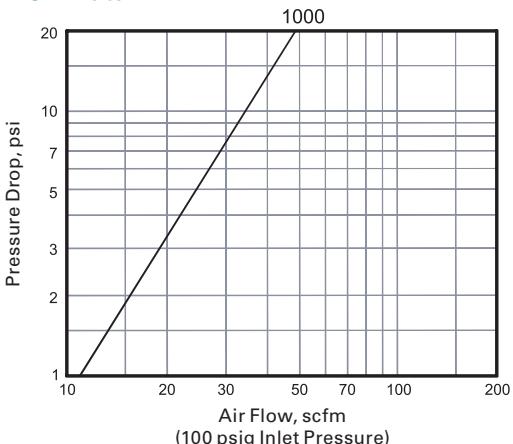

1000 Series




Figure 1




Figure 2

Male NPTF Connections

Part Number	Coupling Type	Body Size	Port Size	Thread	Type	Material	Fig.	Dimensions					
								A (in)	B (in)	Hex (in)	A (mm)	B (mm)	Hex (mm)
900	Socket/Female	1/4	1/8	1/8-27	NPTF	Brass	1	1.97	1.00	0.69	50.04	25.40	17.53
1100	Socket/Female	1/4	1/4	1/4-18	NPTF	Brass	1	2.16	1.00	0.69	54.86	25.40	17.53
1300	Socket/Female	1/4	3/8	3/8-18	NPTF	Brass	1	2.12	1.00	0.69	53.85	25.40	17.53
LL1100	Socket/Female	1/4	1/4	1/4-18	NPTF	Stainless	1	2.16	1.00	0.69	54.86	25.40	17.53
Part Number	Coupling Type	Body Size	Port Size	Thread	Type	Material	Fig.	Dimensions					
								C (in)	D (in)	Hex (in)	C (mm)	D (mm)	Hex (mm)
10	Plug/Male	1/4	1/4	1/4-18	NPTF	Steel	2	1.75	0.62	0.56	44.45	15.75	14.22
10C§	Plug/Male	1/4	1/4	1/4-18	NPTF	Steel	2	1.75	0.65	0.56	44.45	16.51	14.22
10G†	Plug/Male	1/4	1/4	1/4-18	NPTF	Steel	2	1.75	0.65	0.56	44.45	16.51	14.22
12E	Plug/Male	1/4	1/8	1/8-27	NPTF	Steel	2	1.59	0.58	0.50	40.38	14.73	12.7
12G†	Plug/Male	1/4	1/8	1/8-27	NPTF	Steel	2	2.38	0.77	0.69	60.45	19.55	17.52
14	Plug/Male	1/4	3/8	3/8-18	NPTF	Steel	2	1.75	0.79	0.69	44.45	20.06	17.52
14G†	Plug/Male	1/4	3/8	3/8-18	NPTF	Steel	2	2.53	0.77	0.69	64.26	19.55	17.52
B10	Plug/Male	1/4	1/4	1/4-18	NPTF	Brass	2	1.75	0.62	0.56	44.45	16.25	14.22
LL10	Plug/Male	1/4	1/4	1/4-18	NPTF	Stainless	2	1.75	0.62	0.56	44.45	16.51	14.22
10NK*	Plug/Male	1/4	1/4	1/4-18	NPTF	Steel	2	1.75	0.62	0.56	44.45	15.75	14.22

§ With Ball Check †With Bleeder Ball Check—Reduces Hose Whip *Nickel plated




Figure 3




Figure 4

Female NPTF Connections

Part Number	Coupling Type	Body Size	Port Size	Thread	Type	Material	Fig.	Dimensions					
								A (in)	B (in)	Hex (in)	A (mm)	B (mm)	Hex (mm)
800E	Socket/Female	1/4"	1/8	1/8-27	NPTF	Brass	3	1.86	1.00	0.69	47.24	25.40	17.53
1000E	Socket/Female	1/4"	1/4	1/4-18	NPTF	Brass	3	2.08	1.00	0.69	52.83	25.40	17.53
1200	Socket/Female	1/4"	3/8	3/8-18	NPTF	Brass	3	2.16	1.00	0.75	54.86	25.40	19.05
LL1000	Socket/Female	1/4"	1/4	1/4-18	NPTF	Stainless	3	2.08	1.00	0.69	52.83	25.40	17.53
Part Number	Coupling Type	Body Size	Port Size	Thread	Type	Material	Fig.	Dimensions					
								C (in)	D (in)	Hex (in)	C (mm)	D (mm)	Hex (mm)
11	Plug/Male	1/4"	1/4	1/4-18	NPTF	Steel	4	1.63	0.79	0.69	41.40	20.07	17.53
11G†	Plug/Male	1/4"	1/4	1/4-18	NPTF	Steel	4	2.44	0.77	0.69	61.98	19.56	17.53
13	Plug/Male	1/4"	1/8	1/8-27	NPTF	Steel	4	1.47	0.65	0.56	37.34	16.51	14.22
15E	Plug/Male	1/4"	3/8	3/8-18	NPTF	Steel	4	1.69	0.94	0.81	42.93	23.88	20.57
11B	Plug/Male	1/4"	1/4	1/4-18	NPTF	Brass	4	1.63	0.78	0.69	41.40	19.81	17.53
LL11	Plug/Male	1/4"	1/4	1/4-18	NPTF	Stainless	4	1.63	0.79	0.69	41.40	20.07	17.53
11NK*	Plug/Male	1/4	1/4	1/4-18	NPTF	Steel	4	1.63	0.79	0.69	41.40	20.07	17.53

†With Bleeder Ball Check—Reduces Hose Whip *Nickel plated

1000 Series

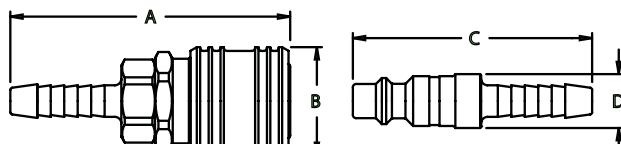



Figure 5

Figure 6


Hose Stem End Connections

Part Number	Coupling Type	Body Size	Hose I.D.	Material	Fig.	Dimensions A (in)	Dimensions B (in)	A (mm)	B (mm)
1600E	Socket/Female	1/4	1/4	Brass	5	2.60	1.00	66.04	25.40
1600P‡	Socket/Female	1/4	1/4	Brass	5, 5A	2.37	1.00	60.20	25.40
1700E	Socket/Female	1/4	3/8	Brass	5	2.60	1.00	66.04	25.40
1700P‡	Socket/Female	1/4	3/8	Brass	5, 5A	2.44	1.00	61.98	25.40
1800	Socket/Female	1/4	5/16	Brass	5	2.60	1.00	66.04	25.40
Part Number	Coupling Type	Body Size	Hose I.D.	Material	Fig.	Dimensions C (in)	Dimensions D (in)	C (mm)	D (mm)
16	Plug/Male	1/4	1/4	Steel	6	2.22	0.50	56.39	12.70
16G†	Plug/Male	1/4	1/4	Steel	6	2.97	0.77	75.44	19.56
16P‡	Plug/Male	1/4	1/4	Steel	6, 6A	2.00	0.58	50.80	14.73
17	Plug/Male	1/4	3/8	Steel	6	2.22	0.5	56.39	12.70
17G‡	Plug/Male	1/4	3/8	Steel	6	2.96	0.77	75.18	19.56
17P‡	Plug/Male	1/4	3/8	Steel	6, 6A	2.06	0.5	52.32	12.70
18E	Plug/Male	1/4	5/16	Steel	6	2.22	0.50	56.39	12.70
B17	Plug/Male	1/4	3/8	Brass	6	2.22	0.5	56.39	12.70
16NK*	Plug/Male	1/4	1/4	Steel	6	2.22	0.50	56.39	12.70
17NK*	Plug/Male	1/4	3/8	Steel	6	2.22	0.5	56.39	12.70


†With Bleeder Ball Check—Reduces Hose Whip ‡ For use with push-on style hose *Nickel plated




1600P



1700P



16P



17P

Figure 5A

Figure 6A

1000 Series

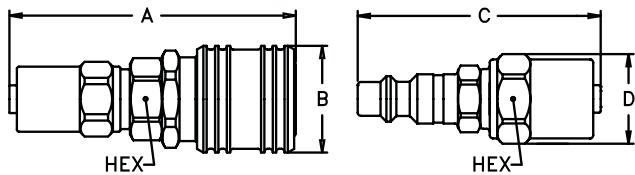


Figure 7

Figure 8

Hose Clamp End Connections

Part Number	Coupling Type	Body Size	Hose I.D.	Hose O.D.	Material	Fig.	Dimensions					
							A (in)	B (in)	Hex (in)	A (mm)	B (mm)	Hex (mm)
1SB1	Socket/Female	1/4	1/4	15/32	Brass	7	2.69	1.00	0.69	68.33	25.40	17.53
1SB3	Socket/Female	1/4	1/4	1/2	Brass	7	2.69	1.00	0.69	68.33	25.40	17.53
1SB5E	Socket/Female	1/4	1/4	9/16	Brass	7	2.69	1.00	0.69	68.33	25.40	17.53
1SB7	Socket/Female	1/4	1/4	5/8	Brass	7	2.69	1.00	0.69	68.33	25.40	17.53
1SC5	Socket/Female	1/4	5/16	9/16	Brass	7	2.75	1.00	0.69	69.85	25.40	17.53
1SC7	Socket/Female	1/4	5/16	5/8	Brass	7	2.75	1.00	0.69	69.85	25.40	17.53
1SC9	Socket/Female	1/4	5/16	11/16	Brass	7	2.75	1.00	0.69	69.85	25.40	17.53
1SD5	Socket/Female	1/4	3/8	9/16	Brass	7	2.81	1.00	0.69	71.37	25.40	17.53
1SD7	Socket/Female	1/4	3/8	5/8	Brass	7	2.81	1.00	0.69	71.37	25.40	17.53
1SD9	Socket/Female	1/4	3/8	11/16	Brass	7	2.81	1.00	0.69	71.37	25.40	17.53
1SD11	Socket/Female	1/4	3/8	3/4	Brass	7	2.81	1.00	0.69	71.37	25.40	17.53
Part Number	Coupling Type	Body Size	Hose I.D.	Hose O.D.	Material	Fig.	Dimensions					
							C (in)	D (in)	Hex (in)	C (mm)	D (mm)	Hex (mm)
3PB1	Plug/Male	1/4	1/4	15/32	Steel	8	2.31	0.70	0.63	58.67	17.78	16.00
3PB3	Plug/Male	1/4	1/4	1/2	Steel	8	2.31	0.70	0.63	58.67	17.78	16.00
3PB5	Plug/Male	1/4	1/4	9/16	Steel	8	2.31	0.77	0.69	58.67	19.56	17.53
3PB7	Plug/Male	1/4	1/4	5/8	Steel	8	2.31	0.84	0.75	58.67	21.34	19.05
3PB9	Plug/Male	1/4	1/4	11/16	Steel	8	2.31	0.94	0.81	58.67	23.88	20.57
3PB11	Plug/Male	1/4	1/4	3/4	Steel	8	2.31	0.98	0.88	58.67	24.89	22.35
3PC5	Plug/Male	1/4	5/16	9/16	Steel	8	2.38	0.77	0.69	60.45	19.56	17.53
3PC7	Plug/Male	1/4	5/16	5/8	Steel	8	2.38	0.84	0.75	60.45	21.34	19.05
3PC9	Plug/Male	1/4	5/16	11/16	Steel	8	2.38	0.91	0.81	60.45	23.11	20.57
3PD5	Plug/Male	1/4	3/8	9/16	Steel	8	2.44	0.77	0.69	61.98	19.56	17.53
3PD7	Plug/Male	1/4	3/8	5/8	Steel	8	2.44	0.84	0.75	61.98	21.34	19.05
3PD9	Plug/Male	1/4	3/8	11/16	Steel	8	2.44	0.91	0.81	61.98	23.11	20.57
3PD11	Plug/Male	1/4	3/8	3/4	Steel	8	2.44	1.01	0.88	61.98	25.65	22.35

G600 Series

ISO 6150 B Interchange



Eaton Gromelle™ G600 Series is a single shut-off compressed air coupling that interchanges with ISO 6150 B and US A-A-59439 Standards requirements. Nominal diameter is 5.5 mm. Its new revamped design and the materials used make it a rugged and long-lasting coupling, offered in a wide selection of end connections. It is used in general pneumatic applications.

Product Features

- Automatic sleeve for one-hand push-to-connect operation with ball-locking mechanism
- Single shut-off valving
- Excellent flow capacity
- Easy to connect
- Shock resistant ergonomic sleeve
- Standard body material (Socket): Nickel plated brass
- Standard body material (Plug): Zinc trivalent-plated steel
- Standard seal material: NBR

Physical Characteristics

Body Size	Nominal Flow Diameter	Max. Operating Pressure	Air Flow Rate*		Working Temperature				
			Δp 0.6 bar/8.7 psi**	Δp 1 bar/14.5 psi***	(°C)	(°F)			
1/4	5.5	20	290	1,050	277	1,315	347	-20° +100°	-4° +212°

*Indicated values refer to an inlet pressure of 6 bar / 87 psi.


**This flow rate allows the optimum output from a pneumatic tool.

*** This flow rate is the maximum recommended for a suitable output from a pneumatic tool. For applications needing higher flow rates, it is recommended to select a larger size coupling.

Applications & Markets

- Compressed Air
- Pneumatic Tools

Flow Data

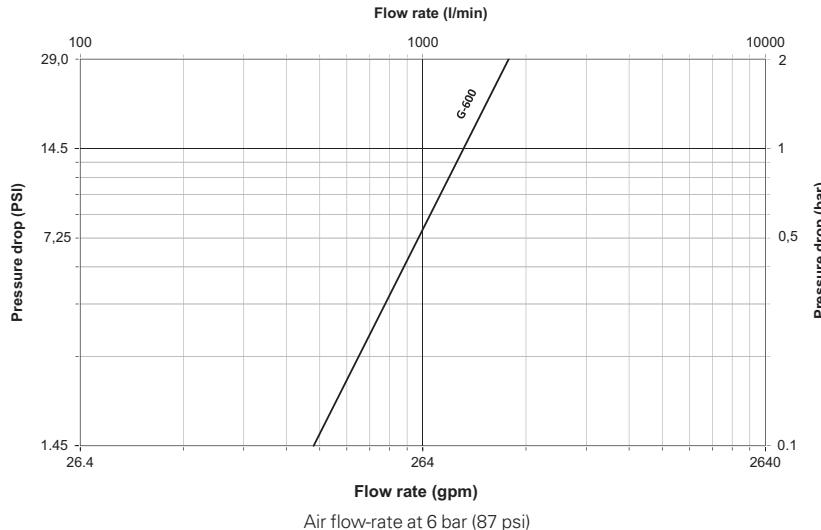

G600 Series ISO 6150 B Interchange




Figure 1




Figure 2




Figure 3




Figure 4




Figure 5

Sockets (Female)

Part Number	Body Size	Port Size	Thread or Hose Diam.* Type	Fig.	Dimensions												Weight
					A (in)	B (in)	C (in)	Hex1 (in)	Hex2 (in)	A (mm)	B (mm)	C (mm)	Hex1 (mm)	Hex2 (mm)	lbs	g	
GL0063614	1/4	1/4-19	Male BSPT	1	1.93	1.14	0.51	0.67	-	49	29	13	17	-	0.23	103	
GL0063638	3/8	3/8-19	Male BSPT	1	1.93	1.14	0.57	0.67	-	49	29	14.5	17	-	0.25	112	
GL0063612	1/2	1/2-14	Male BSPT	1	1.89	1.14	0.67	0.87	-	48	29	17	22	-	0.28	126	
GL0063645	M14	M14x1.25	Male Metric	1	1.93	1.14	0.51	0.67	-	49	29	13	17	-	0.23	105	
GL0062614	1/4	1/4-19	Female BSPP	2	2.30	1.14	-	0.67	-	58.5	29	-	17	-	0.22	102	
GL0062638	3/8	3/8-19	Female BSPP	2	2.42	1.14	-	0.87	-	61.5	29	-	22	-	0.27	121	
GL0062645	M14	M14x1.25	Female Metric	2	2.34	1.14	-	0.67	-	59.5	29	-	17	-	0.22	101	
GL0065667	-	6 mm	Hose Tail	3	1.87	1.14	1.10	0.67	-	47.5	29	28	17	-	0.22	99	
GL0065678	1/4	-	7 mm	3	1.87	1.14	1.10	0.67	-	47.5	29	28	17	-	0.22	101	
GL0065689		-	8 mm	3	1.87	1.14	1.10	0.67	-	47.5	29	28	17	-	0.22	101	
GL0065690		-	9 mm	3	1.87	1.14	1.10	0.67	-	47.5	29	28	17	-	0.22	102	
GL0065601		-	10 mm	3	1.87	1.14	1.10	0.67	-	47.5	29	28	17	-	0.22	102	
GL0061674		-	7x14 mm	4	2.95	1.14	-	0.67	0.75	75	29	-	17	19	0.30	134	
GL0061684		-	8x14 mm	4	2.95	1.14	-	0.67	0.75	75	29	-	17	19	0.29	130	
GL0061685		-	8x15 mm	4	2.95	1.14	-	0.67	0.75	75	29	-	17	19	0.28	126	
GL0061696	-	9x16mm	Reusable Hose Fit.	4	2.95	1.14	-	0.67	0.75	75	29	-	17	19	0.28	128	
GL0065014	1/4	1/4-19	Female BSPP Bulkhead**	5	1.83	1.14	0.67	1.06	1.06	46.5	29	17	27	27	0.33	148	

To obtain connected length of coupling add dimensions A or A+C (Fig. 1, 2, 3, 4, 5) and D or D+E (Fig. 6, 7, 8, 9, 10) together and subtract 20 mm (0.79 in.)

*Alternative end connections available upon request.

**Max bulkhead thickness: 10 mm (0.39 in.) / Bulkhead hole diameter: 21 mm (0.83 in.)

G600 Series ISO 6150 B Interchange




Figure 6




Figure 7



Figure 8




Figure 9




Figure 10

Plug (Male)

Part Number	Body Size	Port Size	Thread or Hose Diam.* Type	Fig.	Dimensions												
					D	E	F	Hex1	Hex2	D	E	F	Hex1	Hex2	Weight		
(in)	(in)	(in)	(in)	(in)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	lbs	g	
GA0066318	1/8	1/8-28	Male BSPT	6	1.26	0.35	-	0.47	-	32	9	-	12	-	0.04	19	
GA0066314	1/4	1/4-19	Male BSPT	6	1.26	0.51	-	0.55	-	32	13	-	14	-	0.06	25	
10	1/4	1/4-18	Male NPT	6	1.22	0.55	-	0.59	-	31	14	-	15	-	0.06	25	
GA0066338	3/8	3/8-19	Male BSPT	6	1.26	0.59	-	0.67	-	32	15	-	17	-	0.08	38	
GA0066345	M14	M14x1,25	Male Metric	6	1.26	0.51	-	0.55	-	32	13	-	14	-	0.06	26	
GA0066214	1/4	1/4-19	Female BSPP	7	1.73	-	-	0.67	-	44	-	-	17	-	0.07	30	
11	1/4	1/4-18	Female NPT	7	1.63	-	-	0.71	-	41.5	-	-	18	-	0.07	30	
GA0066238	3/8	3/8-19	Female BSPP	7	1.73	-	-	0.83	-	44	-	-	21	-	0.08	37	
GA0066245	M14	M14x1,25	Female Metric	7	1.73	-	-	0.67	-	44	-	-	17	-	0.06	25	
GA0066248	1/4	-	M14x1,25	Female Metric	7	1.73	-	-	0.55	-	44	-	-	14	-	0.05	24
GA0066767	-	6 mm	Hose Tail	8	1.10	1.02	0.55	-	-	28	26	14	-	-	0.04	19	
GA0066778	-	7 mm	Hose Tail	8	1.10	1.02	0.55	-	-	28	26	14	-	-	0.04	20	
GA0066789	-	8 mm	Hose Tail	8	1.10	1.02	0.55	-	-	28	26	14	-	-	0.04	20	
GA0066790	-	9 mm	Hose Tail	8	1.10	1.02	0.55	-	-	28	26	14	-	-	0.04	20	
GA0066701	-	10 mm	Hose Tail	8	1.10	1.02	0.55	-	-	28	26	14	-	-	0.05	22	
GA0066174	-	7x14 mm	Reusable Hose Fit.	9	2.22	-	-	0.63	0.75	56.5	-	-	16	19	0.12	56	
GA0066184	-	8x14 mm	Reusable Hose Fit.	9	2.22	-	-	0.63	0.75	56.5	-	-	16	19	0.13	57	
GA0066185	-	8x15 mm	Reusable Hose Fit.	9	2.22	-	-	0.63	0.75	56.5	-	-	16	19	0.12	53	
GA0066196	-	9x16 mm	Reusable Hose Fit.	9	2.22	-	-	0.63	0.75	56.5	-	-	16	19	0.11	51	
GA0066814	1/4	1/4-19	Female BSPP Swivel	10	1.50	-	-	0.67	-	38	-	-	17	-	0.06	26	
GA0066845	M14	M14x1,25	Female Metric Swivel	10	1.50	-	-	0.67	-	38	-	-	17	-	0.06	26	

To obtain connected length of coupling add dimensions A or A+C (Fig. 1, 2, 3, 4, 5) and D or D+E (Fig. 6, 7, 8, 9, 10) together and subtract 20 mm (0.79 in.)

*Alternative end connections available upon request.

G700 Series

European Profile



Eaton Gromelle™ G700 Series is a single shut-off compressed air coupling with a European profile. Nominal diameter is 7.2/7.4 mm. This coupling offers an excellent flow capacity and is used in compressed air applications.

Product Features

- Automatic sleeve for one-hand push-to-connect operation with ball-locking mechanism
- Single shut-off valving
- Easy to connect
- Shock resistant ergonomic sleeve
- Standard body material (Socket): Nickel plated brass
- Standard body material (Plug): Zinc trivalent-plated steel
- Standard seal material: NBR

Physical Characteristics

Body Size	Nominal Flow Diameter	Max. Operating Pressure	Air Flow Rate* Δp 0.6 bar/8.7 psi**	Δp 1 bar/14.5 psi***	Working Temperature			
(mm)	(bar)	(psi)	(lpm)	(gpm)	(lpm)	(gpm)	°C	°F
1/4	7.3	20	290	1,550	410	1,960	520	-20° +100° -4° +212°

*Indicated values refer to an inlet pressure of 6 bar / 87 psi.


**This flow rate allows the optimum output from a pneumatic tool.

***This flow rate is the maximum recommended for a suitable output from a pneumatic tool. For applications needing higher flow rates, it is recommended to select a larger size coupling.

Applications & Markets

- Compressed Air
- Pneumatic Tools

Flow Data

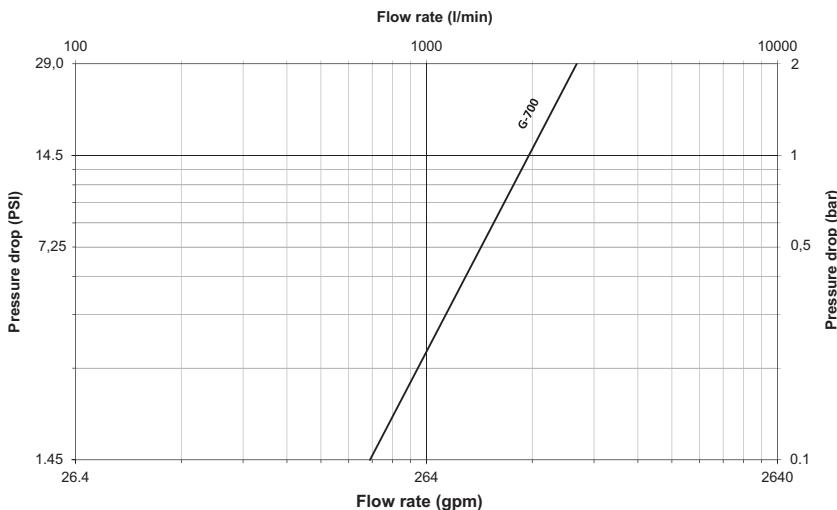

Air flow-rate at 6 bar (87 psi)

G700 Series

European Profile




Figure 1




Figure 2




Figure 3

Sockets (Female)

Part Number	Body Size	Port Size	Thread or Hose Diam.*	Type	Fig.	Dimensions								Weight	
						A (in)	B (in)	C (in)	Hex (in)	A (mm)	B (mm)	C (mm)	Hex (mm)		
GL0073614	1/4	1/4-19	Male BSPT	1	1.93	1.14	0.51	1	49	29	13	17	0.22	101	
GL0073638		3/8-19	Male BSPT	1	1.93	1.14	0.57	1	49	29	14.5	17	0.24	110	
GL0073612		1/2	1/2-14	Male BSPT	1	1.89	1.14	0.67	1	48	29	17	22	0.27	124
GL0072614		1/4	1/4-19	Female BSPP	2	2.30	1.14	-	0.7	58.5	29	-	17	0.22	102
GL0072638		3/8	3/8-19	Female BSPP	2	2.42	1.14	-	0.7	61.5	29	-	17	0.26	120
GL0072612		1/2	1/2-14	Female BSPP	2	2.58	1.14	-	0.9	65.5	29	-	22	0.22	100
GL0075667		-	6 mm	Hose Tail	3	1.87	1.14	1.10	-	47.5	29	28	-	0.22	98
GL0075689		-	8 mm	Hose Tail	3	1.87	1.14	1.10	-	47.5	29	28	-	0.22	100
GL0075601		-	10 mm	Hose Tail	3	1.87	1.14	1.10	-	47.5	29	28	-	0.22	100
GL0075613		-	13 mm	Hose Tail	3	1.87	1.14	1.30	-	47.5	29	33	-	0.22	100

*Alternative end connections available upon request.

To obtain connected length of coupling add dimensions A or A+C (Fig. 1, 2, 3) and D or D+E (Fig. 4, 5, 6) together and subtract 19 mm (0.75 in.).




Figure 4




Figure 5




Figure 6

Plugs (Male)

Part Number	Body Size	Port Size	Thread or Hose Diam.*	Type	Fig.	Dimensions								Weight	
						D (in)	E (in)	F (in)	Hex (in)	D (mm)	E (mm)	F (mm)	Hex (mm)		
GA0076314	1/4	1/4-19	Male BSPT	4	1.11	0.51	-	0.55	28.3	13	-	14	0.05	26	
GA0076338		3/8-19	Male BSPT	4	1.11	0.57	-	0.67	28.3	14.5	-	17	0.08	35	
GA0076312		1/2	1/2-14	Male BSPT	4	1.18	0.67	-	0.91	30	17	-	23	0.13	59
GA0076214		1/4	1/4-19	Female BSPP	5	1.46	-	-	0.67	37	-	-	17	0.06	26
GA0076238		3/8	3/8-19	Female BSPP	5	1.54	-	-	0.83	39	-	-	21	0.08	36
GA0076212		1/2	1/2-14	Female BSPP	5	1.77	-	-	1.02	45	-	-	26	0.14	58
GA0076767		-	6 mm	Hose Tail	6	0.80	1.02	0.47	-	20.3	26	12	-	0.03	14
GA0076789		-	8 mm	Hose Tail	6	0.80	1.02	0.47	-	20.3	26	12	-	0.03	15
GA0076701		-	10 mm	Hose Tail	6	0.94	1.02	0.67	-	24	26	17	-	0.05	23
GA0076713		-	13 mm	Hose Tail	6	0.94	1.02	0.71	-	24	26	18	-	0.06	27

*Alternative end connections available upon request.

To obtain connected length of coupling add dimensions A or A+C (Fig. 1, 2, 3) and D or D+E (Fig. 4, 5, 6) together and subtract 19 mm (0.75 in.).

I900 Series

ISO 6150 B Interchange



Eaton Gromelle™ I900 Series is a single shut-off compressed air coupling that interchanges with ISO 6150 B and US A-A-59439 Standards requirements. Nominal diameter is 8 mm.

Product Features

- Automatic sleeve for one-hand push-to-connect operation with ball-locking mechanism
- Single shut-off valving
- Excellent flow capacity
- Easy to connect
- Standard body material (Socket): Nickel plated brass
- Standard body material (Plug): Zinc trivalent plated steel
- Standard seal material: NBR

Physical Characteristics

Body Size	Nominal Flow Diameter	Max. Operating Pressure	Air Flow Rate*	Δp 0.6 bar/8.7 psi**	Δp 1 bar/14.5 psi***	Working Temperature			
(in)	(mm)	(bar)	(psi)	(lpm)	(gpm)	(lpm)	(gpm)	°C	°F
3/8	8	20	290	2,200	580	2,700	710	-20° +100°	-4° +212°

*Indicated values refer to an inlet pressure of 6 bar/87 psi.


**This flow rate allows the optimum output from a pneumatic tool.

***This flow rate is the maximum recommended for a suitable output from a pneumatic tool. For applications needing higher flow rates, it is recommended to select a larger size coupling.

Applications & Markets

- Compressed Air
- Pneumatic Tools

Flow Data

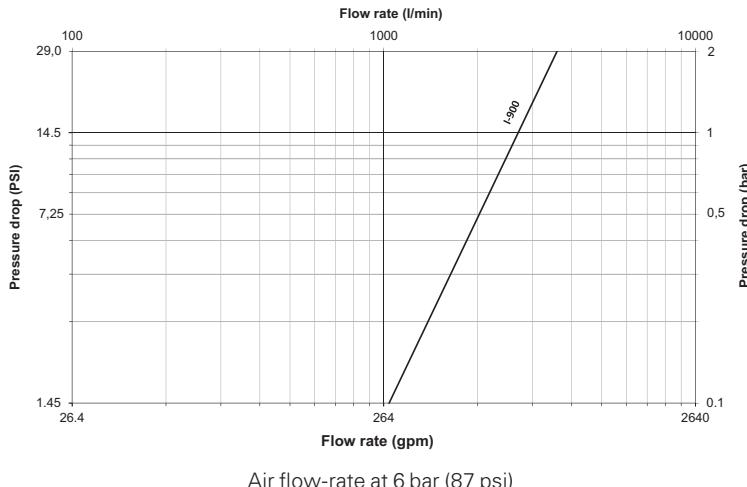

I900 Series

ISO 6150 B Interchange




Figure 1




Figure 2




Figure 3

Sockets (Female)

Part Number	Body Size	Port Size	Thread or Hose Diam.*	Type	Fig.	Dimensions								Weight
						A (in)	B (in)	C (in)	Hex1 A (mm)	B (mm)	C (mm)	Hex1 (mm)	lbs	g
IL0096014	3/8	1/4	1/4-19	Male BSPT	1	2.16	1.09	0.51	0.87	55	27.7	13	22	0.30 135
IL0096038		3/8	3/8-19	Male BSPT	1	2.16	1.09	0.59	0.87	55	27.7	15	22	0.31 139
IL0096012		1/2	1/2-14	Male BSPT	1	2.16	1.09	0.67	0.87	55	27.7	17	22	0.34 152
IL0097014		1/4	1/4-19	Female BSPP	2	2.64	1.09	-	0.87	67	27.7	-	22	0.34 153
IL0097038		3/8	3/8-19	Female BSPP	2	2.76	1.09	-	0.87	70	27.7	-	22	0.35 157
IL0097012		1/2	1/2-14	Female BSPP	2	2.87	1.09	-	1.06	73	27.7	-	27	0.41 187
IL0095689		-	8 mm	Hose Tail	3	2.20	1.09	1.10	0.87	56	27.7	28	22	0.30 135
IL0095690		-	9 mm	Hose Tail	3	2.20	1.09	1.10	0.87	56	27.7	28	22	0.30 138
IL0095601		-	10 mm	Hose Tail	3	2.20	1.09	1.10	0.87	56	27.7	28	22	0.31 139

To obtain connected length of coupling add dimensions A or A+C (Fig. 1, 2, 3) and D or D+E (Fig. 4, 5, 6) together and subtract 25.6 mm (1 in.)

*Alternative end connections available upon request.




Figure 4




Figure 5




Figure 6

Plugs (Male)

Part Number	Body Size	Port Size	Thread or Hose Diam.*	Type	Fig.	Dimensions								Weight
						D (in)	E (in)	F (in)	Hex1 D (mm)	E (mm)	F (mm)	Hex1 (mm)	lbs	g
IA0090614	3/8	1/4	1/4-19	Male BSPT	4	1.34	0.51	-	0.63	34	13	-	16	0.07 32
IA0090638		3/8	3/8-19	Male BSPT	4	1.42	0.59	-	0.67	36	15	-	17	0.09 41
IA0090612		1/2	1/2-14	Male BSPT	4	1.57	0.67	-	0.91	40	17	-	23	0.12 56
IA0090714		1/4	1/4-19	Female BSPP	5	1.97	-	-	0.67	50	-	-	17	0.08 38
IA0090738		3/8	3/8-19	Female BSPP	5	1.97	-	-	0.83	50	-	-	21	0.11 49
IA0090712		1/2	1/2-14	Female BSPP	5	2.09	-	-	1.02	53	-	-	26	0.15 69
IA0090978		-	7 mm	Hose Tail	6	1.30	1.02	0.63	-	33	26	16	-	0.07 30
IA0090989		-	8 mm	Hose Tail	6	1.30	1.02	0.63	-	33	26	16	-	0.07 30
IA0090990		-	9 mm	Hose Tail	6	1.30	1.02	0.63	-	33	26	16	-	0.07 31
IA0090901		-	10 mm	Hose Tail	6	1.30	1.02	0.63	-	33	26	16	-	0.07 32
IA0090912		-	12 mm	Hose Tail	6	1.30	1.22	0.63	-	33	31	16	-	0.08 38

To obtain connected length of coupling add dimensions A or A+C (Fig. 1, 2, 3) and D or D+E (Fig. 4, 5, 6) together and subtract 25.6 mm (1 in.)

*Alternative end connections available upon request.

I1000 Series

European Profile



Eaton Gromelle™ I1000 Series is a single shut-off compressed air coupling with a European profile. This coupling offers excellent flow capacity and is used in many compressed air applications.

Product Features

- Automatic sleeve for one-hand push-to-connect operation with ball-locking mechanism
- Single shut-off valving
- Excellent flow capacity
- Easy to connect
- Standard body material (Socket): Nickel plated brass
- Standard body material (Plug): Zinc trivalent plated steel
- Standard seal material: NBR

Physical Characteristics

Body Size	Nominal Flow Diameter	Max. Operating Pressure	Air Flow Rate*	Δp 0.6 bar/8.7 psi**	Δp 1 bar/14.5 psi***	Working Temperature			
(in)	(mm)	(bar)	(psi)	(lpm)	(gpm)	(lpm)	(gpm)	°C	°F
3/8	10.3	20	290	3,000	790	3,700	980	-20° +100°	-4° +212°

*Indicated values refer to an inlet pressure of 6 bar / 87 psi.


**This flow rate allows the optimum output from a pneumatic tool.

***This flow rate is the maximum recommended for a suitable output from a pneumatic tool. For applications needing higher flow rates, it is recommended to select a larger size coupling.

Applications & Markets

- Compressed Air
- Pneumatic Tools

Flow Data

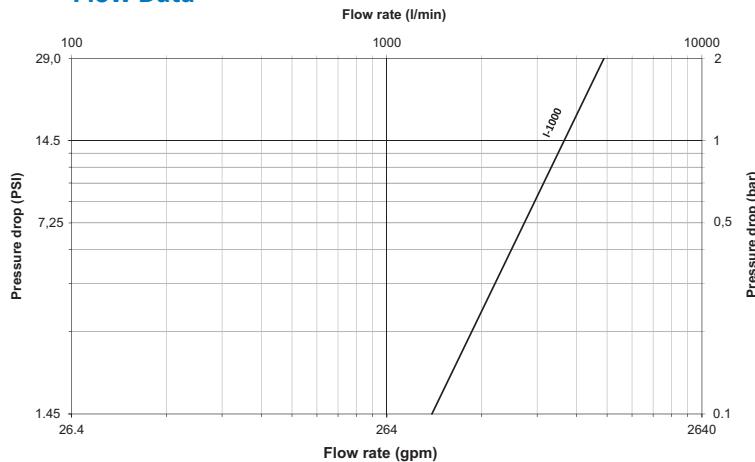

Air flow-rate at 6 bar (87 psi)

I1000 Series European Profile




Figure 1




Figure 2




Figure 3

Sockets (Female)

Part Number	Body Size	Port Size	Thread or Hose Diam.*	Type	Dimensions								Weight		
					Fig.	A	B	C	Hex1	A	B	C	Hex1		
(in)	(in)	(in)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	lbs	g
IL0106014	3/8	1/4	1/4-19	Male BSPT	1	2.16	1.09	0.51	0.87	53	27.7	13	22	0.29	130
IL0106038		3/8	3/8-19	Male BSPT	1	2.16	1.09	0.59	0.87	53	27.7	15	22	0.30	134
IL0106012		1/2	1/2-14	Male BSPT	1	2.16	1.09	0.67	0.87	53	27.7	17	22	0.32	147
IL0107014		1/4	1/4-19	Female BSPP	2	2.64	1.09	-	0.87	65	27.7	-	22	0.33	148
IL0107038		3/8	3/8-19	Female BSPP	2	2.76	1.09	-	0.87	68	27.7	-	22	0.32	145
IL0107012		1/2	1/2-14	Female BSPP	2	2.87	1.09	-	1.06	71	27.7	-	27	0.40	182
IL0105689		-	8 mm	Hose Tail	3	2.20	1.09	1.10	0.87	54	27.7	28	22	0.29	130
IL0105690		-	9 mm	Hose Tail	3	2.20	1.09	1.10	0.87	54	27.7	28	22	0.29	133
IL0105601		-	10 mm	Hose Tail	3	2.20	1.09	1.10	0.87	54	27.7	28	22	0.30	134

To obtain connected length of coupling add dimensions A or A+C (Fig. 1, 2, 3) and D or D+E (Fig. 4, 5, 6) together and subtract 19,8 mm (0,78 in.)

*Alternative end connections available upon request.




Figure 4




Figure 5




Figure 6

Plugs (Male)

Part Number	Body Size	Port Size	Thread or Hose Diam.*	Type	Fig.	Dimensions								Weight	
						D	E	F	Hex1	D	E	F	Hex1		
(in)	(in)	(in)	(in)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	lbs	g
IA0100638	3/8	3/8	3/8-19	Male BSPT	4	1.16	0.57	-	0.67	29.5	14.5	-	17	0.08	38
IA0100612		1/2	1/2-14	Male BSPT	4	1.30	0.67	-	0.87	33	17	-	22	0.12	56
IA0100738		3/8	3/8-19	Female BSPP	5	1.57	-	-	0.83	40	-	-	21	0.09	41
IA0100712		1/2	1/2-14	Female BSPP	5	1.77	-	-	1.06	45	-	-	27	0.16	74
IA0100990		-	9 mm	Hose Tail	6	0.85	1.02	0.59	-	21.5	26	15	-	0.04	20
IA0100901		-	10 mm	Hose Tail	6	0.85	1.02	0.59	-	21.5	26	15	-	0.05	21
IA0100912		-	12 mm	Hose Tail	6	0.98	1.02	0.71	-	25	26	18	-	0.06	26

To obtain connected length of coupling add dimensions A or A+C (Fig. 1, 2, 3) and D or D+E (Fig. 4, 5, 6) together and subtract 19,8 mm (0,78 in.)

*Alternative end connections available upon request.

T1100 Series

ISO 6150 B Interchange



Eaton Gromelle™ T1100 Series is a single shut-off compressed air coupling that interchanges with ISO 6150 B and US A-A-59439 Standards requirements. This coupling offers excellent flow capacity and is used in many compressed air applications.

Product Features

- Automatic sleeve for one-hand push-to-connect operation with ball-locking mechanism
- Single shut-off valving
- Excellent flow capacity
- Easy to connect
- Standard body material (Socket): Nickel plated brass
- Standard body material (Plug): Zinc trivalent plated steel
- Standard seal material: NBR

Physical Characteristics

Body Size (in)	Nominal Flow Diameter (mm)	Max. Operating Pressure (bar)	Max. Operating Pressure (psi)	Air Flow Rate* Δp 0.6 bar/8.7 psi**	Air Flow Rate* Δp 1 bar/14.5 psi***	Working Temperature °C	Working Temperature °F	
1/2	11	20	290	3,450	910	4,300	1,130	-20° +100° -4° +212°

*Indicated values refer to an inlet pressure of 6 bar/87 psi.


**This flow rate allows the optimum output from a pneumatic tool.

***This flow rate is the maximum recommended for a suitable output from a pneumatic tool. For applications needing higher flow rates, it is recommended to select a larger size coupling.

Applications & Markets

- Compressed Air
- Pneumatic Tools

Flow Data

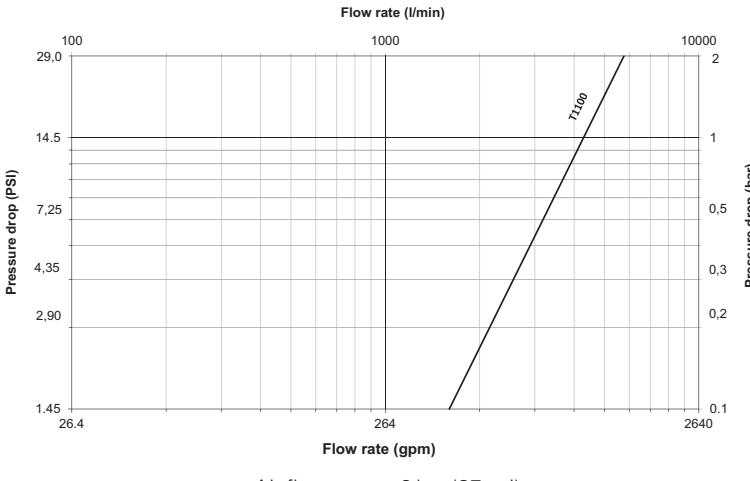

T1100 Series

ISO 6150 B Interchange




Figure 1




Figure 2




Figure 3

Sockets (Female)

Part Number	Body Size	Port Size	Thread or Hose Diam.*	Type	Dimensions								Weight	
					Fig.	A	B	C	Hex1	A	B	C	Hex1	
(in)	(in)	(in)	(in)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	lbs	g
TL0112038		3/8	3/8-19	Male BSPT	1	2.80	1.32	0.59	1.06	71	33.6	15	27	0.58 265
TL0112012		1/2	1/2-14	Male BSPT	1	2.80	1.32	0.67	1.06	71	33.6	17.0	27	0.60 270
TL0112034		3/4	3/4-14	Male BSPT	1	2.80	1.32	0.73	1.14	71	33.6	18.5	29	0.63 288
TL0112138		3/8	3/8-19	Female BSPP	2	3.29	1.32	-	1.06	83.5	33.6	-	27	0.63 286
TL0112112	1/2	1/2	1/2-14	Female BSPP	2	3.29	1.32	-	1.06	83.5	33.6	-	27	0.59 266
TL0112134		3/4	3/4-14	Female BSPP	2	3.52	1.32	-	1.26	89.5	33.6	-	32	0.69 312
TL0115601		-	10 mm	Hose Tail	3	2.85	1.32	1.10	1.06	72.5	33.6	28	27	0.58 264
TL0115613		-	13 mm	Hose Tail	3	2.85	1.32	1.30	1.06	72.5	33.6	33	27	0.60 274
TL0115616		-	16 mm	Hose Tail	3	2.85	1.32	1.30	1.06	72.5	33.6	33	27	0.62 279

To obtain connected length of coupling add dimensions A or A+C (Fig. 1, 2, 3) and D or D+E (Fig. 4, 5, 6) together and subtract 34 mm (1.34 in.)

*Alternative end connections available upon request.




Figure 4




Figure 5




Figure 6

Plugs (Male)

Part Number	Body Size	Port Size	Thread or Hose Diam.*	Type	Fig.	Dimensions								Weight	
						D	E	F	Hex1	D	E	F	Hex1		
(in)	(in)	(in)	(in)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	lbs	g
TA0111538		3/8	3/8-19	Male BSPT	4	1.71	0.57	-	0.67	43.5	14.5	-	17	0.11 51	
TA0111512		1/2	1/2-14	Male BSPT	4	1.81	0.67	-	0.87	46	17	-	22	0.15 70	
TA0111638		3/8	3/8-19	Female BSPP	5	2.09	-	-	0.83	53	-	-	21	0.12 55	
TA0111612	1/2	1/2	1/2-14	Female BSPP	5	2.28	-	-	1.06	58	-	-	27	0.19 88	
TA0111813		-	13 mm	Hose Tail	6	1.54	1.02	0.75	-	39	26	19	-	0.09 43	
TA0111816		-	16 mm	Hose Tail	6	1.54	1.02	0.87	-	39	26	22	-	0.10 47	
TA0111819		-	19 mm	Hose Tail	6	1.54	1.02	0.98	-	39	26	25	-	0.11 51	

To obtain connected length of coupling add dimensions A or A+C (Fig. 1, 2, 3) and D or D+E (Fig. 4, 5, 6) together and subtract 34 mm (1.34 in.)

*Alternative end connections available upon request.

T1300 Series

Proprietary Profile



Eaton Gromelle™ T1300 Series is a proprietary profile single shut-off compressed air coupling. This coupling offers excellent flow capacity and is used in high flow compressed air applications.

Product Features

- Automatic sleeve for one-hand push-to-connect operation with ball-locking mechanism
- Single shut-off valving
- Excellent flow capacity
- Easy to connect
- Standard body material (Socket): Nickel plated brass
- Standard body material (Plug): Zinc trivalent plated steel
- Standard seal material: NBR

Physical Characteristics

Body Size (in)	Nominal Flow Diameter (mm)	Max. Operating Pressure (bar)	Air Flow Rate* Δp 0.6 bar/8.7 psi**	Δp 1 bar/14.5 psi***	Working Temperature °C	Working Temperature °F
1/2	12	20	290	3,800 lpm / 1,000 gpm	4,600 lpm / 1,210 gpm	-20° +100° -4° +212°

*Indicated values refer to an inlet pressure of 6 bar / 87 psi.


**This flow rate allows the optimum output from a pneumatic tool.

***This flow rate is the maximum recommended for a suitable output from a pneumatic tool. For applications needing higher flow rates, it is recommended to select a larger size coupling.

Applications & Markets

- Compressed Air
- Pneumatic Tools

Flow Data

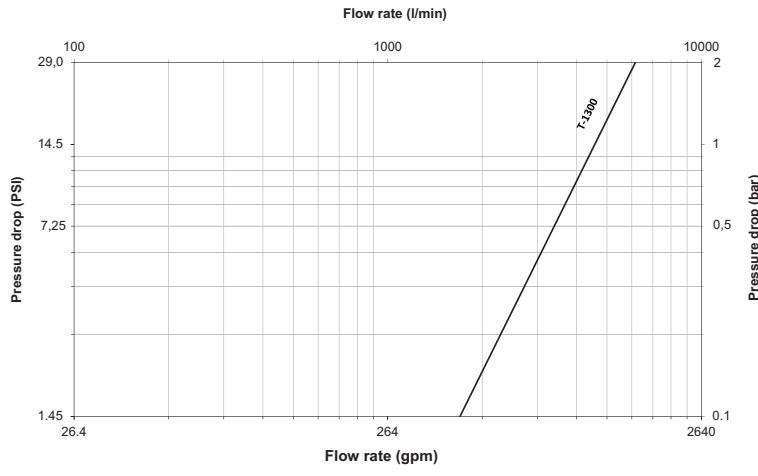

Air flow-rate at 6 bar (87 psi)

T1300 Series Proprietary Profile




Figure 1




Figure 2




Figure 3

Sockets (Female)

Part Number	Body Size	Port Size	Thread or Hose Diam.*	Type	Fig.	Dimensions							Weight	
						A (in)	B (in)	C (in)	Hex1 (in)	A (mm)	B (mm)	C (mm)	Hex1 (mm)	
TL0132038	1/2	3/8	3/8-19	Male BSPT	1	2.74	1.32	0.59	1.06	69.7	33.6	15	27	0.54 247
TL0132012		1/2	1/2-14	Male BSPT	1	2.74	1.32	0.67	1.06	69.7	33.6	17.0	27	0.56 255
TL0132034		3/4	3/4-14	Male BSPT	1	2.74	1.32	0.73	1.14	69.7	33.6	18.5	29	0.62 279
TL0132138		3/8	3/8-19	Female BSPP	2	3.24	1.32	-	1.06	82.2	33.6	-	27	0.60 272
TL0132112		1/2	1/2-14	Female BSPP	2	3.24	1.32	-	1.06	82.2	33.6	-	27	0.60 270
TL0132134		3/4	3/4-14	Female BSPP	2	3.47	1.32	-	1.26	88.2	33.6	-	32	0.65 295
TL0135601		-	10 mm	Hose Tail	3	2.80	1.32	1.10	1.06	71.2	33.6	28	27	0.55 249
TL0135613		-	13 mm	Hose Tail	3	2.80	1.32	1.30	1.06	71.2	33.6	33	27	0.57 259
TL0135616		-	16 mm	Hose Tail	3	2.80	1.32	1.30	1.06	71.2	33.6	33	27	0.58 264

To obtain connected length of coupling add dimensions A or A+C (Fig. 1, 2, 3) and D or D+E (Fig. 4, 5, 6) together and subtract 32,5 mm (1,28 in.)

*Alternative end connections available upon request.




Figure 4




Figure 5




Figure 6

Plugs (Male)

Part Number	Body Size	Port Size	Thread or Hose Diam.*	Type	Fig.	Dimensions							Weight	
						D (in)	E (in)	F (in)	Hex1 (in)	D (mm)	E (mm)	F (mm)	Hex1 (mm)	
TA0131538	1/2	3/8	3/8-19	Male BSPT	4	1.75	0.59	-	0.83	44.5	15	-	21	0.14 65
TA0131512		1/2	1/2-14	Male BSPT	4	1.83	0.67	-	0.87	46.5	17	-	22	0.19 85
TA0131638		3/8	3/8-19	Female BSPP	5	2.17	-	-	0.83	55	-	-	21	0.14 65
TA0131612		1/2	1/2-14	Female BSPP	5	2.48	-	-	1.02	63	-	-	26	0.21 95
TA0131813		-	13 mm	Hose Tail	6	1.52	1.22	0.79	-	38.5	31	20	-	0.13 57
TA0131816		-	16 mm	Hose Tail	6	1.52	1.46	0.79	-	38.5	37	20	-	0.15 70
TA0131819		-	19 mm	Hose Tail	6	1.52	1.65	1.06	-	38.5	42	27	-	0.19 87

To obtain connected length of coupling add dimensions A or A+C (Fig. 1, 2, 3) and D or D+E (Fig. 4, 5, 6) together and subtract 32,5 mm (1,28 in.)

*Alternative end connections available upon request.

Blow-Guns



Eaton offers two styles of Blow-Guns to fit your application needs.

Product Features

100 Series

- Progressive flow-control
- The airscreen version protects the operator against particle blow-back
- Body material: Nickel plated brass
- Seals: NBR

200 Series

- Pressure reduces to 2 bar(30 PSI) if the nozzle is obstructed by an obstacle
- Complies with OSHA STD 01-13-2001 standard
- When in use, the gun is designed to produce low noise levels with the comfort of the operator in mind. Complies with Directive 2003/10/EC and OSHA 1910.95(b) standard

- The <<SOFT TOUCH>> trigger and ergonomic design make it easy to grip and handle, even with work gloves. The graduated-opening system enables the operator to adjust the flow rate to his/her requirements.
- Body material: Nylon
- Nozzle: Stainless steel
- Seals: NBR

Physical Characteristics

Series	Type	Connection	Max. Operating Pressure		Temperature Range	
			(bar)	(psi)	C	F
100	Metal	G 1/4	20	290	+100C/-20C	+212F/-4F
200	Plastic	G 1/4	10	145	+70C/-20C	+158F/-4F

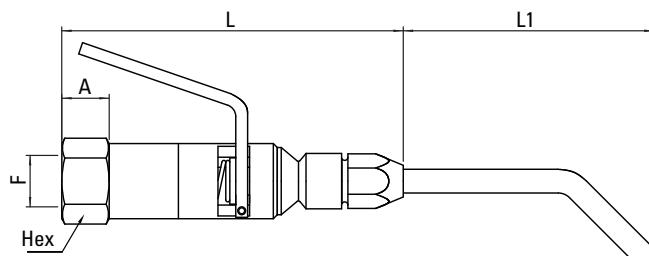


Figure 1

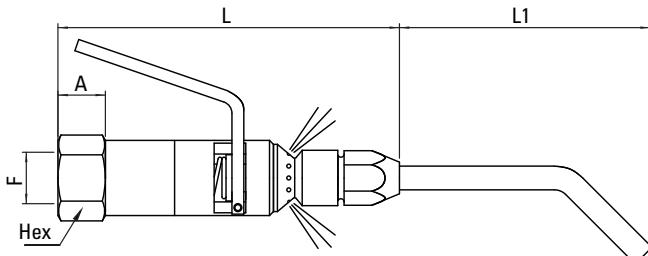


Figure 2

Series 100

Applications & Markets

- Pneumatic
- Manufacturing and Assembly

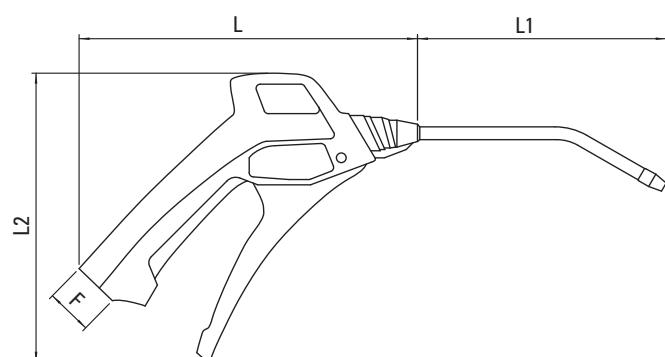


Figure 3

Series 200

Series	Part Number	Description	Fig.	F	L	L1	Hex	A	Weight	
									(mm)	(mm)
100	SA0017014	Progressive-flow blow-gun	1	G 1/4	90	65	19	12	150	
100	SA0017514	Blow-gun with airscreen	2	G 1/4	90	65	19	12	150	

Series	Part Number	Description	Fig.	F	L	L1	L2	Weight	
								(mm)	(mm)
200	SP0020014	Blow-gun with metal nozzle	3	G 1/4	153	105	130	140	

Adapters



Product Features

200 Series

- Zinc plated steel

280 Series

- Nickel plated brass

700 Series

Zinc plated steel

*EL is brass

Physical Characteristics

Series Max. Operating Pressure

Series	(bar)	(psi)
200	120-250	1740-3625
280	60	870
700	35	508

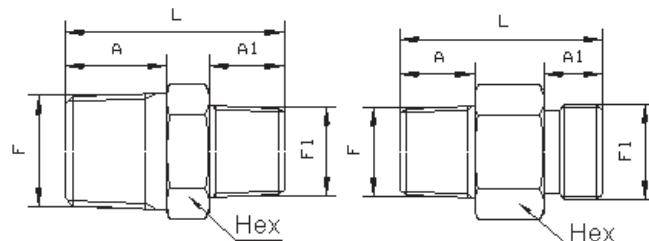


Figure 1

Figure 2

200 Series

Male BSP Taper Nipple

Connection F	Connection F1	Part Number	Fig.	Dimensions						Pressure
				L (mm)	A (mm)	Hex (mm)	A1 (mm)	Weight (g)	Pressure	
R 1/8	R 1/8	MA0024318	1	26	10	12	10	13	250	
R 1/4	R 1/8	MA0024484	1	31	14	14	10	20	250	
R 3/8	R 1/8	MA0024588	1	32	15	17	9	29	250	
R 1/4	R 1/4	MA0024314	1	35	14	14	14	25	250	
R 3/8	R 1/4	MA0024448	1	36	15	17	14	34	250	
R 1/2	R 1/4	MA0024524	1	41	19	22	14	62	250	
R 3/8	R 3/8	MA0024338	1	37	15	17	15	39	250	
R 1/2	R 3/8	MA0024482	1	42	19	22	15	67	250	
R 3/4	R 3/8	MA0024548	1	44	20	27	15	95	175	
R 1/2	R 1/2	MA0024312	1	46	19	22	19	68	250	
R 3/4	R 1/2	MA0024424	1	48	20	27	19	94	175	
R 1	R 1/2	MA0024512	1	53	24	36	19	191	150	
R 3/4	R 3/4	MA0024334	1	49	20	27	20	107	175	
R 1	R 3/4	MA0024441	1	54	24	36	20	182	150	
R 1	R 1	MA0024310	1	58	24	36	24	205	150	

Male BSP Taper/Metric Male Nipple

Connection F	Connection F1	Part Number	Fig.	Dimensions						Pressure
				L (mm)	A (mm)	Hex (mm)	A1 (mm)	Weight (g)	Pressure	
R 1/4	M 14 x 1.25	MA0024145	2	31	13	16	12	24	250	
R 3/8	M 18 x 1.25	MA0024188	2	33	14	22	11	44	250	

Adapters




Figure 3




Figure 4




Figure 5

200 Series (cont.)

Reducing Bush

Connection F	Connection F1	Part Number	Fig.	Dimensions					
				L (mm)	A (mm)	Hex (mm)	A1 (mm)	Weight (g)	Pressure (bar)
R 1/4	G 1/8	MA0025548	3	21	14	14	-	14	250
R 3/8	G 1/8	MA0025688	3	22	15	17	-	27	250
R 3/8	G 1/4	MA0025584	3	23	15	19	-	20	250
R 1/2	G 1/4	MA0025624	3	27	19	22	-	49	250
R 1/2	G 3/8	MA0025528	3	27	19	22	-	37	250
R 3/4	G 3/8	MA0025648	3	29	20	27	-	77	175
R 3/4	G 1/2	MA0025542	3	29	20	27	-	52	175
R 1	G 1/2	MA0025612	3	34	24	36	-	139	150
R 1	G 3/4	MA0025514	3	34	24	36	-	100	150

Female/Male Reducer

Connection F	Connection F1	Part Number	Fig.	Dimensions					
				L (mm)	A (mm)	Hex (mm)	A1 (mm)	Weight (g)	Pressure (bar)
G 1/4	R 1/8	MA0024248	4	31	10	19	-	40	250
G 3/8	R 1/8	MA0026888	4	32	10	22	-	49	250
G 3/8	R 1/4	MA0024284	4	35	14	22	-	46	250
G 1/2	R 1/4	MA0026824	4	41	14	27	-	84	250
G 1/2	R 3/8	MA0024228	4	40	15	27	-	80	250
G 3/4	R 3/8	MA0026848	4	44	15	36	-	172	175
G 3/4	R 1/2	MA0024242	4	47	19	32	-	125	175
G 1	R 1/2	MA0026812	4	56	19	41	-	230	150
G 1	R 3/4	MA0024214	4	55	20	41	-	240	150

Bulkhead Reducer

Connection F	Connection F1	Part Number	Fig.	Dimensions					
				L (mm)	A Max. (mm)	Hex (mm)	B (mm)	Weight (g)	Pressure (bar)
G 1/4	G 1/8	MA0027848	5	20	14	19	13.5	17	250
G 3/8	G 1/4	MA0027884	5	28	20	22	17	29	250
G 1/2	G 3/8	MA0027828	5	32	21	26	21.5	46	250
G 3/4	G 1/2	MA0027842	5	36	24	32	27	86	120

Adapters




Figure 1




Figure 2




Figure 3




Figure 4

200 Series (cont.)

Reducing Socket

Connection F	Connection F1	Part Number	Fig.	Dimensions		Hex	A1	Weight	Pressure
				L (mm)	A (mm)				
G 1/4	G 1/8	MA0026748	1	24	-	19	-	39	250
G 3/8	G 1/4	MA0026784	1	27	-	22	-	53	250
G 1/2	G 3/8	MA0026728	1	32	-	27	-	89	250
G 3/4	G 1/2	MA0026742	1	36	-	32	-	126	175
G 1	G 3/4	MA0026714	1	45	-	41	-	131	150

Equal Socket

Connection F	Connection F1	Part Number	Fig.	Dimensions		Hex	A1	Weight	Pressure
				L (mm)	A (mm)				
G 1/8	-	MA0026918	2	20	-	14	-	17	250
G 1/4	-	MA0026914	2	25	-	19	-	35	250
G 3/8	-	MA0026938	2	27	-	22	-	45	250
G 1/2	-	MA0026912	2	35	-	27	-	76	250
G 3/4	-	MA0026934	2	40	-	32	-	113	175
G 1	-	MA0026910	2	45	-	41	-	217	150

Female-Threaded Cap

Connection F	Connection F1	Part Number	Fig.	Dimensions		Hex	A1	Weight	Pressure
				L (mm)	A (mm)				
G 1/8	-	MA0024618	3	17	-	14	-	23	250
G 1/4	-	MA0024614	3	22	-	19	-	29	250
G 3/8	-	MA0024638	3	24	-	22	-	38	250
G 1/2	-	MA0024612	3	30	-	27	-	70	250
G 3/4	-	MA0024634	3	32	-	32	-	91	175
G 1	-	MA0024610	3	41	-	41	-	176	150

Male-Threaded Cap

Connection F	Connection F1	Part Number	Fig.	Dimensions		Hex	A1	Weight	Pressure
				L (mm)	A (mm)				
R 1/8	-	MA0026618	4	16	10	12	-	10	250
R 1/4	-	MA0026614	4	21	14	14	-	22	250
R 3/8	-	MA0026638	4	22	15	17	-	31	250
R 1/2	-	MA0026612	4	27	19	22	-	55	250
R 3/4	-	MA0026634	4	29	20	27	-	89	175
R 1	-	MA0026610	4	34	24	36	-	164	150

Adapters




Figure 1




Figure 2




Figure 3




Figure 4

280 Series

Female Tee

Connection F	Connection F1	Part Number	Fig.	Dimensions L (mm)	Dimensions L1 (mm)	Hex	Weight (g)
G 1/8	-	ML0028018	1	28	42	-	28
G 1/4	-	ML0028014	1	34	51	-	57
G 3/8	-	ML0028038	1	39	56	-	83
G 1/2	-	ML0028012	1	46	67	-	144
G 3/4	-	ML0028034	1	53	73	-	201
G 1	-	ML0028010	1	64	90	-	321

Female Y-piece

Connection F	Connection F1	Part Number	Fig.	Dimensions L (mm)	Dimensions L1 (mm)	Hex	Weight (g)
G 1/8	-	ML0028618	2	27	29	13	19
G 1/4	-	ML0028614	2	32	36	17	34
G 3/8	-	ML0028638	2	37	41	20	44
G 1/2	-	ML0028612	2	45	53	25	93

Female Cross

Connection F	Connection F1	Part Number	Fig.	Dimensions L (mm)	Dimensions L1 (mm)	Hex	Weight (g)
G 1/8	-	ML0028118	3	42	-	-	48
G 1/4	-	ML0028114	3	51	-	-	73
G 3/8	-	ML0028138	3	56	-	-	107
G 1/2	-	ML0028112	3	67	-	-	185

90 Degree Female Elbow

Connection F	Connection F1	Part Number	Fig.	Dimensions L (mm)	Dimensions L1 (mm)	Hex	Weight (g)
G 1/8	-	ML0028218	4	28	-	-	21
G 1/4	-	ML0028214	4	34	-	-	40
G 3/8	-	ML0028238	4	39	-	-	58
G 1/2	-	ML0028212	4	47	-	-	106
G 3/4	-	ML0028234	4	50	-	-	130
G 1	-	ML0028210	4	64	-	-	227

Adapters




Figure 5

280 Series (cont.)

90 Degree Male/Female Elbow

Connection F	Connection F1	Part Number	Fig.	Dimensions	L	L1	Hex	Weight
				(mm)	(mm)	(mm)	(g)	
G 1/8	-	ML0028418	5	26	26	-	17	
G 1/4	-	ML0028414	5	32	32	-	34	
G 3/8	-	ML0028438	5	37	37	-	50	
G 1/2	-	ML0028412	5	44	44	-	89	
G 3/4	-	ML0028434	5	50	50	-	124	
G 1	-	ML0028410	5	60	60	-	206	

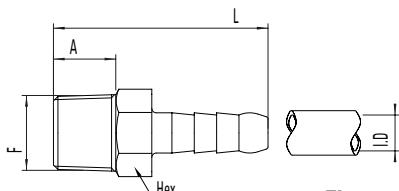


Figure 1

700 Series

Male-Threaded Hose Tail

Connection F	Hose I.D.	Part Number	Fig.	Dimensions	L	A	Hex	Weight
	(mm)			(mm)	(mm)	(mm)	(g)	
R 1/8	6	EL0070267	1	32	7.5	12	10	
R 1/8	7	EA0070278	1	41	9	14	15	
R 1/8	8	EA0070289	1	41	9	14	16	
R 1/8	9	EA0070290	1	41	9	14	18	
R 1/4	6	EA0070467	1	45	13	14	18	
R 1/4	7	EA0070478	1	45	13	14	19	
R 1/4	8	EA0070489	1	45	13	14	20	
R 1/4	9	EA0070490	1	45	13	14	20	
R 1/4	10	EA0070401	1	45	13	14	21	
R 1/4	11	EA0070411	1	50	13	14	24	
R 1/4	12	EA0070412	1	50	13	17	31	
R 1/4	13	EA0070413	1	50	13	17	36	
R 3/8	7	EA0070678	1	48	14	17	31	
R 3/8	8	EA0070689	1	48	14	17	32	
R 3/8	9	EA0070690	1	48	14	17	33	
R 3/8	10	EA0070601	1	48	14	17	33	
R 3/8	11	EA0070611	1	49	14	17	33	
R 3/8	12	EA0070612	1	53	14	17	36	
R 3/8	13	EA0070613	1	53	14	19	43	
R 3/8	16	EA0070616	1	60	14	19	50	
R 1/2	8	EA0070889	1	52	17	22	50	
R 1/2	11	EA0070811	1	57	17	22	55	
R 1/2	12	EA0070812	1	57	17	22	55	
R 1/2	13	EA0070813	1	57	17	22	58	
R 1/2	16	EA0070816	1	63	17	22	61	
R 1/2	19	EA0070819	1	69	17	22	73	
R 3/4	16	EA0071016	1	65	19	27	85	
R 3/4	19	EA0071019	1	71	19	27	100	
R 3/4	25	EA0071025	1	77	19	27	130	
R 1	19	EA0072019	1	76	22	35	165	
R 1	25	EA0072025	1	82	22	35	203	
R 1	30	EA0072030	1	94	22	35	270	

Adapters

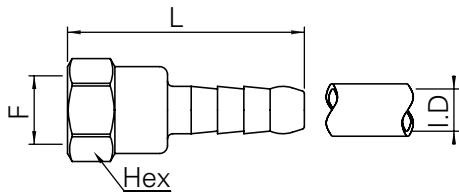


Figure 2

700 Series (cont.)

Female-Threaded Hose Tail

Connection F	Hose I.D.	Part Number	Fig.	Dimensions				Weight
				L	A	Hex		
(mm)	(mm)			(mm)	(mm)	(mm)	(g)	
G 1/4	6	EA0078167	2	45	-	17	23	
G 1/4	7	EA0078178	2	45	-	17	23	
G 1/4	8	EA0078189	2	45	-	17	25	
G 1/4	9	EA0078190	2	45	-	17	26	

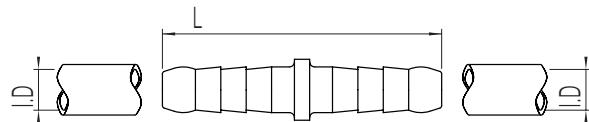


Figure 3

Hose Splicer

Connection F	Hose I.D.	Part Number	Fig.	Dimensions				Weight
				L	A	Hex		
(mm)	(mm)			(mm)	(mm)	(mm)	(g)	
-	6	EA0079767	3	55	-	-	10	
-	7	EA0079778	3	55	-	-	13	
-	8	EA0079789	3	55	-	-	14	
-	9	EA0079790	3	55	-	-	16	
-	10	EA0079701	3	55	-	-	19	
-	12	EA0079712	3	55	-	-	24	
-	16	EA0079716	3	78	-	-	50	
-	19	EA0079719	3	88	-	-	81	

Hose Reels



Eaton offers air hose reels and coil assemblies for pneumatic applications.

Product Features

SPUBD Series

- Tube material: Polyurethane
- Swivel connections: Nickel plated brass

ENR Series

- Guard material: Steel
- Polyurethane braid hose

- Plug material: Brass
- Swivel joint material: Steel

Physical Characteristics

Series	Connection	Max. Operating Pressure (bar)	Max. Operating Pressure (psi)	Temperature Range C	Temperature Range F
SPUBD	G 1/4 x G 1/4	9	130.5	+50C/-40C	+122F/-40F
ENR	R 1/4	15	220	+60C/-5C	+140F/+23F

Applications & Markets

- Pneumatic
- Manufacturing and Assembly

Series	Part Number	Connection	Hose I.D./O.D. (mm)	Max. Length (mm)	Min. Length (mm)	Coil Diameter (mm)	Color
SPUBD	SPUBD0584E	G 1/4 x G 1/4	5 x 8	4	25	60	Blue
SPUBD	SPUBD65104E	G 1/4 x G 1/4	6.5 x 10	4	32	70	Blue

Series	Part Number	End Connection	Hose I.D./O.D. (mm)	L1 (mm)	L2 (mm)	H (mm)	I1 (mm)	I2 (mm)	Hose Length (mm)	Weight (g)
ENR	ENRTPU081210E	R 1/4	8 x 12	345	380	320	121	170	10	9.5

FD17 Series



The Eaton FD17 high pressure coupling can be connected by hand while under pressure up to 4,500 psi/310 bar. This quick disconnect coupling is most commonly used in SCBA transfilling and buddy breathing applications and is commonly found on SCBA equipment certified to various NIOSH, NFPA and CBRN standards.

Product Features

- Connect and disconnect under pressure up to 4,500 psi/310 bar
- Certified on SCBA equipment that meets NIOSH, NFPA 1981 and CRN requirements
- Complies with NFPA 1981
- Standard body material: Stainless steel, aluminum

Physical Characteristics

Series	Max. Operating Pressure		Min. Burst Pressure		Rated Flow*		Rated Temperature	
	(bar)	(psi)	(bar)	(psi)	(lpm)	scfm		
FD17	310	4,500	930	13,500	125	4.4	-25°F (-32°C)/+160°F (+71°C)	




Figure 1




Figure 2

Part Number	Coupling Type	Body Size	Port Size	Thread	Type	Fig.	Dimensions		
							A (in)	B (in)	Hex (in)
FD17-1003-04-04	Socket/Female	1/4	-4	7/16-20	ORB	1	2.85	1.38	0.75
FD17-1002-10-04	Plug/Male	1/4	-10	7/8-14	ORB	2	1.93	1.43	1



Male Dust Cap

Part Number

FD17-1064-04



Female Dust Cap

Part Number

FD17-1062-04

FD69 Series

10,000 psi Water Blast



Eaton's FD69 Series design has a greater surface contact area for long service life in rugged high pressure and water blast applications. The maximum operating pressure is 10,000 psi with 40,000 psi minimum burst pressure.

Product Features

- Safety sleeve lock guards against accidental disconnection
- Smooth bore "straight through" design for high flow fluid requirements
- Heavy duty back-up ring
- to prevent O-Ring extrusion
- Available in plated steel and stainless steel for added corrosion resistance
- Standard seal material:

- Buna-N
- Standard body material: High resistance carbon steel with zinc trivalent plating or stainless steel

Applications & Markets


Physical Characteristics

Coupling Size	Max. Operating Pressure		Min. Burst Pressure Connected		Vacuum Connected Only	Rated Flow		Air Inclusion	Fluid Loss
(in)	(bar)	(psi)	(bar)	(psi)	(in./Hg)	(lpm)	(gpm)	cc. max.	cc.max.
1/2	689	10,000	2,758	40,000	28	170	45	-	-

- High pressure water blast
- Bridge/concrete repair
- Paint stripping
- Shipyards

Flow Data

Pressure Drop Versus Flow Graph

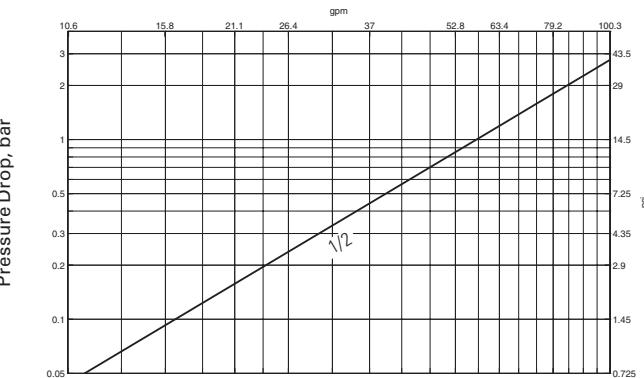

Gallons Per Minute Flow
Test Fluid: Water at 70°F

FD69 Series

10,000 psi Water Blast




Figure 1




Figure 2

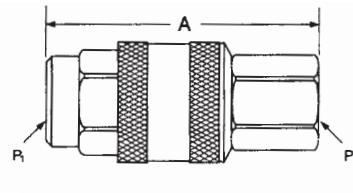


Figure 3

Dimensions (Female NPT)

Part Number Buna-N	FKM	EPDM	Coupling Type	Body Size	Port Size	Thread	Type	Fig.	Dimensions	Hex ①
						(P)	(P1)	A	B	Hex ①
				mm	mm	(in)	(in)	mm	mm	(in)
Steel										
FD69-1002-06-08	FD69-1002-06-08	FD69-1002-06-08	Plug/Male*	1/2	3/8	3/8-18	Female NPT	1	47.0 (1.85)	41.7 (1.64)
FD69-1001-06-08	FD69-1026-06-08	FD69-1028-06-08	Socket/Female	1/2	3/8	3/8-18	Female NPT	2	54.1 (2.13)	41.1 (1.62)
FD69-1002-08-08	FD69-1002-08-08	FD69-1002-08-08	Plug/Male*	1/2	1/2	1/2-14	Female NPT	1	59.4 (2.34)	41.7 (1.64)
FD69-1001-08-08	FD69-1026-08-08	FD69-1028-08-08	Socket/Female	1/2	1/2	1/2-14	Female NPT	2	54.1 (2.13)	41.1 (1.62)
Stainless Steel										
FD69-1012-08-08	FD69-1012-08-08	FD69-1012-08-08	Plug/Male*	1/2	1/2	1/2-14	Female NPT	1	59.4 (2.34)	41.7 (1.64)
FD69-1011-08-08	-	-	Socket/Female	1/2	1/2	1/2-14	Female NPT	2	54.1 (2.13)	41.1 (1.62)

*Male halves contain no seals.

Part Number Buna-N	FKM	EPDM	Coupling Type	Body Size	Port Size	Thread (P)	(P1)	Type	Fig.	Dimensions A
				mm	mm	(in)	(in)	mm	mm	(in)
Steel										
FD69-1000-080808	FD69-1027-080808	FD69-1029-080808	Complete	1/2	1/2	1/2-14	1/2-14	Female NPT	3	87.1 (3.43)
FD69-1000-080806	FD69-1027-080806	FD69-1029-080806	Complete	1/2	1/2 & 3/8	1/2-14	3/8-18	Female NPT	3	87.1 (3.43)
FD69-1000-060808	FD69-1027-060808	FD69-1029-060808	Complete	1/2	3/8 & 1/2	3/8-18	1/2-14	Female NPT	3	74.7 (2.94)
FD69-1000-060806	FD69-1027-060806	FD69-1029-060806	Complete	1/2	3/8	3/8-18	3/8-18	Female NPT	3	74.7 (2.94)
Stainless Steel										
FD69-1010-080808	-	-	Complete	1/2	1/2	1/2-14	1/2-14	Female NPT	3	87.1 (3.43)

Repair Kit, Female Interface Seal

Part Number Buna-N	Coupling Size
FF10166	1/2

FD83 Series

Full Flow Dual Interlock



Eaton's FD83 is designed for fluid transfer and electronics cooling applications where full flow, fluid compatibility and safety are essential. The FD83 identical halves include two interlock features to eliminate spills and ensure maximum safety. Valves cannot be opened until the coupling halves are mated and coupling halves cannot be disconnected until both halves are closed. The FD83 coupling system can be used in a wide variety of low pressure industrial applications.

Product Features

- Dual interlock safety feature eliminates accidental opening of coupling when disconnected with the use of a patented locking pin design and lever handle
- Design provides reliable performance and minimal spillage during maintenance or service
- Standard seal material: EPDM, additional material available on request
- Standard body material: 303 stainless steel, additional material available on request
- Full-flow capability
- Available color coded bumper seals available
- Identical coupling halves
- Maintenance and service friendly
- 303 stainless steel material provides broad fluid compatibility
- 3/4" and 1" Female NPT port threads or hose barb

Physical Characteristics

Coupling Size	Max. Operating Pressure				Min. Burst Pressure				Rated Flow	Fluid Loss	
	Connected	Socket/Female Half	Connected	Socket/Female Half	Connected	Socket/Female Half	Socket/Female Half	Rated Flow			
(in)	(bar)	(psi)	(bar)	(psi)	(bar)	(psi)	(bar)	(psi)	(lpm)	(gpm)	cc. max
1	10	150	10	150	10	150	20	300	20	300	20
									189	50	5.0

Dimensions

Part Number	Body Size	Port Size	Thread	Type	Fig.	Dimensions			Hex	①	
						A	B	①			
FD83-2052-16-16	1	1	1-11-1/2	Female NPT	1	95.5	(3.76)	71.6	(2.82)	41	(1.63)
FD83-2052-12-16	1	3/4	3/4-14	Female NPT	1	70.1	(2.76)	71.6	(2.83)	41	(1.63)
FD83-2046-16-16	1	1	NA	1" Hose Barb	2	84.2	(3.31)	71.6	(2.82)	-	-

Hose barb adapters available upon request.




Figure 1





Figure 2

Applications & Markets

- Electronics liquid based cooling
- Thermal management systems
- Industrial fluid transfer

Flow Data

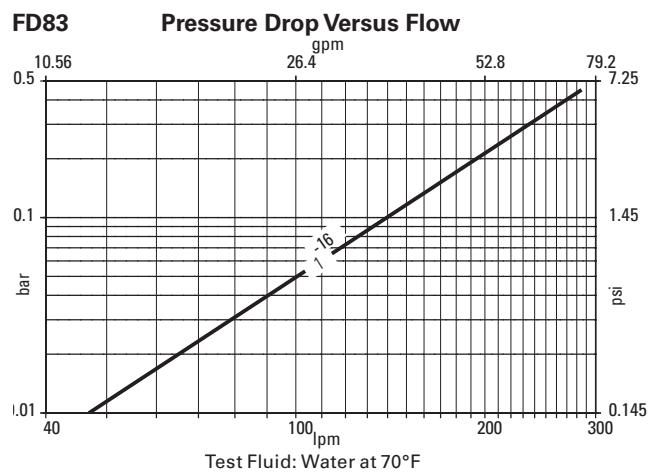

2HKIG/2HKIL Series



Eaton's 2HKIG/2HKIL Series stainless steel couplings can be used with various liquids and gases. They are functionally identical, but do not interchange. They can be used where it is necessary to avoid crossing lines.

Product Features

- Ball Lock
- Proprietary interchange with all stainless steel construction
- Female/Socket halves available with 90° connections
- Standard body material: Stainless steel
- Standard seal material: Buna-N


Physical Characteristics

Body Size (in)	Max. Operating Pressure Connected (bar)	Max. Operating Pressure Connected (psi)	Min. Burst Pressure (bar)	Min. Burst Pressure (psi)	Rated Flow (lpm)	Rated Flow (gpm)	All Inclusion cc. max.	Fluid Loss cc. max.
1/4	103	1,500	412	6,000	8.3	2.2	2.2	1

Applications & Markets

- Chemical
- Food and Beverage
- Military
- Aerospace

Flow Data

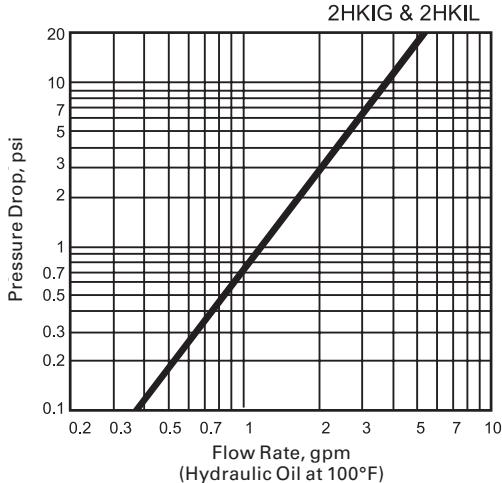

2HKIG Series




Figure 1




Figure 2




Figure 3

Male End Connections

Part Number	Coupling Type	Body Size	Thread	Fig.	Dimensions	A (in)	B (in)	Hex (in)	A (mm)	B (mm)	Hex (mm)
2HIG10	Socket/Female	1/4	1/8-27 NPTF	1		2.18	1.06	0.81	55.4	26.9	20.6
2HIG15	Socket/Female	1/4	1/4-18 NPTF	1		2.31	1.06	0.81	58.7	26.9	20.6
2HIG20	Socket/Female	1/4	3/8-18 NPTF	1		2.31	1.06	0.81	58.7	26.9	20.6
2HIG720	Socket/Female	1/4	7/16-20 NPTF	1		2.27	1.06	0.81	57.7	26.9	20.6
2HIGLLRA720	Socket/Female	1/4	7/16-20 NPTF	3		2.09	1.06	—	53.1	26.9	—
Part Number	Coupling Type	Body Size	Thread	Fig.	Dimensions	C (in)	D (in)	Hex (in)	C (mm)	D (mm)	Hex (mm)
2KIGF15	Plug/Male	1/4	1/4-18 NPTF	2		1.98	1.01	0.69	50.3	25.7	17.5
2KIGF20	Plug/Male	1/4	3/8-18 NPTF	2		1.98	1.01	0.69	50.3	25.7	17.5




Figure 1




Figure 2

Female End Connections

Part Number	Coupling Type	Body Size	Thread	Fig.	Dimensions	A (in)	B (in)	Hex (in)	A (mm)	B (mm)	Hex (mm)
2HIG11	Socket/Female	1/4	1/8-27 NPTF	1		2.18	1.06	0.81	55.4	26.9	20.6
2HIG16	Socket/Female	1/4	1/4-18 NPTF	1		2.26	1.06	0.81	57.4	26.9	20.6
Part Number	Coupling Type	Body Size	Thread	Fig.	Dimensions	C (in)	D (in)	Hex (in)	C (mm)	D (mm)	Hex (mm)
2KIGF16	Plug/Male	1/4	1/4-18 NPTF	2		1.84	1.01	0.69	46.7	25.7	17.5
2KIGF720	Plug/Male	1/4	7/16-20	2		1.61	1.01	0.69	40.9	25.7	17.5
2KIGF	Plug/Male	1/4	9/16-18	2		1.17	1.01	0.68	29.7	25.7	17.3

2HKIL Series




Figure 1




Figure 2




Figure 3

Male End Connections

Part Number	Coupling Type	Body Size	Thread	Fig.	Dimensions	A (in)	B (in)	Hex (in)	A (mm)	B (mm)	Hex (mm)
2HIL10	Socket/Female	1/4	1/8-27 NPTF	1	2.18	1.06	0.81	55.4	26.9	20.6	
2HIL15	Socket/Female	1/4	1/4-18 NPTF	1	2.31	1.06	0.81	58.7	26.9	20.6	
2HIL20	Socket/Female	1/4	3/8-18 NPTF	1	2.31	1.06	0.81	58.7	26.9	20.6	
2HIL720	Socket/Female	1/4	7/16-20 NPTF	1	2.27	1.06	0.81	57.7	26.9	20.6	
2HILLRA720	Socket/Female	1/4	7/16-20 NPTF	3	2.09	1.06	—	53.1	26.9	—	

Part Number	Coupling Type	Body Size	Thread	Fig.	Dimensions	C (in)	D (in)	Hex (in)	C (mm)	D (mm)	Hex (mm)
2KILF15	Plug/Male	1/4	1/4-18 NPTF	2	1.98	1.01	0.69	50.3	25.7	17.5	
2KILF20	Plug/Male	1/4	3/8-18 NPTF	2	1.98	1.01	0.69	50.3	25.7	17.5	




Figure 1




Figure 2

Female End Connections

Part Number	Coupling Type	Body Size	Thread	Fig.	Dimensions	A (in)	B (in)	Hex (in)	A (mm)	B (mm)	Hex (mm)
2HIL11	Socket/Female	1/4	1/8-27 NPTF	1	2.18	1.06	0.81	55.4	26.9	20.6	
2HIL16	Socket/Female	1/4	1/4-18 NPTF	1	2.26	1.06	0.81	57.4	26.9	20.6	
Part Number	Coupling Type	Body Size	Thread	Fig.	Dimensions	C (in)	D (in)	Hex (in)	C (mm)	D (mm)	Hex (mm)
2KILF16	Plug/Male	1/4	1/4-18 NPTF	2	1.84	1.01	0.69	46.7	25.7	17.5	
2KILF720	Plug/Male	1/4	7/16-20	2	1.61	1.01	0.69	40.9	25.7	17.5	
2KILF	Plug/Male	1/4	9/16-18	2	1.17	1.01	0.68	29.7	25.7	17.3	

J50000 Series



Eaton's J50000 Series is commonly seen in injection molding applications on cooling and heating lines. Stainless steel and vibration resistant structure allows for use in demanding cooling and heating environments.

Product Features

- Offers double sealing when connected
- Vibration resistant
- Flat face valves with ball locking
- Standard body material: Stainless steel
- Standard seal material: FKM

Physical Characteristics

DN/ND (mm)	Max. Operating Pressure (bar)	Max. Operating Pressure (psi)	Rated Flow (lpm)	Rated Flow (gpm)	Fluid Loss ml max.
6	50	725	18	4.76	0.01
9	50	725	43	11.36	0.02

Applications & Markets

- Injection Molding
- Electronic Cooling
- Heat-transfer Fluid

Temperature

- 15 C + 150 C / +5 F +302 F
-15 C + 200 C / +5 F +392 F

Flow Data


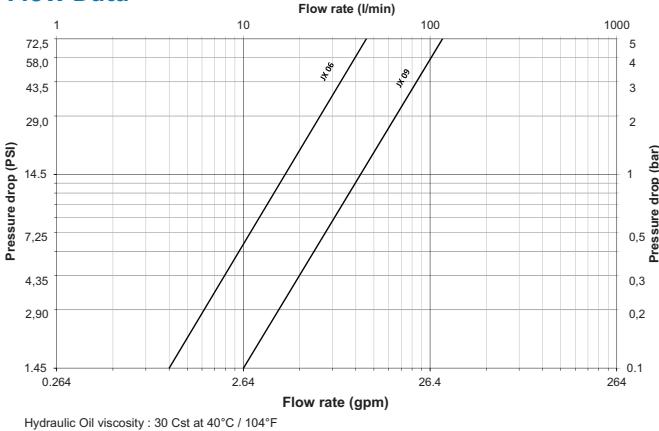


Figure 1




Figure 2

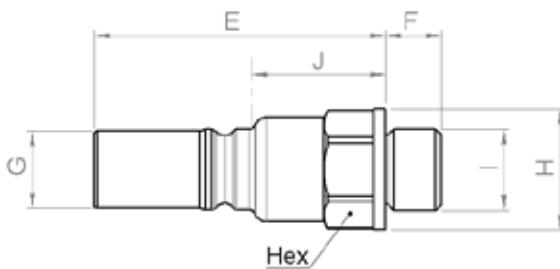


Figure 3

DN/ND (mm)	Socket/Female Part Number	Coupling Type	Connection (F)	Fig.	Dimensions			
					L (mm)	L1 (mm)	ø1 (mm)	Hex (mm)
6	JX5062614	Female Thread	G 1/4	1	60	-	22	20
9	JX5092638	Female Thread	G 3/8	1	74.5	-	28	24
6	JX5068214	90° Female Thread	G 1/4	2	57.5	35	22	22

DN/ND (mm)	Plug/Male Part Number	Coupling Type	Connection (F)	Fig.	Dimensions				
					L (mm)	A (mm)	ø1 (mm)	ø2 (mm)	Hex (mm)
6	JX5067215	Male Thread	G 1/4	3	44	9	19.5	12.5	17
9	JX5097239	Male Thread	G 3/8	3	56	10	27	17	24

J70000 Series



Eaton's J70000 Series is commonly seen in injection molding applications on cooling and heating lines. Brass and vibration resistant structure allows for use in demanding cooling and heating environments.

Product Features

- Standard body material: Brass
- Standard seal material: Viton

Physical Characteristics

DN/ND	Max. Operating Pressure (bar)	Max. Operating Pressure (psi)	Temperature
8	15	217	-15 °C + 200 °C / +5 °F +392 °F
12	15	217	-15 °C + 110 °C / +5 °F +230 °F with identification ring

Applications & Markets

- Injection Molding
- Cooling water
- Heat-transfer fluid

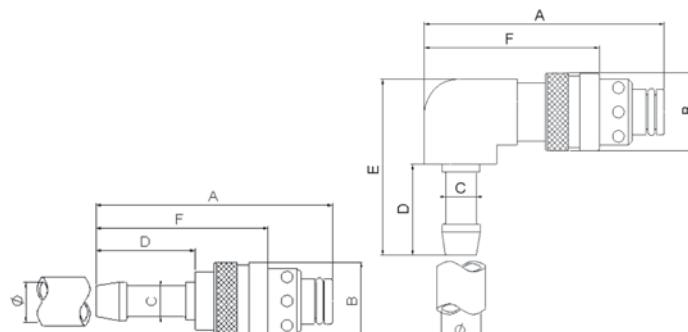


Figure 1

Figure 2

DN/ND	Socket/ Female Part Number	Coupling Type	Hose Size ø	Fig.	Dimensions												Weight					
					A	B	C	D	F	A	B	C	D	E	F	(in)	(in)	(in)	(in)	(in)	(mm)	(mm)
8	JL7086789	Plug with straight hose tail	8 mm	1	2.38	0.79	0.31	1.08	1.77	60.5	20	8	27.5	45		0.104	47					
8	JL7086701	Plug with straight hose tail	10 mm	1	2.38	0.79	0.39	1.08	1.77	60.5	20	10	27.5	45		0.110	50					
8	JL7086712	Plug with straight hose tail	12 mm	1	2.60	0.79	0.47	1.30	1.99	66	20	12	33	50.5		0.119	54					
12	JL7126713	Plug with straight hose tail	13 mm	1	2.95	1.10	0.51	1.30	2.17	75	28	13	33	55		0.271	123					
12	JL7126716	Plug with straight hose tail	16 mm	1	2.95	1.10	0.63	1.30	2.17	75	28	16	33	55		0.291	132					

DN/ND	Plug/Male Part Number	Coupling Type	Hose Size ø	Fig.	Dimensions												Weight						
					A	B	C	D	E	F	A	B	C	D	E	F	(in)	(in)	(in)	(in)	(in)	(mm)	(mm)
8	JL7088289	Plug with 90° hose tail	8 mm	2	2.17	0.79	0.31	1.08	1.93	1.56	55	20	8	27.5	49		0.179	81					
8	JL7088201	Plug with 90° hose tail	10 mm	2	2.17	0.79	0.39	1.08	1.93	1.56	55	20	10	27.5	49		0.181	82					
8	JL7088212	Plug with 90° hose tail	12 mm	2	2.17	0.79	0.47	1.30	2.17	1.56	55	20	12	33	55		0.190	86					

J70000 Series

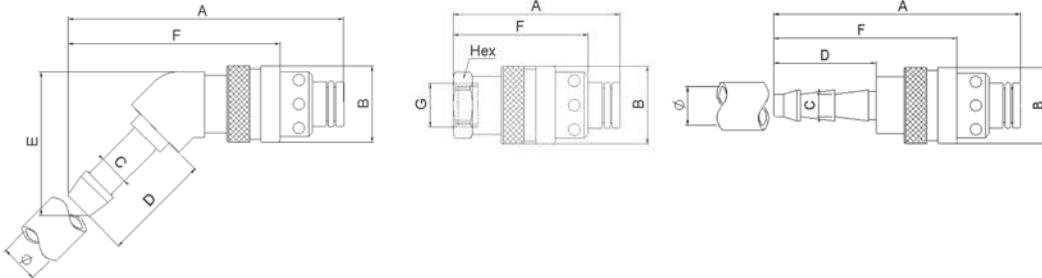


Figure 3

Figure 4

Figure 5

DN/ND	Plug/Male Part Number	Coupling Type	Hose Size ø	Dimensions												Weight	
				Fig.	A	B	C	D	E	F	A	B	C	D	E	F	
			(in)	(in)	(in)	(in)	(in)	(mm)	(lbs)	(g)							
8	JL7088389	Plug with 135° hose tail	8 mm	3	2.78	0.79	0.31	1.08	1.44	2.17	70.5	20	8	27.5	36.5	55	0.152 69
8	JL7088301	Plug with 135° hose tail	10 mm	3	2.80	0.79	0.39	1.08	1.46	2.19	71	20	10	27.5	37	55.5	0.154 70
12	JL7088312	Plug with 135° hose tail	12 mm	3	2.97	0.79	0.47	1.30	1.63	2.36	75.5	20	12	33	41.5	60	0.165 75

DN/ND	Plug/Male Part Number	Coupling Type	Thread Female G	Dimensions												Weight	
				Fig.	A	B	F	Hex	A	B	F	Hex					
			(in)	(in)	(in)	(in)	(in)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(lbs)	(g)
8	JL7086214	Plug with female thread	G 1/4	4	1.77	0.79	1.18	0.67	45	20	30	17	0.119 54				
12	JL7126212	Plug with female thread	G 1/2	4	2.28	1.10	1.52	0.94	58	28	38.5	24	0.300 136				

DN/ND	Plug/Male Part Number	Coupling Type	Hose Size ø	Dimensions												Weight	
				Fig.	A	B	C	D	F	A	B	C	D	F			
			(in)	(in)	(in)	(in)	(in)	(mm)	(lbs)	(g)							
8	JL7086388	Plug with straight push-on type hose tail	9.5 mm (3/8)	5	2.28	0.79	0.26	0.94	1.89	58	20	6.5	24	48	0.110 50		
8	JL7086812	Plug with straight push-on type hose tail	12.7 mm (1/2)	5	2.52	0.79	0.50	1.10	2.15	64	20	12.7	28	54.5	0.119 54		




Figure 6




Figure 7




Figure 8

DN/ND	Plug/Male Part Number	Coupling Type	Thread Size (Male)	Dimensions												Weight	
				Fig.	A	B	C	D	Hex	A	B	C	D	Hex			
			(in)	(in)	(in)	(in)	(in)	(mm)	(lbs)	(g)							
8	JL7083618	Socket with male thread	R 1/8	6	1.10	0.83	0.38	0.30	0.20	28	21	9.6	7.5	5	0.046 21		
8	JL7083614	Socket with male thread	R 1/4	6	1.22	0.83	0.51	0.43	0.31	31	21	13	11	8	0.053 24		
8	JL7083638	Socket with male thread	R 3/8	6	1.22	0.83	0.65	0.45	0.39	31	21	16.5	11.5	10	0.066 30		
12	JL7123638	Socket with male thread	R 3/8	6	1.56	1.26	0.65	0.45	0.39	39.5	32	16.5	11.5	10	0.141 64		
12	JL7123612	Socket with male thread	R 1/2	6	1.61	1.26	0.82	0.55	0.47	41	32	20.8	14	12	0.165 75		

DN/ND	Plug/Male Part Number	Coupling Type	Thread Size (Male)	Dimensions												Weight	
				Fig.	A	B	C	D	E	A	B	C	D	E			
			(in)	(in)	(in)	(in)	(in)	(mm)	(lbs)	(g)							
8	JL7083118	Extended socket with male thread	G 1/8	7	1.97	0.83	0.38	1.06	0.83	50	21	9.6	27	21	0.068 31		
8	JL7083218	Extended socket with male thread	G 1/8	7	3.94	0.83	0.38	2.36	0.83	100	21	9.6	60	21	0.117 53		
8	JL7083318	Extended socket with male thread	G 1/8	7	5.91	0.83	0.38	2.36	0.83	150	21	9.6	60	21	0.168 76		
8	JL7083114	Extended socket with male thread	G 1/4	7	1.97	0.83	0.51	1.06	0.79	50	21	13	27	20	0.084 38		
8	JL7083214	Extended socket with male thread	G 1/4	7	3.94	0.83	0.51	2.36	0.79	100	21	13	60	20	0.161 73		
8	JL7083314	Extended socket with male thread	G 1/4	7	5.91	0.83	0.51	2.36	0.79	150	21	13	60	20	0.240 109		
8	JL7083414	Extended socket with male thread	G 1/4	7	7.87	0.83	0.51	2.36	0.79	200	21	13	60	20	0.317 144		

To obtain connected length of coupling add Dimensions F (Fig. 1, 2, 3, 4 or 5) and A (Fig. 6 or Fig. 7) together.

DN/ND	Plug/Male Part Number	Coupling Type	Color	Dimensions												Weight
				Fig.	A	B	C	A	B	C	A	B	C	A	B	
				(in)	(in)	(in)	(in)	(mm)	(mm)	(mm)						
8	J62P082	Identification ring	Red	8	0.18	0.87	0.96	4.5	22	24.5						
8	J62P083	Identification ring	Blue	8	0.18	0.87	0.96	4.5	22	24.5						
12	J62P122	Identification ring	Red	8	0.18	1.30	1.42	4.5	33	36						
12	J62P123	Identification ring	Blue	8	0.18	1.30	1.42	4.5	33	36						

ST Series



Product Features

- Ball latching mechanism
- Smooth bore permits free flow of liquid or gas
- Available in NPTF, BSPP and Hose stem end connections
- Standard seal material: Buna-N
- Standard body material: Brass, 303 stainless steel, steel

Eaton's ST Series is a straight through coupling that is designed for use where minimum pressure drop is required and valving is not needed. These couplings are suited for various and versatile fluid transfer type systems.

European Pressure Equipment Directive

Couplings with nominal diameters up to and including 25 mm are designed and manufactured under Article 3.3 of the European Pressure Equipment Directive 97/23 EC. Couplings with nominal diameters greater than 25 mm are designed and manufactured in accordance with the stipulations of Module A of the European Pressure Equipment Directive 97/23 EC. They should not be used to convey unstable gases.

Physical Characteristics

Series	Body Size	Max. Operating Pressure Brass Socket & Plug**		Max. Operating Pressure Brass Socket & Steel Plug**		Max. All material Pressure Stainless Socket & Plug**		Max. Operating pressure all material for Hazardous liquids and gases Group 1		Min. Burst Pressure*	(bar)	(psi)	(lpm)	(gpm)
		(in)	(bar)	(psi)	(bar)	(psi)	(bar)	(psi)	(bar)					
1ST	1/8	193	2,800	234	3,400	290	4,200	***	***	772	11,200	10	2.7	
2ST	1/4	359	5,200	379	5,500	517	7,500	***	***	1,436	20,800	21	5.6	
3ST	3/8	193	2,800	290	4,200	434	6,300	***	***	772	11,200	57	15	
4ST	1/2	152	2,200	241	3,500	248	3,600	***	***	608	8,800	83	22	
6ST	3/4	117	1,700	145	2,100	207	3,000	***	***	468	6,800	250	66	
8ST	1	90	1,300	138	2,000	138	2,000	***	***	360	5,200	530	140	
10ST	1 1/4	117	1,700	186	2,700	152	2,200	***	***	468	6,800	697	184	
12ST	1 1/2	97	1,400	152	2,200	172	2,500	33	480	388	5,600	1,124	297	
16ST	2	97	1,400	152	2,200	103	1,500	27	390	388	5,600	1,855	490	
20ST	2 1/2	62	900	103	1,500	—	—	20	290	248	3,600	3,131	827	

* For Brass socket and plug. Other materials have 4 to 1 safety factor



** Operating pressure for Non Hazardous liquids and gases from Group 2

*** Operating pressure is same as Non Hazardous liquids and gases from Group 2 for this size

Applications & Markets

- Fluid Transfer
- Chemical
- Food and Beverage
- Injection Molding
- Marine
- Medical
- Pressure Washing
- Steam Cleaning

Flow Data

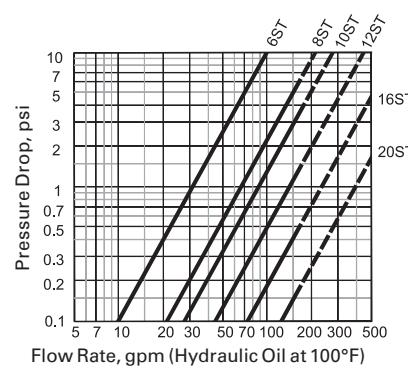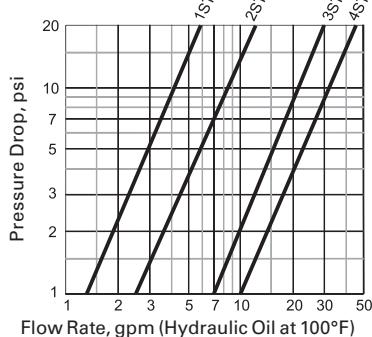

ST Series




Figure 1




Figure 2



Male End Connections

Part Number	Brass	Steel	Stainless	Coupling Type	Body Size	Port Size	Thread	Type	Fig.	Dimensions					
										A (in)	B (in)	Hex (in)	A (mm)	B (mm)	Hex (mm)
1S10	—	LL1S10		Socket/Female	1/8	1/8	1/8-27	NPTF	1	1.06	0.72	0.56	26.9	18.3	14.2
1S10BS	—			Socket/Female	1/8	1/8	1/8-28	BSPP	1	1.00	0.72	0.56	25.4	18.3	14.2
2S15	—	LL2S15		Socket/Female	1/4	1/4	1/4-18	NPTF	1	1.72	0.97	0.81	43.7	24.6	20.6
3S20	—	LL3S20		Socket/Female	3/8	3/8	3/8-18	NPTF	1	1.75	1.16	1.00	44.5	29.5	25.4
3S20BS	—	LL3S20BS		Socket/Female	3/8	3/8	3/8-19	BSPP	1	1.71	1.16	1.00	43.4	29.5	25.4
4S25	—	LL4S25		Socket/Female	1/2	1/2	1/2-14	NPTF	1	2.03	1.34	1.13	51.6	34.0	28.7
4S25BS	—	LL4S25BS		Socket/Female	1/2	1/2	1/2-14	BSPP	1	1.80	1.34	1.13	45.7	34.0	28.7
6S30	—	LL6S30		Socket/Female	3/4	3/4	3/4-14	NPTF	1	2.22	1.72	1.44	56.4	43.7	36.6
6S30BS	—	—		Socket/Female	3/4	3/4	3/4-14	BSPP	1	2.03	1.72	1.44	51.6	43.7	36.6
8S35	—	—		Socket/Female	1	1	1-11 1/2	NPTF	1	2.53	2.03	1.75	64.3	51.6	44.5
8S35BS	—	—		Socket/Female	1	1	1-11	BSPP	1	2.37	2.03	1.75	60.2	51.6	44.5

Part Number	Brass	Steel	Stainless	Coupling Type	Body Size	Port Size	Thread	Type	Fig.	Dimensions					
										C (in)	D (in)	Hex (in)	C (mm)	D (mm)	Hex (mm)
B1T10	1T10E	LL1T10		Plug/Male	1/8	1/8	1/8-27	NPTF	2	1.06	0.51	0.44	26.9	13.0	11.2
B1T15	1T15	—		Plug/Male	-/8	1/4	1/4-18	NPTF	2	1.22	0.65	0.56	31.0	16.5	14.2
B2T15	2T15	LL2T15		Plug/Male	1/4	1/4	1/4-18	NPTF	2	1.56	0.65	0.56	39.6	16.5	14.2
—	—	HL2T15**		Plug/Male	1/4	1/4	1/4-18	NPTF	2	1.56	0.65	0.56	39.6	16.5	14.2
B2T15BS	—	LL2T15BS		Plug/Male	1/4	1/4	1/4-19	BSPP	2	1.46	0.87	0.75	37.1	22.1	19.1
B3T20	3T20	LL3T20		Plug/Male	3/8	3/8	3/8-18	NPTF	2	1.69	0.79	0.69	42.9	20.1	17.5
—	—	HL3T20**		Plug/Male	3/8	3/8	3/8-18	NPTF	2	1.69	0.79	0.69	42.9	20.1	17.5
B3T20BS	—	LL3T20BS		Plug/Male	3/8	3/8	3/8-19	BSPP	2	1.50	1.01	0.88	38.1	25.7	22.4
B4T25	4T25	LL4T25		Plug/Male	1/2	1/2	1/2-14	NPTF	2	2.01	1.01	0.88	51.1	25.7	22.4
B4T25BS	—	LL4T25BS		Plug/Male	1/2	1/2	1/2-14	BSPP	2	1.82	1.15	1.00	46.2	29.2	25.4
B6T30	6T30	LL6T30		Plug/Male	3/4	3/4	3/4-14	NPTF	2	2.2	1.23	1.06	55.9	31.2	26.9
B6T30BS	—	LL6T30BS		Plug/Male	3/4	3/4	3/4-14	BSPP	2	2.08	1.44	1.25	52.8	36.6	31.8
B8T35	8T35	LL8T35		Plug/Male	1	1	1-11 1/2	NPTF	2	2.49	1.59	1.38	63.2	40.4	35.1
B8T35BS	—	—		Plug/Male	1	1	1-11	BSPP	2	2.36	2.02	1.75	59.9	51.3	44.5
B10T40	10T40	LL10T40		Plug/Male	1 1/4	1 1/4	1 1/4-11 1/2	NPTF	2	2.72	2.02	1.75	69.1	51.3	44.5
B10T40BS	—	—		Plug/Male	1 1/4	1 1/4	1 1/4-11	BSPP	2	2.55	2.31	2.00	64.8	58.7	50.8
B12T45	12T45	—		Plug/Male	1 1/2	1 1/2	1 1/2-11 1/2	NPTF	2	3.31	2.6	2.25	84.1	66.0	57.2
B12T45BS	—	—		Plug/Male	1 1/2	1 1/2	1 1/2-11	BSPP	2	3.06	2.6	2.25	77.7	66.0	57.2
B16T50	16T50	LL16T50		Plug/Male	2	2	2-11 1/2	NPTF	2	3.5	3.18	2.75	88.9	80.8	69.9
B20T55	—	—		Plug/Male	2 1/2	2 1/2	2 1/2-8	NPTF	2	4.24	3.75	3.25	107.7	95.3	82.6

**High impulse heat treated 416 stainless steel

ST Series



Female End Connections

Part Number	Brass	Steel	Stainless	Coupling Type	Body Size	Port Size	Thread	Type	Fig.	Dimensions					
										A (in)	B (in)	Hex (in)	A (mm)	B (mm)	Hex (mm)
1S11	—	LL1S11	Socket/Female	1/8	1/8	1/8-27	NPTF	1	1.06	0.72	0.56	26.9	18.3	14.2	
1S11BS	—	LL1S11BS	Socket/Female	1/8	1/8	1/8-28	BSPP	1	1.03	0.72	0.56	26.2	18.3	14.2	
2S16	—	LL2S16	Socket/Female	1/4	1/4	1/4-18	NPTF	1	1.5	0.97	0.81	38.1	24.6	20.6	
2S16BS	—	LL2S16BS	Socket/Female	1/4	1/4	1/4-19	BSPP	1	1.5	0.97	0.81	38.1	24.6	20.6	
3S21	—	LL3S21	Socket/Female	3/8	3/8	3/8-18	NPTF	1	1.59	1.16	1.00	40.4	29.5	25.4	
3S21BS	—	LL3S21BS	Socket/Female	3/8	3/8	3/8-19	BSPP	1	1.59	1.16	1.00	40.4	29.5	25.4	
4S26	—	LL4S26	Socket/Female	1/2	1/2	1/2-14	NPTF	1	1.91	1.34	1.13	48.5	34.0	28.7	
4S26BS	—	LL4S26BS	Socket/Female	1/2	1/2	1/2-14	BSPP	1	1.91	1.34	1.13	48.5	34.0	28.7	
6S31	—	LL6S31	Socket/Female	3/4	3/4	3/4-14	NPTF	1	2.06	1.72	1.44	52.3	43.7	36.6	
6S31BS	—	LL6S31BS	Socket/Female	3/4	3/4	3/4-14	BSPP	1	2.06	1.72	1.44	52.3	43.7	36.6	
8S36	—	LL8S36	Socket/Female	1	1	1-11 1/2	NPTF	1	2.33	2.03	1.75	59.2	51.6	44.5	
8S36BS	—	LL8S36BS	Socket/Female	1	1	1-11	BSPP	1	2.33	2.03	1.75	59.2	51.6	44.5	
10S41*	—	LL10S41	Socket/Female	1 1/4	1 1/4	1 1/4-11 1/2	NPTF	1	2.44	2.5	2.00	62.0	63.5	50.8	
10S41BS*	—	—	Socket/Female	1 1/4	1 1/4	1 1/4-11	BSPP	1	2.51	2.5	2.00	63.8	63.5	50.8	
12S46*	—	LL12S46	Socket/Female	1 1/2	1 1/2	1 1/2-11 1/2	NPTF	1	2.88	3.13	2.60	73.2	79.5	66.0	
12S46BS*	—	LL12S46BS	Socket/Female	1 1/2	1 1/2	1 1/2-11	BSPP	1	2.88	3.13	2.63	73.2	79.5	66.8	
16S51*	—	LL16S51	Socket/Female	2	2	2-11 1/2	NPTF	1	3.09	3.75	3.00	78.5	95.3	76.2	
16S51BS*	—	LL16S51BS	Socket/Female	2	2	2-11	BSPP	1	3.3	3.75	3.00	83.8	95.3	76.2	
20S56*	—	—	Socket/Female	2 1/2	2 1/2	2 1/2-8	NPTF	1	3.44	4.5	3.50	87.4	114.3	88.9	

Part Number	Brass	Steel	Stainless	Coupling Type	Body Size	Port Size	Thread	Type	Fig.	Dimensions					
										C (in)	D (in)	Hex (in)	C (mm)	D (mm)	Hex (mm)
B1T11	1T11	LL1T11	Plug/Male	1/8	1/8	1/8-27	NPTF	2	0.97	0.58	0.50	24.6	14.7	12.7	
B1T11BS	—	LL1T11BS	Plug/Male	1/8	1/8	1/8-28	BSPP	2	0.97	0.65	0.56	24.6	16.5	14.2	
B2T16	2T16	LL2T16	Plug/Male	1/4	1/4	1/4-18	NPTF	2	1.45	0.79	0.69	36.8	20.1	17.5	
—	—	HL2T16**	Plug/Male	1/4	1/4	1/4-18	NPTF	2	1.45	0.79	0.69	36.8	20.1	17.5	
B2T16BS	—	LL2T16BS	Plug/Male	1/4	1/4	1/4-19	BSPP	2	1.45	0.87	0.75	36.8	22.1	19.1	
B3T21	3T21	LL3T21	Plug/Male	3/8	3/8	3/8-18	NPTF	2	1.63	0.94	0.81	41.4	23.9	20.6	
—	—	HL3T21**	Plug/Male	3/8	3/8	3/8-18	NPTF	2	1.63	0.94	0.81	41.4	23.9	20.6	
B3T21BS	—	LL3T21BS	Plug/Male	3/8	3/8	3/8-19	BSPP	2	1.63	1.01	0.88	41.4	25.7	22.4	
B4T26	4T26	LL4T26	Plug/Male	1/2	1/2	1/2-14	NPTF	2	1.92	1.15	1.00	48.8	29.2	25.4	
B4T26BS	—	LL4T26BS	Plug/Male	1/2	1/2	1/2-14	BSPP	2	1.92	1.23	1.06	48.8	31.2	26.9	
B6T31	6T31	LL6T31	Plug/Male	3/4	3/4	3/4-14	NPTF	2	2.01	1.37	1.19	51.1	34.8	30.2	
B6T31BS	—	LL6T31BS	Plug/Male	3/4	3/4	3/4-14	BSPP	2	2.01	1.51	1.31	51.1	38.4	33.3	
B8T36	8T36	LL8T36	Plug/Male	1	1	1-11 1/2	NPTF	2	2.21	1.8	1.56	56.1	45.7	39.6	
B8T36BS	—	LL8T36BS	Plug/Male	1	1	1-11	BSPP	2	2.23	1.8	1.56	56.6	45.7	39.6	
B10T41	10T41	LL10T41	Plug/Male	1 1/4	1 1/4	1 1/4-11 1/2	NPTF	2	2.34	2.31	2.00	59.4	58.7	50.8	
B10T41BS	—	LL10T41BS	Plug/Male	1 1/4	1 1/4	1 1/4-11	BSPP	2	2.53	2.31	2.00	64.3	58.7	50.8	
B12T46	12T46	LL12T46	Plug/Male	1 1/2	1 1/2	1 1/2-11 1/2	NPTF	2	2.88	2.6	2.25	73.2	66.0	57.2	
B12T46BS	—	LL12T46BS	Plug/Male	1 1/2	1 1/2	1 1/2-11	BSPP	2	2.88	2.6	2.25	73.2	66.0	57.2	
B16T51	16T51	—	Plug/Male	2	2	2-11 1/2	NPTF	2	3.03	3.18	2.75	77.0	80.8	69.9	
B16T51BS	—	—	Plug/Male	2	2	2-11	BSPP	2	3.25	3.18	2.75	82.6	80.8	69.9	
B20T56	20T56	—	Plug/Male	2 1/2	2 1/2	2 1/2-8	NPTF	2	3.37	3.75	3.25	85.6	95.3	82.6	

*With Steel Sleeve

** High impulse heat treated 416 stainless steel

ST Series




Figure 1




Figure 2

Hose Stem End Connections

Part Number	Brass	Stainless	Steel	Coupling Type	Body Size	Hose I.D.	Fig.	Dimensions			
								A (in)	B (in)	A (mm)	B (mm)
1S12	LL1S12	—	—	Socket/Female	1/8	3/16	1	1.41	0.72	35.8	18.3
1S17	LL1S17	—	—	Socket/Female	1/8	1/4	1	1.41	0.72	35.8	18.3
2S17	LL2S17	—	—	Socket/Female	1/4	1/4	1	2.10	0.97	53.3	24.6
3S22	LL3S22	—	—	Socket/Female	3/8	3/8	1	2.09	1.16	53.1	29.5
4S27	LL4S27	—	—	Socket/Female	1/2	1/2	1	2.19	1.34	55.6	34.0
6S32	LL6S32	—	—	Socket/Female	3/4	3/4	1	3.19	1.72	81.0	43.7
8S37	LL8S37	—	—	Socket/Female	1	1	1	3.32	2.03	84.3	51.6
Part Number	Brass	Stainless	Steel	Coupling Type	Body Size	Hose I.D.	Fig.	Dimensions			
								C (in)	D (in)	C (mm)	D (mm)
B1T12	LL1T12	—	—	Plug/Male	1/8	3/16	2	1.28	0.44	32.5	11.2
B1T17	LL1T17	—	—	Plug/Male	1/8	1/4	2	1.28	0.44	32.5	11.2
B2T17	LL2T17	—	—	Plug/Male	1/4	1/4	2	1.93	0.56	49.0	14.2
B3T22	LL3T22	—	—	Plug/Male	3/8	3/8	2	2.09	0.69	53.1	17.5
B4T27	LL4T27	—	—	Plug/Male	1/2	1/2	2	2.17	0.88	55.1	22.4
B6T32	LL6T32	—	—	Plug/Male	3/4	3/4	2	3.17	1.19	80.5	30.2
B8T37	—	8T37	—	Plug/Male	1	1	2	3.28	1.5	83.3	38.1

Dust Caps and Dust Plugs

Series	Dust Cap	Dust Plug
2ST	—	PSDC1HK
3ST	—	PSDC2HK
6ST	PPDC4HK	PSDC4HK
8ST	PPDC6HK	—
10ST	PPDC8HK	—



L7000 Series

Full Flow (Steel)



Eaton's L7000 Series steel quick disconnect coupling is a full-flow coupling with a rugged construction. Similarly to Eaton H5000 Series, the heat treatment and hardened materials give the coupling excellent resistance to mechanical and hydraulic demands. It is suited for applications where maximum flow capacity is a requirement and valving is not needed.

Product Features

- Proprietary profile
- Full flow pull-to-connect couplings
- Ball-locking
- Excellent flow performance
- Standard body material: Zinc trivalent plated steel
- Optional dust caps and plugs (made of anodized aluminium)
- Standard seal material: NBR, FKM, EPDM

European Pressure Equipment Directive*

Couplings with nominal diameters up to and including 25 mm are designed and manufactured under Article 3.3 of the European Pressure Equipment Directive 97/23 EC. Couplings with nominal diameters greater than 25 mm are designed and manufactured in accordance with the stipulations of Module A of the European Pressure Equipment Directive 97/23 EC. They should not be used to convey unstable gases.

*Group 1 = Hazardous media / Group 2 = Other media

Applications & Markets

- Fluid transfer Lines
- Refrigerant Circuits
- Applications where maximum flow capacity is required

Physical Characteristics

Body Size (in)	Nominal Flow Diameter (mm)	Max. Operating Pressure (connected)*			
		bar	(psi)	bar	(psi)
1/8	8	1,000	14,500	1,000	14,500
1/4	10	700	10,150	700	10,150
3/8	12	600	8,700	600	8,700
1/2	15	500	7,250	500	7,250
5/8	20	400	5,800	400	5,800
1	25	300	4,350	300	4,350
1 1/4	33	200	2,900	30	435
1 1/2	40	150	2,175	24	345
2	50	100	1,450	19	275

Flow Data

The nominal flow diameter of the coupling has no impact on pressure drop, as it is wider than the circuit diameter.

Seal Elastomer Data*

Seal Elastomer	Max. Operation Temperature Range
NBR (Nitrile)	-20°C +100°C/-4°F +212°F
FKM (Fluorocarbon)	-20°C +200°C/-4°F +392°F
EPDM (Ethylene-Propylene)**	-40°C +150°C/-40°F +302°F

*For reference only, based on Eaton recommended temperatures.

**In accordance with NF L 17-241 or NAS 1613 rev. 5, depending on size.

Contact Eaton technical support for further information on fluid compatibility

L7000 Series Full Flow (Steel)




Figure 1

Sockets (Female)

Part Number	NBR*	FKM	EPDM	Body Size	Nominal Flow Diameter	Thread Size** (Female)	Dimensions						Weight				
							Fig.	A (in)	B (in)	C (in)	Across flats (in)	A (mm)	B (mm)	C (mm)	Across flats (mm)	lbs	grams
LA0700100	LA07001V0	LA07001E0	LA07001E0	1/8	8	1/8-28	1	1.63	0.94	0.83	0.63	41.5	24	21	16	0.19	86
LA0701100	LA07011V0	LA07011E0	LA07011E0	1/4	10	1/4-19	1	1.42	1.10	0.83	0.75	36	28	21	19	0.19	87
LA0702100	LA07021V0	LA07021E0	LA07021E0	3/8	12	3/8-19	1	1.50	1.34	1.02	0.90	38	34	26	23	0.28	129
LA0703100	LA07031V0	LA07031E0	LA07031E0	1/2	15	1/2-14	1	1.77	1.50	1.18	1.06	45	38	30	27	0.39	177
LA0704100	LA07041V0	LA07041E0	LA07041E0	5/8	20	5/8-14	1	2.20	1.89	1.50	1.38	56	48	38	35	0.78	355
LA0705100	LA07051V0	LA07051E0	LA07051E0	1	25	1-11	1	2.40	2.05	1.77	1.61	61	52	45	41	0.97	440
-	LA07061V0	LA07061E0	LA07061E0	1 1/4	33	1 1/4-11	1	2.64	2.95	2.36	2.16	67	75	60	55	2.15	975
-	LA07071V0	LA07071E0	LA07071E0	1 1/2	40	1 1/2-11	1	3.38	3.35	2.83	2.56	86	85	72	65	3.85	1745
-	LA07091V0	LA07091E0	LA07091E0	2	50	2-11	1	3.46	3.82	3.27	2.95	88	97	83	75	4.11	1865

*Body sizes 1 1/4, 1 1/2 and 2 are supplied with FKM seals as a standard.

**Alternative end connections available upon request.

To obtain connected length of coupling add dimensions A (Fig. 1) and G (Fig. 2) together




Figure 2

Plugs (Male)

Part Number	Body Size	Nominal Flow Diameter	Thread Size* (Female)	Dimensions						Weight						
				(in)	(mm)	BSPP	Fig.	D (in)	E (in)	F (in)	G (in)	Hex (in)	D (mm)	E (mm)	F (mm)	G (mm)
LA0700200	1/8	8	1/8-28	2	1.02	0.43	0.72	0.41	0.63	26	11	18.4	10.5	16	0.04	19
LA0701200	1/4	10	1/4-19	2	1.00	0.56	0.82	0.41	0.75	25.5	14.2	21	10.5	19	0.06	26
LA0702200	3/8	12	3/8-19	2	1.10	0.75	1.02	0.42	0.90	28	19	26	10.7	23	0.10	45
LA0703200	1/2	15	1/2-14	2	1.30	0.81	1.18	0.51	1.06	33	20.6	30	13	27	0.12	54
LA0704200	5/8	20	5/8-14	2	1.57	1.10	1.50	0.55	1.38	40	27.9	38	14	35	0.26	117
LA0705200	1	25	1-11	2	1.73	1.27	1.77	0.73	1.61	44	32.4	45	18.5	41	0.34	155
LA0706200	1 1/4	33	1 1/4-11	2	2.12	1.73	2.36	0.83	2.16	54	44	60	21	55	0.94	424
LA0707200	1 1/2	40	1 1/2-11	2	2.32	2.10	2.83	0.87	2.56	59	53.5	71.9	22	65	1.45	656
LA0709200	2	50	2-11	2	2.68	2.47	3.27	1.06	2.95	68	62.8	83	27	75	1.85	839

*Alternative end connections available upon request.

To obtain connected length of coupling add dimensions A (Fig. 1) and G (Fig. 2) together.

Dust Plugs and Dust Caps

Body Size	Socket Dust Plug Part Number	Plug Dust Cap Part Number
(in)	Anodized Aluminium	Anodized Aluminium
1/8	HD0510100	HD0510200
1/4	HD0511100	HD0511200
3/8	HD0512100	HD0512200
1/2	HD0513100	HD0513200
5/8	HD0514100	HD0514200
1	HD0515100	HD0515200
1 1/4	HD0516100	HD0516200
1 1/2	HD0517100	HD0517200
2	HD0519100	HD0519200

Socket Dust Plug



L7000 Series

Full Flow (Brass)



Eaton's L7000 Series brass quick disconnect coupling is a full-flow coupling suited for applications where maximum flow capacity is required and valving is not needed. Mainly used in fluid transfer applications where stainless steel is not a requirement, it can handle a wide range of media and offers good corrosion resistance.

Product Features

- Proprietary profile
- Full flow pull-to-connect couplings
- Ball-locking
- Excellent flow performance
- Standard body material: Nickel plated brass
- Optional dust caps and plugs (made of anodized aluminium)
- Standard seal material: NBR, FKM, EPDM

European Pressure Equipment Directive*

Couplings with nominal diameters up to and including 25 mm are designed and manufactured under Article 3.3 of the European Pressure Equipment Directive 97/23 EC.

Couplings with nominal diameters greater than 25 mm are designed and manufactured under Article 3.3 of the European Pressure Equipment Directive 97/23 EC. They should not be used to convey gases in Group 1 (hazardous).

* Group 1 = Hazardous media / Group 2 = Other media

Applications & Markets

- Pressure Washing
- Steam-Cleaning Equipment
- Fluid Transfer Lines
- Refrigerant Circuits
- Applications where maximum flow capacity is required

Physical Characteristics

Body Size (in)	Nominal Flow Diameter (mm)	Max. Operating Pressure (connected)*		
		bar	(psi)	Liquids in Groups 1 and 2 Gases in Group 2
1/8	8	300	4,350	300 4,350
1/4	10	230	3,335	230 3,335
3/8	12	175	2,535	175 2,535
1/2	15	150	2,175	150 2,175
5/8	20	125	1,810	125 1,810
1	25	100	1,450	100 1,450
1 1/4	33	60	870	30 435
1 1/2	40	49	710	24 348
2	50	39	565	19 275

*Nominal diameters over 25 mm should not be used to convey gases in Group 1 (as per PED 97/23 EC).

Flow Data

The nominal flow diameter of the coupling has no impact on pressure drop, as it is wider than the circuit diameter.

Seal Elastomer Data*

Seal Elastomer	Max. Operation Temperature Range
NBR (Nitrile)	-20°C +100°C/-4°F +212°F
FKM (Fluorocarbon)	-20°C +200°C/-4°F +392°F
EPDM (Ethylene-Propylene)**	-40°C +150°C/-40°F +302°F

*For reference only, based on Eaton recommended temperatures.

**In accordance with NF L 17-241 or NAS 1613 rev. 5, depending on size.

Contact Eaton technical support for further information on fluid compatibility.

L7000 Series

Full Flow (Brass)




Figure 1

Sockets (Female)

Part Number	NBR*	FKM	EPDM	Body Size (in)	Nominal Flow Diameter (mm)	Thread Size** (Female)	Dimensions						Weight			
							BSPP	Fig.	A (in)	B (in)	C (in)	Across flats (in)	A (mm)	B (mm)	C (mm)	Across flats (mm)
LL0700100	LL07001V0	LL07001E0	1/8	8	1/8-28	1	1.63	0.94	0.83	0.63	41.5	24	21	16	0.21	95
LL0701100	LL07011V0	LL07011E0	1/4	10	1/4-19	1	1.42	1.10	0.83	0.75	36	28	21	19	0.21	96
LL0702100	LL07021V0	LL07021E0	3/8	12	3/8-19	1	1.50	1.34	1.02	0.90	38	34	26	23	0.31	142
LL0703100	LL07031V0	LL07031E0	1/2	15	1/2-14	1	1.77	1.50	1.18	1.06	45	38	30	27	0.43	195
LL0704100	LL07041V0	LL07041E0	5/8	20	5/8-14	1	2.20	1.89	1.50	1.38	56	48	38	35	0.86	391
LL0705100	LL07051V0	LL07051E0	1	25	1-11	1	2.40	2.05	1.77	1.61	61	52	45	41	1.07	484
-	LL07061V0	LL07061E0	1 1/4	33	1 1/4-11	1	2.64	2.95	2.36	2.16	67	75	60	55	2.37	1073
-	LL07071V0	LL07071E0	1 1/2	40	1 1/2-11	1	3.38	3.35	2.83	2.56	86	85	72	65	4.23	1920
-	LL07091V0	LL07091E0	2	50	2-11	1	3.46	3.82	3.27	2.95	88	97	83	75	4.52	2052

* Body sizes 1/4, 1 1/2 and 2 are supplied with FKM seals as a standard.

** Alternative end connections available upon request.

To obtain connected length of coupling add dimensions A (Fig. 1) and G (Fig. 2) together




Figure 2

Plugs (Male)

Part Number	Body Size (in)	Nominal Flow Diameter (mm)	Thread Size* (Female)	Dimensions								Weight				
				BSPP	Fig.	D (in)	E (in)	F (in)	G (in)	Hex (in)	D (mm)	E (mm)	F (mm)	G (mm)	Hex (mm)	Ibs
LL0702000	1/8	8	1/8-28	2	1.02	0.43	0.72	0.41	0.63	26	11	18.4	10.5	16	0.05	21
LL0701200	1/4	10	1/4-19	2	1.00	0.56	0.82	0.41	0.75	25.5	14.2	21	10.5	19	0.06	29
LL0702200	3/8	12	3/8-19	2	1.10	0.75	1.02	0.42	0.90	28	19	26	10.7	23	0.11	50
LL0703200	1/2	15	1/2-14	2	1.30	0.81	1.18	0.51	1.06	33	20.6	30	13	27	0.13	59
LL0704200	5/8	20	5/8-14	2	1.57	1.10	1.50	0.55	1.38	40	27.9	38	14	35	0.28	129
LL0705200	1	25	1-11	2	1.73	1.27	1.77	0.73	1.61	44	32.4	45	18.5	41	0.38	171
LL0706200	1 1/4	33	1 1/4-11	2	2.12	1.73	2.36	0.83	2.16	54	44	60	21	55	1.03	466
LL0707200	1 1/2	40	1 1/2-11	2	2.32	2.10	2.83	0.87	2.56	59	53.5	71.9	22	65	1.59	722
LL0709200	2	50	2-11	2	2.68	2.47	3.27	1.06	2.95	68	62.8	83	27	75	2.04	923

*Alternative end connections available upon request.

To obtain connected length of coupling add dimensions A (Fig. 1) and G (Fig. 2) together.

Dust Plugs and Dust Caps

Body Size (in)	Socket Dust Plug Part Number	Plug Dust Cap Part Number
1/8	HD0510100	HD0510200
1/4	HD0511100	HD0511200
3/8	HD0512100	HD0512200
1/2	HD0513100	HD0513200
5/8	HD0514100	HD0514200
1	HD0515100	HD0515200
1 1/4	HD0516100	HD0516200
1 1/2	HD0517100	HD0517200
2	HD0519100	HD0519200

Socket Dust Plug



Plug Dust Cap



L7000 Series

Full Flow (Stainless Steel)



Eaton's L7000 Series stainless steel quick disconnect coupling is a full-flow coupling suited for applications where maximum flow capacity is required and valving is not needed. Mainly used in fluid transfer applications and offers excellent corrosion resistance.

Product Features

- Proprietary profile
- Full flow pull-to-connect couplings
- Ball-locking
- Excellent flow performance
- Standard body material: AISI 316L Stainless steel
- Optional dust caps and plugs (made of anodized aluminium)
- Standard seal material: FKM, EPDM

European Pressure Equipment Directive*

Couplings with nominal diameters up to and including 25 mm are designed and manufactured under Article 3.3 of the European Pressure Equipment Directive 97/23 EC. Couplings with nominal diameters greater than 25 mm are designed and manufactured in accordance with the stipulations of Module A of the European Pressure Equipment Directive 97/23 EC. They should not be used to convey unstable gases.

*Group 1 = Hazardous media / Group 2 = Other media

Applications & Markets

- Pressure Washing
- Steam-cleaning Equipment
- Fluid Transfer Lines
- Refrigerant Circuits
- Applications where maximum flow capacity is required

Physical Characteristics

Body Size (in)	Nominal Flow Diameter (mm)	Max. Operating Pressure (connected)			
		Non hazardous liquids & gases Group 2	Non hazardous liquids & gases Group 1	(bar)	(psi)
1/8	8	300	4,350	300	4,350
1/4	10	230	3,335	230	3,335
5/16	12	175	3,535	175	3,535
1/2	15	150	2,175	150	2,175
3/4	20	125	1,810	125	1,810
1	25	100	1,450	100	1,450
1 1/4	33	100	1,450	100	1,450
1 1/2	40	75	1,085	38	550
2	50	40	580	28	405

Flow Data

The nominal flow diameter of the coupling has no impact on pressure drop, as it is wider than the circuit diameter.

Seal Elastomer Data*

Seal Elastomer	Max. Operation Temperature Range
FKM (Fluorocarbon)	-20°C +200°C/-4°F +392°F
EPDM (Ethylene-Propylene)**	-40°C +150°C/-40°F +302°F

*For reference only, based on Eaton recommended temperatures.

**In accordance with NF L 17-241 or NAS 1613 rev. 5, depending on size.

Contact Eaton technical support for further information on fluid compatibility.

L7000 Series

Full Flow (Stainless Steel)




Figure 1

Sockets (Female)

Part Number	Body Size	Nominal Flow Diameter	Thread Size* (Female)	Dimensions						Weight					
				BSPP	Fig.	A (in)	B (in)	C (in)	Across flats (in)	A (mm)	B (mm)	C (mm)	Across flats (mm)		
LZ07001V0	LZ07001E0	1/8	8	1/8-28	1	1.63	0.94	0.83	0.63	41.5	24	21	16	0.19	86
LZ07011V0	LZ07011E0	1/4	10	1/4-19	1	1.42	1.10	0.83	0.75	36	28	21	19	0.19	87
LZ07021V0	LZ07021E0	3/8	12	3/8-19	1	1.50	1.34	1.02	0.90	38	34	26	23	0.28	129
LZ07031V0	LZ07031E0	1/2	15	1/2-14	1	1.77	1.50	1.18	1.06	45	38	30	27	0.39	177
LZ07041V0	LZ07041E0	3/4	20	3/4-14	1	2.20	1.89	1.50	1.38	56	48	38	35	0.78	355
LZ07051V0	LZ07051E0	1	25	1-11	1	2.40	2.05	1.77	1.61	61	52	45	41	0.97	440
LZ07061V0	LZ07061E0	1 1/4	33	1 1/4-11	1	2.64	2.95	2.36	2.16	67	75	60	55	2.15	975
LZ07071V0	LZ07071E0	1 1/2	40	1 1/2-11	1	3.38	3.35	2.83	2.56	86	85	72	65	3.85	1745
LZ07091V0	LZ07091E0	2	50	2-11	1	3.46	3.82	3.27	2.95	88	97	83	75	4.11	1865

*Alternative end connections available upon request.

To obtain connected length of coupling add dimensions A (Fig. 1) and G (Fig. 2) together




Figure 2

Plugs (Male)

Part Number	Body Size	Nominal Flow Diameter	Thread Size* (Female)	Dimensions						Weight						
				(in)	(mm)	BSPP	Fig.	D (in)	E (in)	F (in)	G (in)	Hex (in)	D (mm)	E (mm)	F (mm)	G (mm)
LZ0700200	1/8	8	1/8-28	2	1.02	0.43	0.72	0.41	0.63	26	11.0	18.4	10.5	16	0.04	19
LZ0701200	1/4	10	1/4-19	2	1.00	0.56	0.82	0.41	0.75	25.5	14.2	21	10.5	19	0.06	26
LZ0702200	3/8	12	3/8-19	2	1.10	0.75	1.02	0.42	0.90	28	19.0	26	10.7	23	0.10	45
LZ0703200	1/2	15	1/2-14	2	1.30	0.81	1.18	0.51	1.06	33	20.6	30	13	27	0.12	54
LZ0704200	3/4	20	3/4-14	2	1.57	1.10	1.50	0.55	1.38	40	27.9	38	14	35	0.26	117
LZ0705200	1	25	1-11	2	1.73	1.27	1.77	0.73	1.61	44	32.4	45	18.5	41	0.34	155
LZ0706200	1 1/4	33	1 1/4-11	2	2.12	1.73	2.36	0.83	2.16	54	44.0	60	21	55	0.94	424
LZ0707200	1 1/2	40	1 1/2-11	2	2.32	2.10	2.83	0.87	2.56	59	53.5	71.9	22	65	1.45	656
LZ0709200	2	50	2-11	2	2.68	2.47	3.27	1.06	2.95	68	62.8	83	27	75	1.85	839

*Alternative end connections available upon request.

To obtain connected length of coupling add dimensions A (Fig. 1) and G (Fig. 2) together.

Dust Plugs and Dust Caps

Body Size	Socket Dust Plug Part Number	Plug Dust Cap Part Number
(in)	Anodized Aluminium	Anodized Aluminium
1/8	HD0510100	HD0510200
1/4	HD0511100	HD0511200
3/8	HD0512100	HD0512200
1/2	HD0513100	HD0513200
3/4	HD0514100	HD0514200
1	HD0515100	HD0515200
1 1/4	HD0516100	HD0516200
1 1/2	HD0517100	HD0517200
2	HD0519100	HD0519200



R4000 Series (Steel)




Product Features

- Standard body material: Zinc-plated steel
- Standard seal material: NBR, FKM, EPDM

The Eaton R4000 Series steel check valves are designed for multipurpose hydraulic applications to either allow flow of fluid in one direction only or limit the line's internal pressure to the cracking pressure. Standard cracking pressures are 0.5 and 1 bar (7.25 and 14.5 psi). Alternatives can be offered upon request.

Operating Guidelines

The Eaton R4000 series is designed to handle liquids. Should applications involving gases (but not unstable gases) be considered, the user should certify that sonic frequencies will not exceed 1 Hz (one cycle per second). For further information, please contact Eaton technical support.

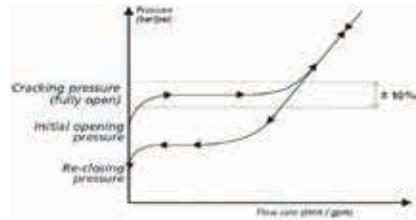

European Pressure Equipment Directive

Check valves with nominal diameters up to and including 25 mm are designed and manufactured under Article 3.3 of the European Pressure Equipment Directive 97/23 EC. Check valves with nominal diameters greater than 25 mm are designed and manufactured with the stipulations of Module A of the European Pressure Equipment Directive 97/23 EC. They should not be used to convey unstable gases. Our series R4000 check valves must not be used as safety devices (as per PED 97/23 EC).

Physical Characteristics

Body Size (in)	Nominal Flow Diameter (mm)	Max. Operating Pressure**		Rated Flow* (L/min)	(gpm)
		bar	psi		
1/8	3.8	700	10,150	700	10,150
1/4	5.7	700	10,150	700	10,150
3/8	7.6	700	10,150	700	10,150
1/2	10.3	500	7,250	500	7,250
5/8	14.2	500	7,250	500	7,250
1	16.5	500	7,250	500	7,250
1 1/4	20.5	300	4,350	300	4,350
1 1/2	25.8	300	4,350	38	550
2	34.7	300	4,350	28	405


*Indicated values refer to a 1 bar/14.5 psi pressure drop.

**Group 1 = Hazardous media / Group 2 = Other media

Applications & Markets

- All Industries
- Agriculture
- Construction
- Fluid Transfer Lines

Flow Data

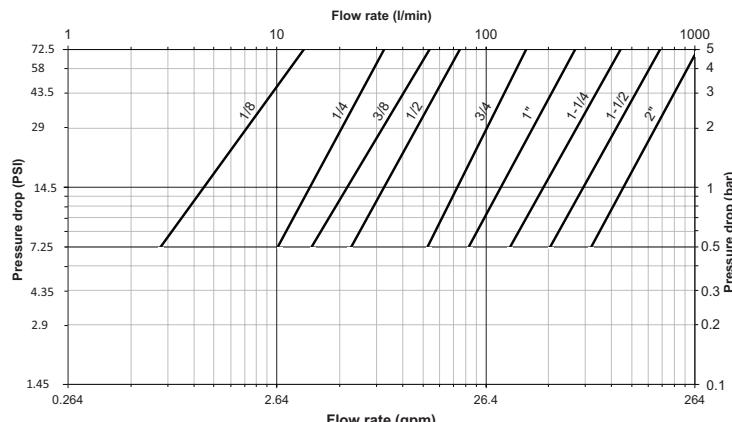

Test Fluid: Oil viscosity 30 cSt at 40°C / 104°F

Seal Elastomer Data*

Seal Elastomer	Max. Operation Temperature Range
NBR (Nitrile)	-20°C +100°C/-4°F +212°F
FKM (Fluorocarbon)	-20°C +200°C/-4°F +392°F
EPDM (Ethylene-Propylene)**	-40°C +150°C/-40°F +302°F

*For reference only, based on Eaton recommended temperatures.

**In accordance with NF L 17-241 or NAS 1613 rev. 5

Contact Eaton technical support for further information on fluid compatibility.

R4000 Series (Steel)

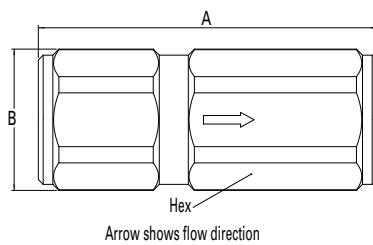


Figure 1

Cracking Pressure 0.5 bar (7.25 psi)

Part Number	Body Size			Nominal Flow Diameter	Thread Size** (Female)	Fig.	Dimensions					Weight		
	NBR*	FKM	EPDM				BSPP	Fig.	A (in)	B (in)	Hex (in)	A (mm)	B (mm)	Hex (mm)
RA0400000	RA04000V0	RA04000E0	1/8	3.8	1/8	1	1.46	0.69	0.63	37	17.5	16	0.10	45
RA0401000	RA04010V0	RA04010E0	1/4	5.7	1/4	1	1.97	0.83	0.75	50	21	19	0.18	80
RA0402000	RA04020V0	RA04020E0	3/8	7.6	3/8	1	2.36	0.98	0.90	60	25	23	0.29	130
RA0403000	RA04030V0	RA04030E0	1/2	10.3	1/2	1	2.75	1.15	1.06	70	29.2	27	0.44	200
RA0404000	RA04040V0	RA04040E0	5/8	14.2	5/8	1	3.38	1.50	1.38	86	38	35	0.93	420
RA0405000	RA04050V0	RA04050E0	1	16.5	1	1	3.94	1.77	1.61	100	45	41	1.41	640
—	RA04060V0	RA04060E0	1 1/4	20.5	1 1/4	1	5.12	2.40	2.16	130	61	55	3.46	1570
—	RA04070V0	RA04070E0	1 1/2	25.8	1 1/2	1	5.31	2.83	2.56	135	72	65	5.16	2340
—	RA04090V0	RA04090E0	2	34.7	2	1	5.90	3.30	2.95***	150	84	75***	6.57	2980

*Body size 1 1/4, 1 1/2 and 2 are supplied with FKM seals as a standard.

**Alternative end connections available upon request. depending on size (please contact Eaton technical support).

***Across flat dimension.

Cracking Pressure 1 bar (14.5 psi)

Part Number	Body Size			Nominal Flow Diameter	Thread Size** (Female)	Fig.	Dimensions					Weight		
	NBR*	FKM	EPDM				BSPP	Fig.	A (in)	B (in)	Hex (in)	A (mm)	B (mm)	Hex (mm)
RA040000B	RA04000VB	RA04000EB	1/8	3.8	1/8	1	1.46	0.69	0.63	37	17.5	16	0.10	45
RA040100B	RA04010VB	RA04010EB	1/4	5.7	1/4	1	1.97	0.83	0.75	50	21	19	0.18	80
RA040200B	RA04020VB	RA04020EB	3/8	7.6	3/8	1	2.36	0.98	0.90	60	25	23	0.29	130
RA040300B	RA04030VB	RA04030EB	1/2	10.3	1/2	1	2.75	1.15	1.06	70	29.2	27	0.44	200
RA040400B	RA04040VB	RA04040EB	5/8	14.2	5/8	1	3.38	1.50	1.38	86	38	35	0.93	420
RA040500B	RA04050VB	RA04050EB	1	16.5	1	1	3.94	1.77	1.61	100	45	41	1.41	640
—	RA04060VB	RA04060EB	1 1/4	20.5	1 1/4	1	5.12	2.40	2.16	130	61	55	3.46	1570
—	RA04070VB	RA04070EB	1 1/2	25.8	1 1/2	1	5.31	2.83	2.56	135	72	65	5.16	2340
—	RA04090VB	RA04090EB	2	34.7	2	1	5.90	3.30	2.95***	150	84	75***	6.57	2980

*Body size 1 1/4, 1 1/2 and 2 are supplied with FKM seals as a standard.

**Alternative end connections available upon request. depending on size (please contact Eaton technical support).

***Across flat dimension.

R4000 Series (Brass)




The Eaton R4000 Series brass check-valves are designed to either allow flow of fluid in one direction only or limit the line's internal pressure to the cracking pressure. Standard cracking pressures are 0.5 and 1 bar (7.25 and 14.5 psi). Alternatives can be offered upon request. It is designed to handle liquids in all industries and for fluid transfer lines.

Product Features

- Standard body material: Nickel-plated brass
- Standard seal material: NBR, FKM, EPDM

Operating Guidelines

The Eaton R4000 series is designed to handle liquids. Should applications involving gases (but not unstable gases) be considered, the user should certify that sonic frequencies will not exceed 1 Hz (one cycle per second). For further information, please contact Eaton technical support.

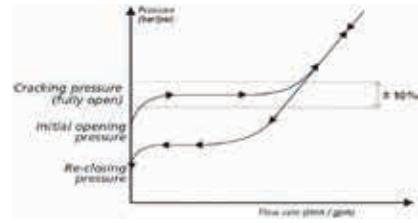

European Pressure Equipment Directive

Check valves with nominal diameters up to and including 25 mm are designed and manufactured under Article 3.3 of the European Pressure Equipment Directive 97/23 EC. Check valves with nominal diameters greater than 25 mm are designed and manufactured under Article 3.3 of the European Pressure Equipment Directive 97/23 EC. They should not be used to convey gases in Group 1 (hazardous). Working pressures for liquids of Group 1 (hazardous) and gases of Group 2 (non-hazardous) are reduced. Please refer to "Physical Characteristics" table. Our series R4000 check valves must not be used as safety devices (as per PED 97/23 EC).

Applications & Markets

- All Industries
- Agriculture
- Construction
- Fluid Transfer Lines


Physical Characteristics

Body Size (in)	Nominal Flow Diameter (mm)	Max. Operating Pressure**		Rated Flow*			
		bar	psi	bar	psi	L/min	gpm
1/8	3.8	400	5,800	400	5,800	4.5	1.19
1/4	5.7	400	5,800	400	5,800	14.2	3.75
3/8	7.6	400	5,800	400	5,800	22	5.81
1/2	10.3	250	3,625	250	3,625	32	8.45
5/8	14.2	250	3,625	250	3,625	72	19
1	16.5	250	3,625	250	3,625	117	30.9
1 1/4	20.5	150	2,175	150	2,175	188	49.66
1 1/2	25.8	150	2,175	75	1,085	232	61.29
2	34.7	100	1,450	25	360	393	103.81

*Indicated values refer to a 1 bar/14.5 psi pressure drop.

**Group 1 = Hazardous media / Group 2 = Other media

Flow Data

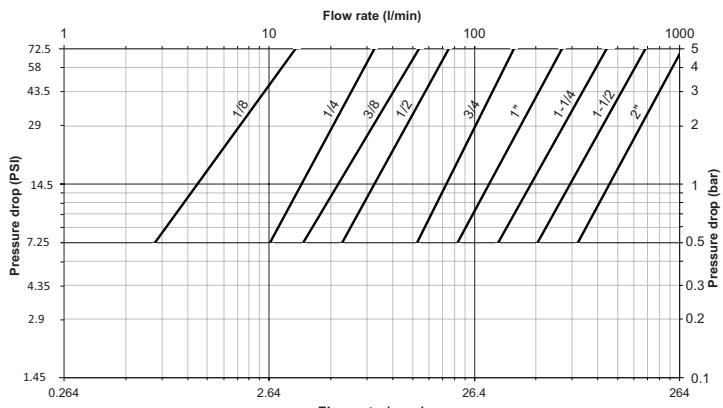

Applicable to valves with 0.5 bar (7.25 psi) cracking pressure

Seal Elastomer Data*

Seal Elastomer	Max. Operation Temperature Range
NBR (Nitrile)	-20°C +100°C/-4°F +212°F
FKM (Fluorocarbon)	-20°C +200°C/-4°F +392°F
EPDM (Ethylene-Propylene)**	-40°C +150°C/-40°F +302°F

*For reference only, based on Eaton recommended temperatures.

**In accordance with NF L 17-241 or NAS 1613 rev. 5

Contact Eaton technical support for further information on fluid compatibility.

R4000 Series

(Brass)

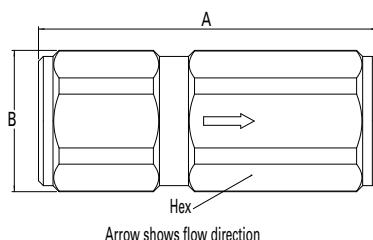


Figure 1

Cracking Pressure 0.5 bar (7.25 psi)

Part Number	Body Size			Nominal Flow Diameter	Thread Size** (Female)	Dimensions					Weight			
	NBR*	FKM	EPDM	(in)	(mm)	BSPP	Fig.	A (in)	B (in)	Hex (in)	A (mm)	B (mm)	Hex (mm)	Ibs
RL0400000	RL04000V0	RL04000EO	1/8	3.8	1/8	1	1.46	0.69	0.63	37	17.5	16	0.11	50
RL0401000	RL04010V0	RL04010EO	1/4	5.7	1/4	1	1.97	0.83	0.75	50	21	19	0.19	85
RL0402000	RL04020V0	RL04020EO	3/8	7.6	3/8	1	2.36	0.98	0.9	60	25	23	0.31	140
RL0403000	RL04030V0	RL04030EO	1/2	10.3	1/2	1	2.75	1.15	1.06	70	29.2	27	0.47	215
RL0404000	RL04040V0	RL04040EO	5/8	14.2	5/8	1	3.38	1.50	1.38	86	38	35	1.01	460
RL0405000	RL04050V0	RL04050EO	1	16.5	1	1	3.94	1.77	1.61	100	45	41	1.52	690
-	RL04060V0	RL04060EO	1 1/4	20.5	1 1/4	1	5.12	2.40	2.16	130	61	55	3.73	1690
-	RL04070V0	RL04070EO	1 1/2	25.8	1 1/2	1	5.31	2.83	2.56	135	72	65	5.71	2590
-	RL04090V0	RL04090EO	2	34.7	2	1	5.90	3.30	2.95***	150	84	75***	7.50	3400

*Body sizes 1 1/4, 1 1/2 and 2 are supplied with FKM seals as a standard.

**Alternative end connections available upon request, depending on size (please contact Eaton technical support).

***Across flat dimension.

Cracking Pressure 1 bar (14.5 psi)

Part Number	Body Size			Nominal Flow Diameter	Thread Size** (Female)	Dimensions					Weight			
	NBR*	FKM	EPDM	(in)	(mm)	BSPP	Fig.	A (in)	B (in)	Hex (in)	A (mm)	B (mm)	Hex (mm)	Ibs
RL040000B	RL04000VB	RL04000EB	1/8	3.8	1/8	1	1.46	0.69	0.63	37	17.5	16	0.11	50
RL040100B	RL04010VB	RL04010EB	1/4	5.7	1/4	1	1.97	0.83	0.75	50	21	19	0.19	85
RL040200B	RL04020VB	RL04020EB	3/8	7.6	3/8	1	2.36	0.98	0.90	60	25	23	0.31	140
RL040300B	RL04030VB	RL04030EB	1/2	10.3	1/2	1	2.75	1.15	1.06	70	29.2	27	0.47	215
RL040400B	RL04040VB	RL04040EB	5/8	14.2	5/8	1	3.38	1.50	1.38	86	38	35	1.01	460
RL040500B	RL04050VB	RL04050EB	1	16.5	1	1	3.94	1.77	1.61	100	45	41	1.52	690
-	RL04060VB	RL04060EB	1 1/4	20.5	1 1/4	1	5.12	2.40	2.16	130	61	55	3.73	1690
-	RL04070VB	RL04070EB	1 1/2	25.8	1 1/2	1	5.31	2.83	2.56	135	72	65	5.71	2590
-	RL04090VB	RL04090EB	2	34.7	2	1	5.90	3.30	2.95***	150	84	75***	7.50	3400

*Body sizes 1 1/4, 1 1/2 and 2 are supplied with FKM seals as a standard.

**Alternative end connections available upon request, depending on size (please contact Eaton technical support).

***Across flat dimension.

R4000 Series (Stainless Steel)



Product Features

- Standard body material: AISI 316L Stainless steel
- Standard seal material: FKM, EPDM


European Pressure Equipment Directive

Check valves with nominal diameters up to and including 25 mm are designed and manufactured under Article 3.3 of the European Pressure Equipment Directive 97/23 EC. Check valves with nominal diameters greater than 25 mm are designed and manufactured in accordance with the stipulations of Module A of the European Pressure Equipment Directive 97/23 EC. They should not be used to convey unstable gases. Our series R4000 check valves must not be used as safety devices (as per PED 97/23 EC).

The Eaton R4000 Series stainless steel check-valves are designed to either allow flow of fluid in one direction only or limit the line's internal pressure to the cracking pressure. Standard cracking pressures are 0.5 and 1 bar (7.25 and 14.5 psi). Alternatives can be offered upon request. It is designed to handle liquids in all industries and for fluid transfer lines. The material used offers excellent corrosion resistance.

Operating Guidelines

The Eaton R4000 series is designed to handle liquids. Should applications involving gases (but not unstable gases) be considered, the user should certify that sonic frequencies will not exceed 1 Hz (one cycle per second). For further information, please contact Eaton technical support.

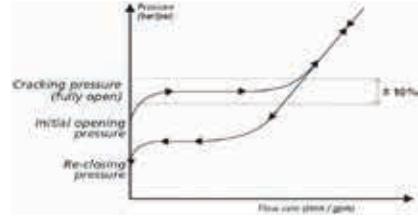

Physical Characteristics

Body Size (in) (mm)	Nominal Flow Diameter	Max. Operating Pressure**		Non hazardous liquids & gases Group 2		Non hazardous liquids & gases Group 1		Rated Flow* L/min (gpm)
		(bar) (psi)	(bar) (psi)	(bar) (psi)	(bar) (psi)	(bar) (psi)	(bar) (psi)	
1/8	3.8	400	5,800	400	5,800	400	5,800	4.5 1.19
1/4	5.7	400	5,800	400	5,800	400	5,800	14.2 3.75
3/8	7.6	400	5,800	400	5,800	22	5,800	5.81
1/2	10.3	250	3,625	250	3,625	32	3,625	8.45
5/8	14.2	250	3,625	250	3,625	72	3,625	19.00
1	16.5	250	3,625	250	3,625	117	3,625	30.90
1 1/4	20.5	150	2,175	150	2,175	188	2,175	49.66
1 1/2	25.8	150	2,175	38	550	232	550	61.29
2	34.7	150	2,175	28	405	393	405	103.81


*Indicated values refer to a 1 bar / 14.5 psi pressure drop.

**Group 1 = Hazardous media / Group 2 = Other media

Applications & Markets

- All industries
- Agriculture
- Construction
- Fluid transfer lines

Flow Data

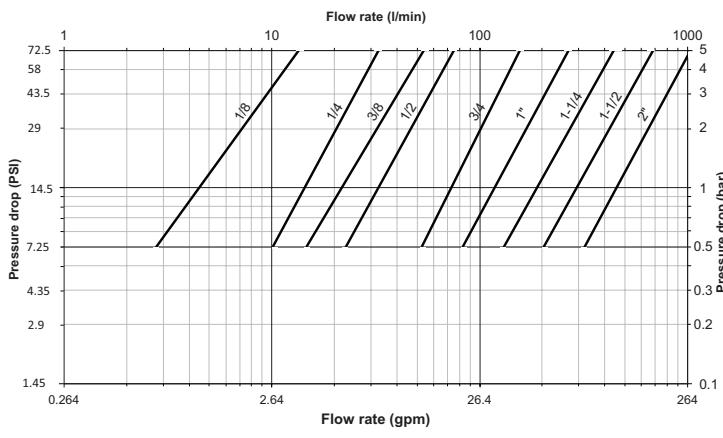

Seal Elastomer Data*

Seal Elastomer	Max. Operation Temperature Range
FKM (Fluorocarbon)*	-20°C +200°C/-4°F +392°F
EPDM (Ethylene-Propylene)**	-40°C +150°C/-40°F +302°F

*For reference only, based on Eaton recommended temperatures.

**In accordance with NF L 17-241 or NAS 1613 rev. 5

Contact Eaton technical support for further information on fluid compatibility.

R4000 Series (Stainless Steel)

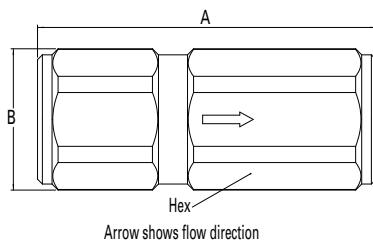


Figure 1

Cracking Pressure 0.5 bar (7 psi)

Part Number	Body Size	Nominal Flow Diameter	Thread Size* (Female)	Dimensions						Weight			
				Fig.	A (in)	B (in)	Hex (in)	A (mm)	B (mm)	Hex (mm)	lbs	grams	
RZ04000V0	RZ04000EO	1/8	3.8	1/8	1	1.46	0.69	0.63	37	17.5	16	0.10	45
RZ04010V0	RZ04010EO	1/4	5.7	1/4	1	1.97	0.83	0.75	50	21	19	0.18	80
RZ04020V0	RZ04020EO	3/8	7.6	5/8	1	2.36	0.98	0.90	60	25	23	0.29	130
RZ04030V0	RZ04030EO	1/2	10.3	1/2	1	2.75	1.15	1.06	70	29.2	27	0.44	200
RZ04040V0	RZ04040EO	5/8	14.2	5/8	1	3.38	1.50	1.38	86	38	35	0.93	420
RZ04050V0	RZ04050EO	1	16.5	1	1	3.94	1.77	1.61	100	45	41	1.41	640
RZ04060V0	RZ04060EO	1 1/4	20.5	1 1/4	1	5.12	2.40	2.16	130	61	55	3.46	1570
RZ04070V0	RZ04070EO	1 1/2	25.8	1 1/2	1	5.31	2.83	2.56	135	72	65	5.16	2340
RZ04090V0	RZ04090EO	2	34.7	2	1	5.90	3.30	2.95**	150	84	75**	6.57	2980

*Alternative end connections available upon request, depending on size (please contact Eaton technical support).

**Across flat dimension.

Cracking Pressure 1 bar (14.5 psi)

Part Number	Body Size	Nominal Flow Diameter	Thread Size* (Female)	Dimensions						Weight			
				Fig.	A (in)	B (in)	Hex (in)	A (mm)	B (mm)	Hex (mm)	lbs	grams	
RZ04000VB	RZ04000EB	1/8	3.8	1/8	1	1.46	0.69	0.63	37	17.5	16	0.10	45
RZ04010VB	RZ04010EB	1/4	5.7	1/4	1	1.97	0.83	0.75	50	21	19	0.18	80
RZ04020VB	RZ04020EB	3/8	7.6	5/8	1	2.36	0.98	0.90	60	25	23	0.29	130
RZ04030VB	RZ04030EB	1/2	10.3	1/2	1	2.75	1.15	1.06	70	29.2	27	0.44	200
RZ04040VB	RZ04040EB	5/8	14.2	5/8	1	3.38	1.50	1.38	86	38	35	0.93	420
RZ04050VB	RZ04050EB	1	16.5	1	1	3.94	1.77	1.61	100	45	41	1.41	640
RZ04060VB	RZ04060EB	1 1/4	20.5	1 1/4	1	5.12	2.40	2.16	130	61	55	3.46	1570
RZ04070VB	RZ04070EB	1 1/2	25.8	1 1/2	1	5.31	2.83	2.56	135	72	65	5.16	2340
RZ04090VB	RZ04090EB	2	34.7	2	1	5.90	3.30	2.95**	150	84	75**	6.57	2980

*Alternative end connections available upon request, depending on size (please contact Eaton technical support).

**Across flat dimension.

FD15 Series

Oil Sampling Valve



Eaton's FD15 Series Oil Sampling Valve is designed for in-line sampling of system fluids without system shutdown, usually in less than one minute, and without fluid contamination.

Product Features

- Standard seal material: Buna-N
- Corrosion resistant plated steel with brass internal components
- Operating Temperature Range: -65°F to +275°F (-53°C to +135°C)
- Minimum Burst Pressure: 12,000 psi
- Minimum Particle Restriction: 500 microns
- Maximum Torque to Operate: 10 in. lbs.

- FD15-1000-04 is qualified to the MIL-V-81940/2-1

Note: This valve is not intended for aerospace applications.

Applications & Markets

- Engine oil
- Lubricating oil
- Transmission fluid and hydraulic fluids in mobile construction equipment, military vehicles, trucks and stationary equipment

Operation

- For best results, Eaton FD15 Oil Sampling Valves should be installed in dynamic fluid lines in low pressure and return lines. If only one sampling point can be chosen, it should be in the return line, upstream of any return line filter. This will insure a representative sample of all components in the fluid system for their present condition.

Instructions

1. Remove metal dustcover on discharge port.
2. Discharge approximately 200 ml of oil to flush valve by turning knurled knob 1/4 turn to the right. Dispose of this sample in the appropriate manner.
3. Locate clean oil sample bottle under discharge port. (Sample bottles are usually supplied by the oil analysis lab.)
4. Turn knurled knob 1/4 turn to the right until bottle is filled to the desired level. The knob can be backed off to throttle the rate of flow.
5. When bottle is filled let go of the knurled knob, the valve will close automatically. Replace metal dustcover wrench tight.

Notes

As required in MIL-V-81940/2-1 this valve's flow rate is between 100 and 1500 milliliters per minute at pressures from 0–50 psi. (MIL-V-81940/2-1 applies only to pressures from 50–300 psi.)

The 1/4" NPTF version is qualified to MIL-V-81940/2-1 and its performance is representative of the other inlet port configurations listed above. QPL-81940-9 6-5-89

FD15 Series Oil Sampling Valve

**Male Pipe Thread
50-300 psi**




Figure 1

**Male SAE O-Ring Thread
50-300 psi**




Figure 2

Dimensions (Male Pipe Thread)

Part Number Buna-N	Sampling Type	Port Size	Thread Type	Dimensions							
				Fig. A	B	C	Hex ①	Hex ②	Hex ③		
mm (in)	mm (in)	mm (in)	mm (in)	mm (in)	mm (in)	mm (in)	mm (in)	mm (in)	mm (in)		
FD15-1000-02	50-300 psi	1/8	1/8-27	Male Pipe Thread	1	61.5 (2.42)	25.4 (1.00)	33.0 (1.30)	17.5 (.69)	9.7 (.38)	- -
FD15-1000-04	50-300 psi	1/4	1/4-18	Male Pipe Thread	1	65.0 (2.56)	25.4 (1.00)	33.0 (1.30)	17.5 (.69)	9.7 (.38)	- -

Dimensions (Male SAE O-Ring Thread)

Part Number Buna-N	Sampling Type	Port Size	Thread Type	Dimensions							
				Fig. A	B	C	Hex ①	Hex ②	Hex ③		
mm (in)	mm (in)	mm (in)	mm (in)	mm (in)	mm (in)	mm (in)	mm (in)	mm (in)	mm (in)		
FD15-1002-04	50-300 psi	7/16	7/16-20	Male SAE O-Ring Thread	2	70.9 (2.79)	25.4 (1.00)	33.0 (1.30)	17.5 (.69)	9.7 (.38)	14.2 (.56)

Dimensions (Male Pipe Thread)

Part Number Buna-N	Sampling Type	Port Size	Thread Type	Dimensions							
				Fig. A	B	C	Hex ①	Hex ②	Hex ③		
mm (in)	mm (in)	mm (in)	mm (in)	mm (in)	mm (in)	mm (in)	mm (in)	mm (in)	mm (in)		
FD15-1026-04	0-50 psi	1/4	1/4-18	Male Pipe Thread	3	65.0 (2.56)	25.4 (1.00)	33.0 (1.30)	17.5 (.69)	9.7 (.38)	- -

Dimensions Male SAE O-Ring Thread

Part Number Buna-N	Sampling Type	Port Size	Thread Type	Dimensions							
				Fig. A	B	C	Hex ①	Hex ②	Hex ③		
mm (in)	mm (in)	mm (in)	mm (in)	mm (in)	mm (in)	mm (in)	mm (in)	mm (in)	mm (in)		
FD15-1025-04	0-50 psi	7/16	7/16-20	Male SAE O-Ring Thread	4	70.9 (2.79)	25.4 (1.00)	33.0 (1.30)	17.5 (.69)	9.7 (.38)	14.2 (.56)

**Male Pipe Thread
0-50 psi**




Figure 3

**Male SAE O-Ring Thread
0-50 psi**




Figure 4

FD90 Series

Diagnostic Coupling

SAE J1502 Interchange



Eaton's FD90 Series diagnostic coupling is designed to connect and disconnect pressure gauges to hydraulic systems, eliminating the need for permanent gauges. The maximum operating pressure is 7,000 psi.

Product Features

- Automatic sleeve for one hand push-to-connect operation
- Flush face valving provides minimal fluid loss and low air inclusion
- Self-sealing valve design
- allows connection and disconnection at 500 psi
- Broad range of end configurations for system accessibility
- Standard seal material:

- Buna-N
- Standard seal material: High resistance carbon steel with zinc trivalent plating
- Diagnostic pressure testing for hydraulic systems

Applications & Markets

Physical Characteristics

Coupling Body Size	Max. Operating Pressure	Min. Burst Pressure Connected	Vacuum Connected Only	Rated Flow	Air Inclusion	Fluid Loss
(in)	(bar) (psi)	(bar) (psi)	(in./Hg)	(lpm) (gpm)	cc. max.	cc.max.
1/4	483 (7,000)	1,931 (28,000)	28	1.89 (0.6)	0.02	0.10

Dimensions (Female Pipe, Valved)





Part Number Buna-N	Part Number with Dust Cap Buna-N	Coupling Type	Body Size	Port Size	Thread	Type	Fig.	Dimensions		
								A	B	Hex ①
FD90-1034-02-04	FD90-1035-02-04	Plug/Male	1/4	1/8	1/8 - 27	Female NPT	1	43.2 (1.70)	-	15.7 (0.62)
FD90-1021-02-04	—	Socket/Female	1/4	1/8	1/8 - 27	Female NPT	2	49.5 (1.95)	25.4 (1.00)	19.1 (0.75)
FD90-1034-04-04	FD90-1035-04-04	Plug/Male	1/4	1/4	1/4 - 18	Female NPT	1	48.3 (1.90)	-	19.1 (0.75)
FD90-1021-04-04	—	Socket/Female	1/4	1/4	1/4 - 18	Female NPT	2	57.2 (2.25)	25.4 (1.00)	19.1 (0.75)

Dimensions (Male SAE O-Ring, Valved)

Part Number Buna-N	Part Number with Dust Cap Buna-N	Coupling Type	Body Size	Port Size	Thread	Type	Fig.	Dimensions		
								A	B	Hex ①
FD90-1044-03-04	FD90-1004-03-04	Plug/Male	1/4	3/8	3/8 - 24	Male SAE O-Ring	3	38.6 (1.52)	-	15.7 (0.62)
FD90-1044-04-04	FD90-1004-04-04	Plug/Male	1/4	7/16	7/16 - 20	Male SAE O-Ring	3	40.1 (1.58)	-	15.7 (0.62)
FD90-1044-05-04	FD90-1004-05-04	Plug/Male	1/4	1/2	1/2 - 20	Male SAE O-Ring	3	33.5 (1.32)	-	15.7 (0.62)
FD90-1044-06-04	FD90-1004-06-04	Plug/Male	1/4	9/16	9/16 - 18	Male SAE O-Ring	3	33.5 (1.32)	-	17.5 (0.69)

Dimensions (Male Pipe, Valved)

Part Number Buna-N	Part Number with Dust Cap Buna-N	Coupling Type	Body Size	Port Size	Thread	Type	Fig.	Dimensions		
								A	B	Hex ①
FD90-1012-02-04	FD90-1045-02-04	Plug/Male	1/4	1/8	1/8 - 27	Male NPT	4	40.6 (1.60)	-	15.7 (0.62)
FD90-1012-04-04	FD90-1045-04-04	Plug/Male	1/4	1/4	1/4 - 18	Male NPT	4	37.8 (1.49)	-	17.5 (0.69)



FD90 Series

Diagnostic Coupling

SAE J1502 Interchange




Figure 5




Figure 6




Figure 7




Figure 8

Dimensions (Metric Male O-Ring, Valved)

Part Number Buna-N	Part Number with Dust Cap Buna-N	Coupling Type	Body Size	Port Size	Thread	Type	Fig.	Dimensions A mm (in)	Dimensions B mm (in)	Hex ① mm (in)	
FD90-1046-06-04	FD90-1047-06-04	Plug/Male	1/4	M14	M14x1.5	Male O-Ring	5	38.5 (1.52)	-	-	19.1 (0.75)

Dimensions (Female SAE O-Ring, Valved)

Part Number Buna-N	Coupling Type	Body Size	Port Size	Thread	Type	Fig.	Dimensions A mm (in)	Dimensions B mm (in)	Hex ① mm (in)
FD90-1041-04-04	Socket/Female	1/4	7/16	7/16 - 20	Female SAE O-Ring	2	55.9 (2.20)	25.40 (1.00)	19.1 (0.75)

Dimensions (Male ORS Bulkhead, Valved)

Part Number Buna-N	Coupling Type	Body Size	Port Size	Thread	Type	Fig.	Dimensions A mm (in)	Dimensions B mm (in)	Hex ① mm (in)
FD90-1206-04-04	Plug/Male	1/4	9/16	9/16 - 18	Male ORS Bulkhead	6	62.5 (2.46)	20.6 (0.81)	20.6 (0.81)

Dimensions (Male ORS Bulkhead, Valved)

Part Number Buna-N	Coupling Type	Body Size	Port Size	Thread	Type	Fig.	Dimensions A mm (in)	Dimensions B mm (in)	Hex ① mm (in)
FD90-1061-04-04	Plug/Male	1/4	9/16	9/16 - 18	Female ORS Swivel	7	46.5 (1.79)	22.1 (0.87)	17.5 (0.69)
FD90-1061-06-04	Plug/Male	1/4	11/16	11/16 - 16	Female ORS Swivel	7	46.5 (1.83)	23.9 (0.94)	20.6 (0.81)
FD90-1061-08-04	Plug/Male	1/4	13/16	13/16 - 16	Female ORS Swivel	7	49.0 (1.93)	27.4 (1.08)	23.9 (0.94)

Dimensions (Male Metric O-Ring, Valved)

Part Number Buna-N	Coupling Type	Body Size	Port Size	Thread	Type	Fig.	Dimensions A mm (in)	Dimensions B mm (in)	Hex ① mm (in)
FD90-1090-10-04	Plug/Male	1/4	M10	M10x1	Metric O-Ring	8	40.1 (1.58)	18.3 (0.72)	— —

Dust Cap for Plug/Male Halves

Body Size	Part Number
1/4	FD90-1040-04-04

Dust Cap for
Plug/Male Halves

FD48 Series

Parker Bruning SM-250 Interchange



Product Features

- Self-sealing poppet valves provide excellent high and low pressure sealing
- PUSH-PULL™ ball latch design allows quick and easy connection and disconnection of fluid lines
- Heat-treated and plated steel for wear and corrosion resistance
- Standard seal material: Buna-N
- Standard seal material: High resistance carbon steel with zinc trivalent plating

Physical Characteristics

Body Size	Max. Operating Pressure	Min. Burst Pressure Connected	Vacuum Connected Only	Rated Flow	Air Inclusion	Fluid Loss
(in)	(bar) (psi)	(bar) (psi)	(in./Hg)	(lpm) (gpm)	cc. max.	cc.max.
1/4	210 (3,000)	840 (12,000)	28	11 (1.5)	.50	1.10

Dimensions (Female NPT, Valved)

Part Number Buna-N	Coupling Type	Body Size	Port Size	Thread	Type	Fig.	Dimensions				
							A	B	Hex ①		
mm	(in)	mm	(in)	mm	(in)	mm	mm	(in)	mm	(in)	
FD48-1002-04-04	Plug/Male	1/4	1/4	1/4-18	Female NPT	1	36.8	(1.45)	-	-	19.0 (.75)
FD48-1001-04-04	Socket/Female	1/4	1/4	1/4-18	Female NPT	2	51.1	(2.01)	26.9	(1.06)	20.6 (.81)




Figure 1





Figure 2

Applications & Markets

- Hydraulic and fluid transfer
- Agricultural equipment

Flow Data

Pressure Drop Versus Flow Graph

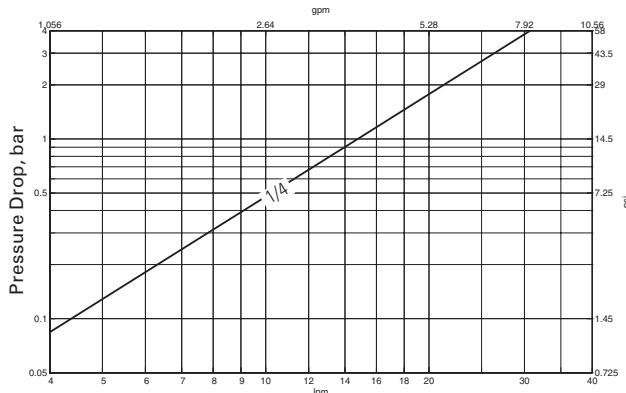

Gallons Per Minute Flow
Test Fluid: MIL-H-5606 Oil at 100°F

Part Number (Buna-N)	Body Size
FD48-1042-04*	1/4

*Fits both plug/male and socket/female halves



Dust Cap/Plug

K8000 Series



Eaton's K8000 series hydraulic screw to connect quick disconnect coupling is best for applications where vibration is present and a threaded solution is needed to lock in place.

Product Features

- Connection by screwing up the locking sleeve
- Offers internal flat face valve to minimize air inclusion and fluid loss
- Proprietary interchange
- Standard body material: Zinc trivalent plated steel
- Standard seal material: NBR

Physical Characteristics

DN/ND	Max. Operating Pressure		Rated Flow		Air Inclusion
	(bar)	(psi)	(bar)	(gpm)	ml max.
8	250	3,625	12	3.17	0.09

Applications & Markets

- Ag and Forestry Equipment

Flow Data


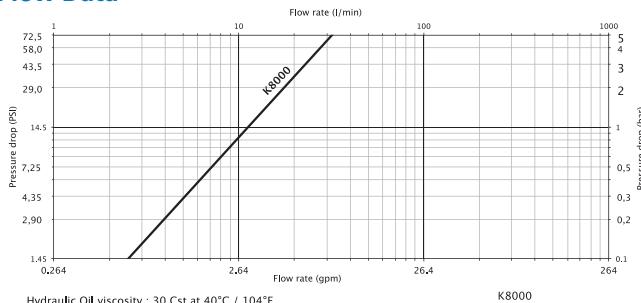


Figure 1




Figure 2

DN/ND	Socket and Dust Plug	Socket Dust Plug Only	Coupling Type	Connection	Fig.	A	Dimensions		Across Flats	Hex				
	(mm)	(mm)	(mm)				(mm)	(mm)						
8	KA0832718	KA0812700	Socket/Female	M18X150	1	55	45.1	27.9	23	41				
DN/ND	Plug and Dust Cap	Plug Dust Cap Only	Coupling Type	Connection	Fig.	D	Dimensions		H	I				
							E	F	G	Tube	Hex 1	Hex2		
							(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		
8	KA0832412		Plug/Male	M18X150	2	52	36	23	M18X1,50	5	38	12	36	27
8	KA0832413	KP0812400	Plug/Male	M20X150	2	51	36	23	M20X1,50	5	37	13	36	27
	KA0802412		Plug/Male	G 1/2"	2	48	36	15	G 1/2-14"	-	34	-	36	-

Q9000 Series



Eaton's Q9000 Series is a brake away coupling used on agriculture and forestry vehicles.

Product Features

- Pull-to-connect double shut off
- Minimum air inclusion and fluid loss
- Profile in accordance to ISO 5676 and NFU 16-006 standards
- Standard body material: Zinc trivalent plated steel
- Standard seal material: NBR

Physical Characteristics

DN/ND	Max. Operating Pressure		Rated Flow		Air Inclusion
	(bar)	(psi)	(bar)	(gpm)	ml max.
8	150	2,175	19	5.02	0.80

Applications & Markets

- Trailer Brake Circuits on Ag and Forestry Vehicles

Flow Data


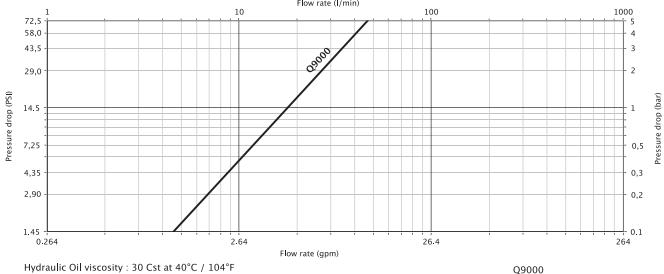


Figure 1

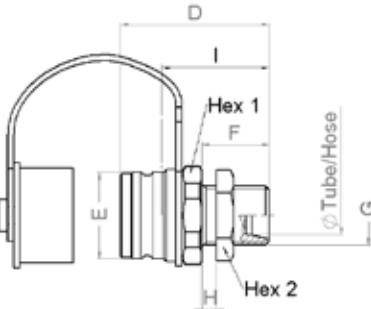


Figure 2

DN/ND	Socket and Dust Plug	Socket Dust Plug Only	Coupling Type	Connection	Fig. A	Dimensions		
	(mm)	(mm)	(mm)			B	C	Hex
8	QA0932118	QA0912100	Socket/Female	M18X150	1	55.5	44	30.2 27
DN/ND	Plug and Dust Cap	Plug Dust Cap Only	Coupling Type	Connection	Fig. D	Dimensions		
(mm)					Fig. D	E	F	G
						(mm)	(mm)	(mm)
8	QA0932212	QP0912200	Plug/Male	M18X150	2	49	30	21 M18x1,50 5
	QA0932213		Plug/Male	M20X150	2	51.0	30	23 M20x1,50 5 34 32 24
								36 32 27

H55000 Series



Eaton's H55000 series hydraulic ball valved quick disconnect coupling is ideal for agriculture and forestry equipment.

Product Features

- May interchange with other makes of couplings with same profile
- Pull-to-Connect double shut off valve
- Stainless steel ball valves and springs
- Standard body material: Zinc trivalent plated steel
- Standard seal: NBR

Physical Characteristics

Coupling Size	DN/ND	Max. Operating Pressure (bar)	Max. Operating Pressure (psi)	Rated Flow (lpm)	Fluid Loss (gpm)	ml max.
3/8"	7.4	250	3,625	19	5.02	0.50
1/2"	8.9	250	3,625	28	7.40	1.32

Applications & Markets

- Hydraulic Circuits and Equipment
- Forestry
- Agriculture
- Iron and Steel Industry

Flow Data


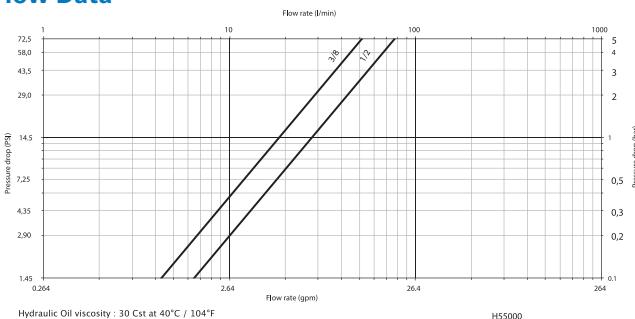


Figure 1




Figure 2

DN/ND (mm)	Socket/ Female	Socket Dust Plug	Coupling Type	Body Size	Thread	Fig.	Dimensions				
							A (mm)	B (mm)	C (mm)	Hex (mm)	
7.4	HA5502100	HD0512100*	Socket/Female	3/8"	G 3/8	1	63	34	27	24	
8.9	HA5503100	HD0513100* HP1513100**	Socket/Female	1/2"	G 1/2	1	70	38	30	27	
DN/ND (mm)	Plug/Male	Plug Dust Cap	Coupling Type	Body Size	Thread	Fig.	Dimensions				
							D (mm)	E (mm)	F (mm)	G (mm)	Hex (mm)
7.4	HA5502200	HD0512200*	Plug/Male	3/8"	G 3/8	2	42.5	19	27	22.5	24
8.9	HA5503200	HD0513200* HP1513200**	Plug/Male	1/2"	G 1/2	2	48.0	20.6	30	26.5	27

*Dural/Aluminum

**PVC

5400 Series

Low Air Inclusion Refrigerant



Eaton's 5400 Series low air inclusion product line is designed for air conditioning, refrigerant, gaseous and fluid transfer applications.

Product Features

- Brazed or threaded end connections for versatility of installation on tubing or hose
- Tubular valve construction for low fluid loss and air inclusion
- Thread together design allows connection and disconnection against pressure
- Lock washer and jam nut standard for optional bulkhead mounting
- Standard seal material: Neoprene
- Guardian Seal™ plating for excellent corrosion resistance


Physical Characteristics

Coupling Size (in)	Max. Operating Pressure Connected		Min. Burst Pressure Connected		Max. Operating Pressure Disconnected Male Half		Female Half		Vacuum Connected Only (in./Hg)	Rated Flow (lpm)	Air Inclusion cc. max.	Fluid Loss .05	
	(bar)	(psi)	(bar)	(psi)	(bar)	(psi)	(bar)	(psi)					
1/4	207	3,000	621	9,000	172	2,500	52	750	28	8	2	.10	.05
1/2	121	1,750	359	5,200	121	1,750	52	750	28	53	14	.10	.10
3/4	48	700	145	2,100	48	700	45	650	28	132	35	.30	.10
1	48	700	145	2,100	48	700	21	300	28	284	75	.50	.20

Applications & Markets

- Mobile air conditioning and refrigerant

Flow Data

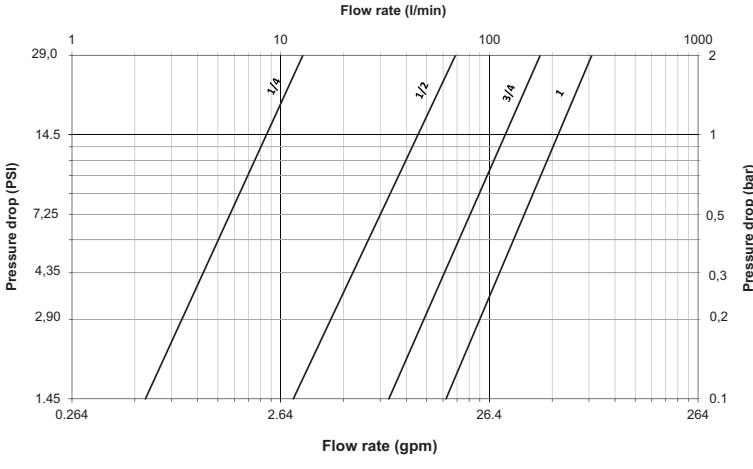

5400 Series Low Air Inclusion Refrigerant




Figure 1




Figure 2




Figure 3




Figure 4




Figure 5




Figure 6




Figure 7

Dimensions – No Adapter

Part Number	Coupling Type	Body Size	Type	Fig.	Dimensions		B	Hex ①	Hex ②	Hex ③
Neoprene					A	(in)	mm (in)	mm (in)	mm (in)	mm (in)
5400-S2-4	Male	1/4	No Adapter	1	27.4	(1.08)	21.1	.83)	.75)	-
5400-S5-4	Female	1/4	No Adapter	2	33.3	(1.31)	21.1	.83)	.63)	.75)
5400-S2-8	Male	1/2	No Adapter	1	34.8	(1.37)	32.0	(1.26)	.14)	-
5400-S5-8	Female	1/2	No Adapter	2	40.6	(1.60)	33.0	(1.30)	.02)	.18)
5400-S2-12	Male	3/4	No Adapter	1	44.2	(1.74)	46.4	(1.83)	.61)	-
5400-S5-12	Female	3/4	No Adapter	2	55.1	(2.17)	45.0	(1.77)	.38)	.61)
5400-S2-16	Male	1	No Adapter	1	46.5	(1.83)	53.0	(2.09)	.89)	-
5400-S5-16	Female	1	No Adapter	2	61.1	(2.41)	56.0	(2.20)	.77)	.97)

Dimensions – SAE 37° (JIC) (Dimensional reference only)

Part Number	Coupling Type	Body Size	Port Size	Thread	Type	Fig.	Dimensions		B	Hex ①	Hex ②	Hex ③
Buna-N							A	(in)	mm (in)	mm (in)	mm (in)	mm (in)
*Couplings must be ordered by components as shown on page 147.												
5410-S17-4-4*	Male	1/4	7/16	7/16-20	SAE 37° (JIC)	3	47.8	(1.88)	21.1	.83)	.75)	-
5410-S14-4-4*	Female	1/4	7/16	7/16-20	SAE 37° (JIC)	4	49.0	(1.93)	21.1	.83)	.63)	.75)
5410-4-4*	Complete	1/4	7/16	7/16-20	SAE 37° (JIC)	5	89.9	(3.54)	-	-	-	-
5410-S17-6-4*	Male	1/4	9/16	9/16-18	SAE 37° (JIC)	3	48.0	(1.89)	21.1	.83)	.75)	-
5410-S14-6-4*	Female	1/4	9/16	9/16-18	SAE 37° (JIC)	4	49.3	(1.94)	21.1	.83)	.63)	.75)
5410-6-4*	Complete	1/4	9/16	9/16-18	SAE 37° (JIC)	5	90.4	(3.56)	-	-	-	-
5410-S17-6-8*	Male	1/2	9/16	9/16-18	SAE 37° (JIC)	3	55.4	(2.18)	31.8	(1.25)	29	(1.14)
5410-S14-6-8*	Female	1/2	9/16	9/16-18	SAE 37° (JIC)	4	61.7	(2.43)	33.3	(1.31)	26	(1.02)
5410-6-8*	Complete	1/2	9/16	9/16-18	SAE 37° (JIC)	5	107.4	(4.23)	-	-	-	-
5410-S17-8-8*	Male	1/2	3/4	3/4-16	SAE 37° (JIC)	3	57.9	(2.28)	31.8	(1.25)	29	(1.14)
5410-S14-8-8*	Female	1/2	3/4	3/4-16	SAE 37° (JIC)	4	64.3	(2.53)	33.3	(1.31)	26	(1.02)
5410-8-8*	Complete	1/2	3/4	3/4-16	SAE 37° (JIC)	5	112.8	(4.44)	-	-	-	-
5410-S17-10-12*	Male	3/4	7/8	7/8-14	SAE 37° (JIC)	3	69.9	(2.75)	46.5	(1.83)	41	(1.62)
5410-S14-10-12*	Female	3/4	7/8	7/8-14	SAE 37° (JIC)	4	80.3	(3.16)	45.7	(1.80)	35	(1.38)
5410-10-12*	Complete	3/4	7/8	7/8-14	SAE 37° (JIC)	5	135.4	(5.33)	-	-	-	-
5410-S17-12-12*	Male	3/4	1 1/16	1 1/16-12	SAE 37° (JIC)	3	72.6	(2.86)	46.5	(1.83)	41	(1.62)
5410-S14-12-12*	Female	3/4	1 1/16	1 1/16-12	SAE 37° (JIC)	4	83.1	(3.27)	45.7	(1.80)	35	(1.38)
5410-12-12*	Complete	3/4	1 1/16	1 1/16-12	SAE 37° (JIC)	5	140.7	(5.54)	-	-	-	-
5410-S17-16-16*	Male	1	1 5/16	1 5/16-12	SAE 37° (JIC)	3	75.9	(2.99)	53.3	(2.10)	48	(1.89)
5410-S14-16-16*	Female	1	1 5/16	1 5/16-12	SAE 37° (JIC)	4	89.7	(3.53)	56.9	(2.24)	45	(1.77)
5410-16-16*	Complete	1	1 5/16	1 5/16-12	SAE 37° (JIC)	5	149.6	(5.89)	-	-	-	-

Above items must be ordered at the component level - see page 148.

5400 Series


Low Air Inclusion Refrigerant

Dimensions – Braze Tubing Adapter (Dimensional reference only)

Part Number Neoprene	Coupling Type	Body Size	Tube O.D. Size	Type	Fig.	Dimensions	A	B	Hex ①	Hex ②	Hex ③
							mm (in)	mm (in)	mm (in)	mm (in)	mm (in)
*Couplings must be ordered by components as shown on page 147.											
5401-S17-4-4*	Male	1/4	1/4	Braze Tubing Adapter	6	38.6 (1.52)	21.1 (.83)	19 (.75)	- -	16.0 (.63)	
5401-S14-4-4*	Female	1/4	1/4	Braze Tubing Adapter	7	39.9 (1.57)	21.1 (.83)	16.0 (.63)	19 (.75)	16.0 (.63)	
5401-S17-6-4*	Male	1/4	3/8	Braze Tubing Adapter	6	38.6 (1.52)	21.1 (.83)	19 (.75)	- -	16.0 (.63)	
5401-S14-6-4*	Female	1/4	3/8	Braze Tubing Adapter	7	39.9 (1.57)	21.1 (.83)	16.0 (.63)	19 (.75)	16.0 (.63)	
5410-S17-6-8*	Male	1/2	3/8	Braze Tubing Adapter	6	44.5 (1.75)	33.3 (1.31)	29 (1.14)	- -	25.4 (1.00)	
5401-S14-6-8*	Female	1/2	3/8	Braze Tubing Adapter	7	50.8 (2.00)	33.3 (1.31)	26 (1.02)	30 (1.18)	25.4 (1.00)	
5401-S17-8-8*	Male	1/2	1/2	Braze Tubing Adapter	6	44.5 (1.75)	33.3 (1.31)	29 (1.14)	- -	25.4 (1.00)	
5401-S14-8-8*	Female	1/2	1/2	Braze Tubing Adapter	7	50.8 (2.00)	33.3 (1.31)	26 (1.02)	30 (1.18)	25.4 (1.00)	
5401-S17-10-12*	Male	3/4	5/8	Braze Tubing Adapter	6	62.7 (2.47)	45.7 (1.80)	41 (1.62)	- -	35.1 (1.38)	
5401-S14-10-12*	Female	3/4	5/8	Braze Tubing Adapter	7	73.2 (2.88)	45.7 (1.80)	35 (1.38)	41 (1.62)	35.1 (1.38)	
5401-S17-12-12*	Male	3/4	3/4	Braze Tubing Adapter	6	62.7 (2.47)	45.7 (1.80)	41 (1.62)	- -	35.1 (1.38)	
5401-S14-12-12*	Female	3/4	3/4	Braze Tubing Adapter	7	73.2 (2.88)	45.7 (1.80)	35 (1.38)	41 (1.62)	35.1 (1.38)	
5401-S17-16-16*	Male	1	1	Braze Tubing Adapter	6	71.1 (2.80)	56.9 (2.24)	48 (1.89)	- -	44.5 (1.75)	
5401-S14-16-16*	Female	1	1	Braze Tubing Adapter	7	84.8 (3.34)	56.9 (2.24)	45 (1.77)	50 (1.97)	44.5 (1.75)	


Dust Caps and Dust Plugs

Dust Cap with Gasket	Dust Plug with Gasket	Body Size
5400-S6-4	5400-S8-4	1/4
5400-S6-8	5400-S8-8	-1/2
5400-S6-12	5400-S8-12	3/4
5400-S6-16	5400-S8-16	1




Adapter SAE 37° (JIC)

O-Ring	Brass	Steel	Body Size	Thread	Tube O.D. Size
22546-12	202220-4-4B	202220-4-4S	1/4	7/16-20	1/4
22546-12	202220-6-4B	202220-6-4S	1/4	9/16-18	3/8
22546-17	-	202220-6-8S	1/2	9/16-18	3/8
22546-17	202220-8-8B	202220-8-8S	1/2	3/4-16	1/2
22546-23	-	202220-10-12S	3/4	7/8-14	5/8
22546-23	-	202220-12-12S	3/4	1 1/16-12	3/4
22546-28	-	202220-16-16S	3/4	1 3/16-12	1




Adapter – Braze

O-Ring	Brass	Steel	Body Size	Thread	Tube O.D. Size
22546-12	202208-4-4B	-	1/4	1/2-20	1/4
22546-17	202208-4-8B	-	1/2	7/8-20	1/2
22546-12	202208-6-4B	-	1/4	1/2-20	3/8
22546-17	202208-6-8B	-	1/2	7/8-20	3/8
22546-17	202208-8-8B	-	1/2	7/8-20	1/2
2254617	202208-10-8B	202208-10-8S	1/2	7/8-20	5/8
22546-23	202208-10-12B	202208-10-12S	3/4	1 1/4-18	5/8
22546-23	202208-12-12B	-	3/4	1 1/4-18	3/4
22546-23	202208-14-12B	-	1	1 1/4-18	7/8
22546-28	202208-14-16B	-	1	1 19/32-20	7/8
22546-28	202208-16-16B	-	1	1 19/32-20	1
22546-28	202208-18-16B	-	1	1 19/32-20	1 1/8
22546-28	202208-20-16B	-	1	1 19/32-20	1 3/16
22546-28	202208-22-16B	-	1	1 19/32-20	1 1/4



Hose Fitting SAE 100R5†

O-Ring	Fitting Assembly	Body Size	Hose Size	Thread	Dimensions D
					mm (in)
22546-12	487-4-4S	1/4	-4	1/2-20	23.4 (.92)
22546-12	487-4-6S	1/4	-6	1/2-20	24.4 (.96)
22546-17	487-8-6S	1/2	-6	7/8-20	24.4 (.96)
22546-17	487-8-8S	1/2	-8	7/8-20	26.9 (1.06)
22546-23	487-12-10S	3/4	-10	1 1/4-18	27.2 (1.07)
22546-23	487-12-12S	3/4	-12	1 1/4-18	27.2 (1.07)
22546-28	487-16-16S	1	-16	1 19/32-20	25.7 (1.01)



†Additional dash styles available.

5400 Series

Low Air Inclusion Refrigerant

FLUID TRANSFER
AND HYDRAULIC

PNEUMATIC

SPECIAL APPLICATIONS

DIAGNOSTIC

AGRICULTURE

REFRIGERANT


For assemblies, order by components as shown by base number and dash (-) size below. Example, if a 5401-S14-10-12 is required, order as components, (1) 5400-S5-12, (1) 202208-10-12B Adapter and (1) 22546-23 O-Ring.

Assembly Part Number	5400-S2 Female Half	Quantity	5400-S5 Male Half	Quantity	202208-Brass Braze-On Adapter	Quantity	202220-Steel 37° SAE Adapter	Quantity	22546 O-Ring	Quantity
5401-S14-10-12		-12	1		-10 -12B	1			-23	1
5401-S14-10-8		-8	1		-10 -8B				-17	1
5401-S14-12-12		-12	1		-12 -12B	1			-23	1
5401-S14-16-16		-16	1		-16 -16B	1			-28	1
5401-S14-4-4		-4	1		-4 -4B	1			-12	1
5401-S14-6-4		-4	1		-6 -4B	1			-12	1
5401-S14-6-8		-8	1		-6 -8B	1			-17	1
5401-S14-8-8		-8	1		-8 -8B	1			-17	1
5401-S17-10-12	-12	1			-10 -12B	1			-23	1
5401-S17-10-8	-8	1			-10 -8B	1			-17	1
5401-S17-12-12	-12	1			-12 -12	1			-23	1
5401-S17-14-16	-16	1			-16 -16	1			-28	1
5401-S17-4-4	-4	1			-4 -4B	1			-17	1
5401-S17-6-4	-4	1			-6 -4B	1			-12	1
5401-S17-6-8	-8	1			-6 -8B	1			-17	1
5401-S17-8-8	-8	1			-8 -8B	1			-17	1
5410-12-12	-12	1	-12	1			-12 -12S	2	-23	2
5410-16-16	-16	1	-16	1			-16 -16S	2	-28	2
5410-4-4	-4	1	-4	1			-4 -4S	2	-12	2
5410-6-8	-8	1	-8	1			-6 -8S	2	-17	2
5410-8-8	-8	1	-8	1			-8 -8S	2	-17	2
5410-S14-10-12		-12	1				-10 -12S	1	-23	1
5410-S14-12-12		-12	1				-12 -12S	1	-23	1
5410-S14-16-16		-16	1				-16 -16S	1	-28	1
5410-S14-4-4		-4	1				-4 -4S	1	-12	1
5410-S14-6-4		-4	1				-6 -4S	1	-12	1
5410-S14-6-8		-8	1				-6 -8S	1	-17	1
5410-S14-8-8		-8	1				-8 -8S	1	-17	1
5410-S17-10-12	-12	1					-10 -12S	1	-23	1
5410-S17-12-12	-12	1					-12 -12S	1	-23	1
5410-S17-16-16	-16	1					-16 -16S	1	-28	1
5410-S17-4-4	-4	1					-4 -4S	1	-12	1
5410-S17-6-4	-4	1					-6 -4S	1	-12	1
5410-S17-6-8	-8	1					-6 -8S	1	-17	1
5410-S17-8-8	-8	1					-8 -8S	1	-17	1

5400 Series

Low Air Inclusion Refrigerant

Assembly Instructions/Component Part Numbers

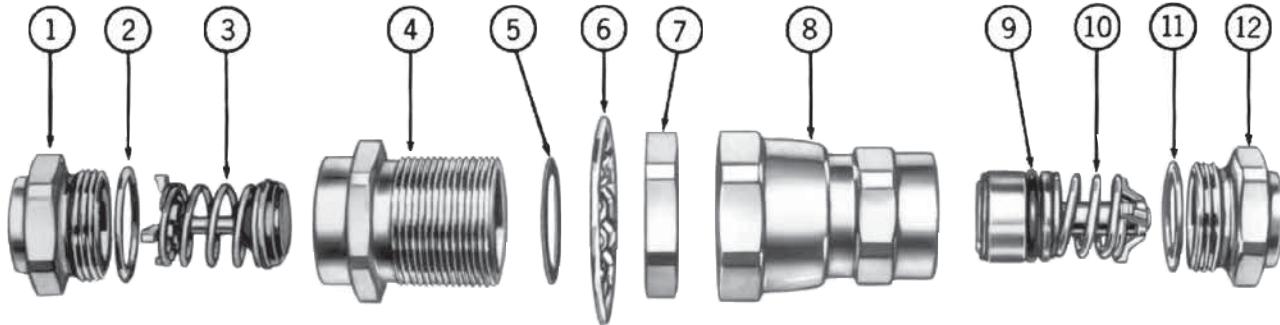

Typical Male Coupling Half (S2)

Assembly Instructions

Steps:

- After tubing or hose has been connected to adapters ① and ⑫, install O-Rings ② and ⑪† on adapters. Be sure O-Rings are not twisted.
- Oil O-Rings ② and ⑪ liberally with system fluid to prevent them from scuffing and tearing when coupling body is threaded on adapter.
- S2 Half—Lubricate poppet face with system fluid. Insert poppet valve assembly ③ into body ④. Tighten body ④ on adapter ①. After body and adapter make metal-to-metal contact, tighten by rotating body ④ 1/8" with respect to adapter ① or torque per table value.
S5 Half—Oil O-Ring ⑪† liberally with system fluid. Insert valve and sleeve assembly 10 into body ⑧. Tighten body ⑧ on adapter ⑫. After body and adapter make metal-to-metal contact, tighten by rotating body ⑧ 1/8" with respect to adapter ⑫ or torque per table value.
- Coupling Connection—Lubricate gasket seal ⑤ on 5400-S2 half with system fluid. Thread union nut ⑦ on 5400-S2 half. Tighten union nut to torque values shown in table. Be sure S2 and S5 bodies do not rotate during connection.

Component Part Numbers

Item Number	Dash Size → O.D. Tube Size →	-4 1/4"-3/8"	-8 1/4"-5/8"	-12 5/8"-7/8"	-16 7/8"-13/8"	Line Ref.
Typical Male Half						
1	Tubing Adapter	202208-*4	202208-*8	202208-*12	202208-*16	2
2	O-Ring	22546-12	22546-17	22546-23	22546-28	3
3	Poppet Valve Assembly	5400-S20-4	5400-S20-8	5400-S20-12	5400-S20-16	4
4	Body	5400-17-4S	5400-17-8S	5400-17-12S	5400-17-16S	5
5	Gasket Seal	22008-4	22008-8	22008-12	22008-16	6
6	Lock Washer	5400-54-4S	5400-54-8S	5400-54-12S	5400-54-16S	7
7	Jam Nut	5400-53-4S	5400-53-8S	5400-53-12S	5400-53-16S	8
Typical Female Half						
8	Union Nut and Body Assembly	5400-S16-4	5400-S16-8	5400-S16-12	5400-S16-16	10
9	O-Ring	FF91178-10	FF91178-112	FF91178-116	FF91178-214	11
10	Valve and Sleeve Assembly	5400-S19-4	5400-S19-8	5400-S19-12	5400-S19-16	12
11	O-Ring	22546-12	22546-17	22546-23	22546-28	13
12	Tubing Adapter	202208-*4	202208-*8	202208-*12	202208-*16	14

*Specify O.D. Tubing size of adapter required in 16th of an inch. Example: -4 coupling with 3/8" O.D. tubing is 6/16 or -6. Part number is then 202208-6-4.

Notes

Notes

PowerFlex Fluid Handling Products B.V.

Flevolaan 62g , 1382 JZ Weesp.
Tel : +31 (0)294 450 200
Fax: +31 (0)294 410 045
www.powerflex-fhp.nl
info@powerflex-fhp.nl